



PVC Cable Ducting BVDF Series

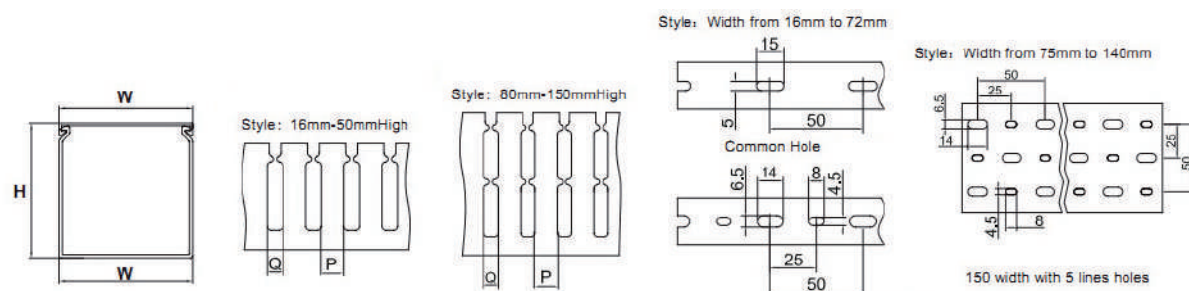

Specification

- Material: PVC
- Work Temperature: -40°C to 65°C
- Flammability Rating: UL94 V-0
- Color Option: Gray, white, blue, black and other special colors
- Certificates: UL, CE, RoHS, REACH
- Standard Length: 2M/PCS


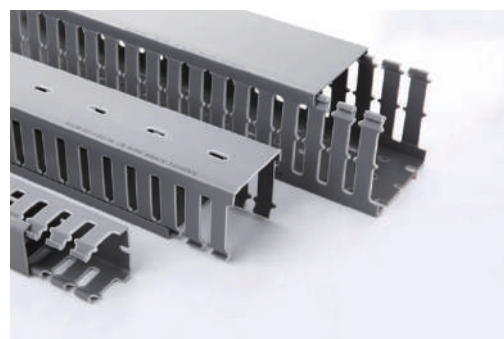


Features


- Our Wide Slotted Cable Ducting is designed to provide you with high quality cable ducting with round edges to protect wires and hands from abrasions.

Item No.	W*H	Hole width (Q)	Tooth width (P)	Wire capacity (2.0 square feet)	Packing / M
BVD2530F	25*30	8	12	25-35 PCS	100
BVD2540F	25*40	8	12	20-25 PCS	112
BVD2560F	25*60	8	12	40-50 PCS	100
BVD2580F	25*80	8	12	100-200 PCS	72
BVD3030F	30*30	8	12	25-35 PCS	120
BVD3050F	30*50	8	12	25-40 PCS	84
BVD3060F	30*60	8	12	60-80 PCS	84
BVD3080F	30*80	8	12	110-125 PCS	56
BVD4030F	40*30	8	12	30-40 PCS	100
BVD4040F	40*40	8	12	60-70 PCS	100

Item No.	W*H	Hole width (Q)	Tooth width (P)	Wire capacity (2.0 square feet)	Packing / M
BVD4050F	40*50	8	12	65-75 PCS	100
BVD4060F	40*60	8	12	100-115 PCS	72
BVD4080F	40*80	8	12	140-160 PCS	80
BVD5030F	50*30	8	12	40-50 PCS	100
BVD5050F	50*50	8	12	80-90 PCS	60
BVD5060F	50*60	8	12	120-135 PCS	60
BVD5080F	50*80	8	12	160-180 PCS	80
BVD50100F	50*100	8	12	220-250 PCS	40
BVD6030F	60*30	8	12	40-50 PCS	80
BVD6040F	60*40	8	12	100-115 PCS	68
BVD6050F	60*50	8	12	100-120 PCS	52
BVD6060F	60*60	8	12	120-135 PCS	48
BVD6080F	60*80	8	12	180-210 PCS	32
BVD60100F	60*100	8	12	240-290 PCS	32
BVD70100F	70*100	8	12	250-310 PCS	24
BVD8040F	80*40	8	12	120-135 PCS	48
BVD8050F	80*50	8	12	160-180 PCS	40
BVD8060F	80*60	8	12	180-210 PCS	36
BVD8080F	80*80	8	12	240-290 PCS	24
BVD80100F	80*100	8	12	260-350 PCS	24
BVD10060F	100*60	8	12	240-290 PCS	32
BVD10080F	100*80	8	12	260-350 PCS	24
BVD100100F	100*100	8	12	300-400 PCS	24
BVD12040F	120*40	8	12	140-155 PCS	16
BVD12060F	120*60	8	12	260-320 PCS	16
BVD12080F	120*80	8	12	280-380 PCS	16
BVD120100F	120*100	8	12	350-450 PCS	16

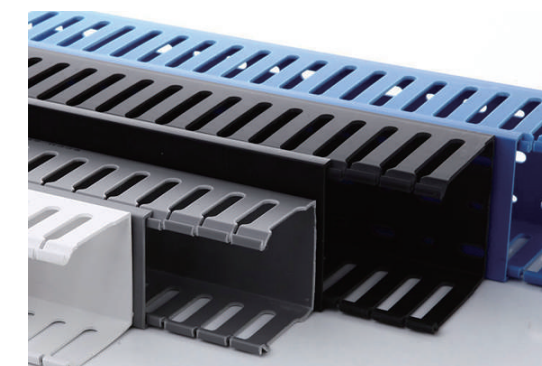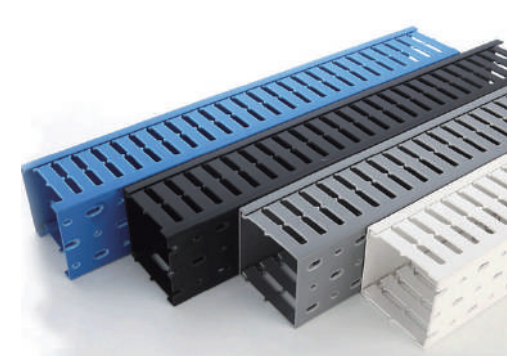


PVC Halogen Free Cable Ducting BHVDF Series

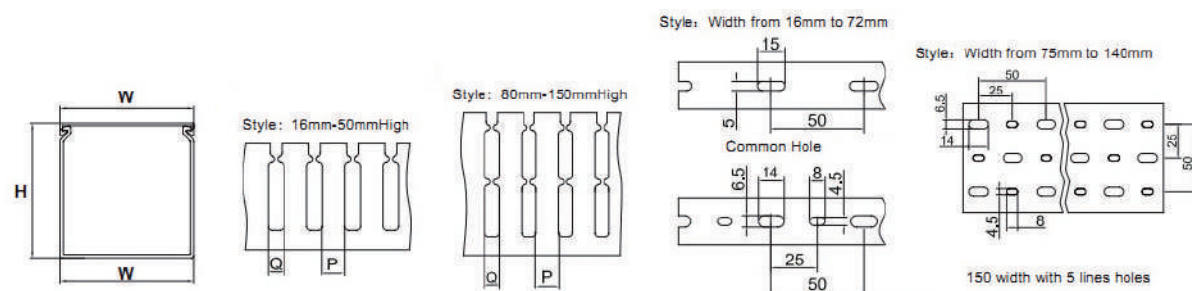

Specification

- Material: PVC
- Work Temperature: -40°C to 65°C
- Flammability Rating: UL94 V-0
- Color Option: Gray, white, blue, black and other special colors
- Certificates: UL, CE, RoHS, REACH
- Standard Length: 2M/PCS
- Halogen Free

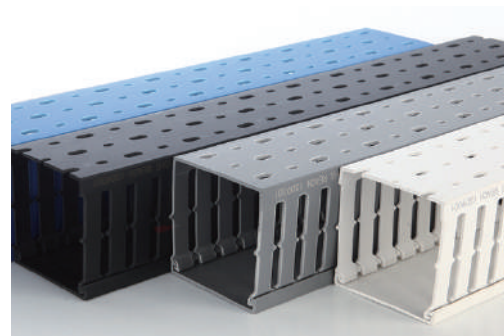


Features

- Our Wide Slotted Cable Ducting is designed to provide you with high quality cable ducting with round edges to protect wires and hands from abrasions.

Item No.	W*H	Hole width (Q)	Tooth width (P)	Wire capacity (2.0 square feet)	Packing / M
BHVD2530F	25*30	4	6	25-35 PCS	100
BHVD2540F	25*40	4	6	20-25 PCS	112
BHVD2560F	25*60	4	6	40-50 PCS	100
BHVD2580F	25*80	4	6	100-200 PCS	72
BHVD3030F	30*30	4	6	25-35 PCS	120
BHVD3050F	30*50	4	6	25-40 PCS	84
BHVD3060F	30*60	4	6	60-80 PCS	84
BHVD3080F	30*80	4	6	110-125 PCS	56
BHVD4030F	40*30	4	6	30-40 PCS	100
BHVD4040F	40*40	4	6	60-70 PCS	100


Item No.	W*H	Hole width (Q)	Tooth width (P)	Wire capacity (2.0 square feet)	Packing / M
BHVD4050F	40*50	4	6	65-75 PCS	100
BHVD4060F	40*60	4	6	100-115 PCS	72
BHVD4080F	40*80	4	6	140-160 PCS	80
BHVD5030F	50*30	4	6	40-50 PCS	100
BHVD5050F	50*50	4	6	80-90 PCS	60
BHVD5060F	50*60	4	6	120-135 PCS	60
BHVD5080F	50*80	4	6	160-180 PCS	80
BHVD50100F	50*100	4	6	220-250 PCS	40
BHVD6030F	60*30	4	6	40-50 PCS	80
BHVD6040F	60*40	4	6	100-115 PCS	68
BHVD6050F	60*50	4	6	100-120 PCS	52
BHVD6060F	60*60	4	6	120-135 PCS	48
BHVD6080F	60*80	4	6	180-210 PCS	32
BHVD60100F	60*100	4	6	240-290 PCS	32
BHVD70100F	70*100	4	6	250-310 PCS	24
BHVD8040F	80*40	4	6	120-135 PCS	48
BHVD8050F	80*50	4	6	160-180 PCS	40
BHVD8060F	80*60	4	6	180-210 PCS	36
BHVD8080F	80*80	4	6	240-290 PCS	24
BHVD80100F	80*100	4	6	260-350 PCS	24
BHVD10060F	100*60	4	6	240-290 PCS	32
BHVD10080F	100*80	4	6	260-350 PCS	24
BHVD100100F	100*100	4	6	300-400 PCS	24
BHVD12040F	120*40	4	6	140-155 PCS	16
BHVD12060F	120*60	4	6	260-320 PCS	16
BHVD12080F	120*80	4	6	280-380 PCS	16
BHVD120100F	120*100	4	6	350-450 PCS	16

PVC Cable Ducting BVD Series

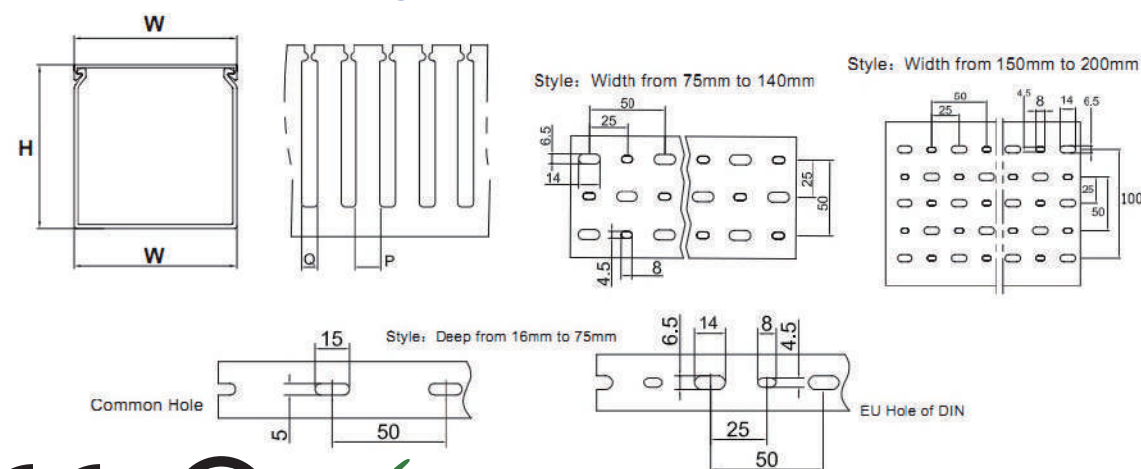

Specification

- Material: PVC
- Work Temperature: -40°C to 65°C
- Flammability Rating: UL94 V-0
- Color Option: Gray, white, blue, black and other special colors
- Certificates: UL, CE, RoHS, REACH
- Standard Length: 2M/PCS

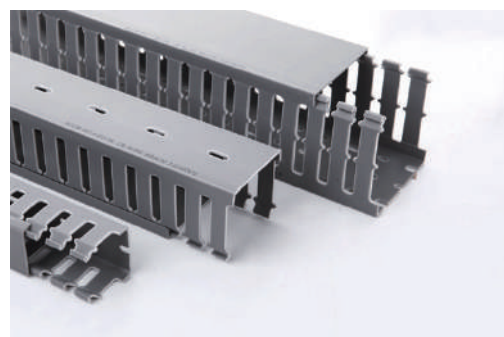


Features


- Our Wide Slotted Cable Ducting is designed to provide you with high quality cable ducting with round edges to protect wires and hands from abrasions.

Item No.	W*H	Hole width (Q)	Tooth width (P)	Wire capacity (2.0 square feet)	Packing / M
BVD2580	25*80	8	12	100~120pcs	72M
BVD3080	30*80	8	12	110~125pcs	56M
BVD3580	35*80	8	12	110~130pcs	56M
BVD4080	40*80	8	12	140~160pcs	48M
BVD4580	45*80	8	12	140~160pcs	40M
BVD5080	50*80	8	12	160~180pcs	40M
BVD5580	55*80	8	12	160~180pcs	32M
BVD6080	60*80	8	12	180~210pcs	32M
BVD8080	80*80	8	12	240~290pcs	24M
BVD10080	100*80	8	12	260~350pcs	24M

Item No.	W*H	Hole width (Q)	Tooth width (P)	Wire capacity (2.0 square feet)	Packing / M
BVD12080	120*80	8	12	280~380pcs	16M
BVD14080	140*80	8	12	350~450pcs	16M
BVD25100	25*100	8	12	110~160pcs	60M
BVD33100	33*100	8	12	130~165pcs	44M
BVD40100	40*100	8	12	130~175pcs	40M
BVD50100	50*100	8	12	220~250pcs	40M
BVD60100	60*100	8	12	240~290pcs	32M
BVD70100	70*100	8	12	240~290pcs	32M
BVD75100	75*100	8	12	260~350pcs	24M
BVD80100	80*100	8	12	260~350pcs	24M
BVD100100	100*100	8	12	300~400pcs	24M
BVD120100	120*100	8	12	350~450pcs	16M
BVD150100	150*10	8	12	400~650pcs	16M

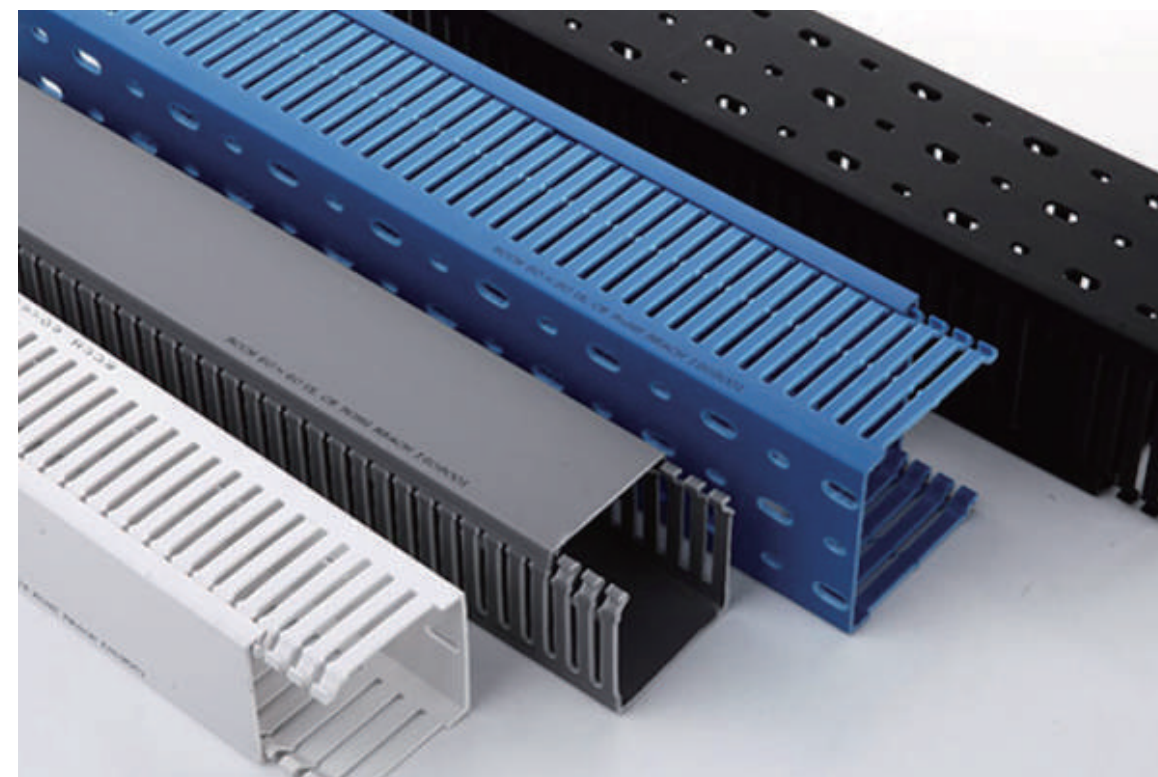

PVC Cable Ducting BHVD Series

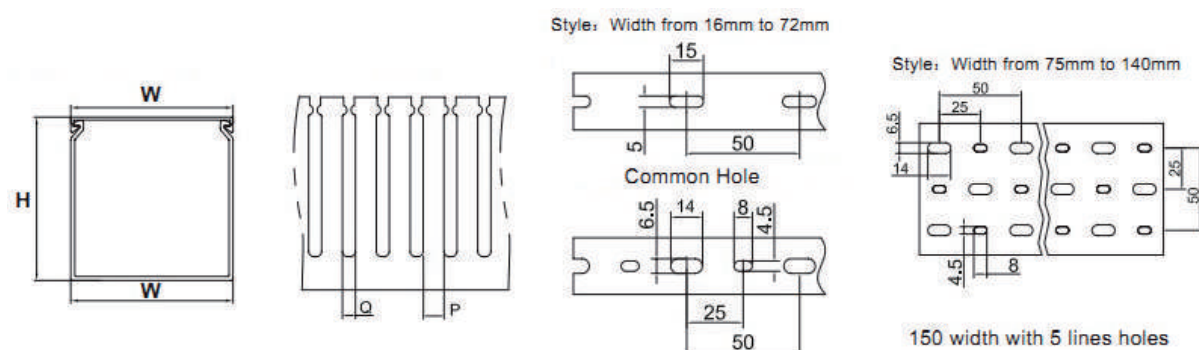

Specification

- Material: PVC
- Work Temperature: -40°C to 65°C
- Flammability Rating: UL94 V-0
- Color Option: Gray, white, blue, black and other special colors
- Certificates: UL, CE, RoHS, REACH
- Standard Length: 2M/PCS




Features

- Our Wide Slotted Cable Ducting is designed to provide you with high quality cable ducting with round edges to protect wires and hands from abrasions.

Item No.	W*H	Hole width (Q)	Tooth width (P)	Wire capacity (2.0 square feet)	Packing / M
BHVD1520	15*20	5	8	8-12pcs	260M
BHVD2020	20*20	5	8	10-20pcs	240M
BHVD4020	40*20	5	8	15-30pcs	140M
BHVD2025	20*25	5	8	5~15pcs	200M
BHVD2525	25*25	5	8	10~25pcs	200M
BHVD3025	30*25	5	8	12~28pcs	160M
BHVD4025	40*25	5	8	20-35pcs	100M
BHVD5025	50*25	5	8	12-28pcs	100M
BHVD1530	15*30	5	8	8-15pcs	180M
BHVD2030	20*30	5	8	25-35pcs	160M

Item No.	W*H	Hole width (Q)	Tooth width (P)	Wire capacity (2.0 square feet)	Packing / M
BHVD2530	25*30	5	8	25~35pcs	160M
BHVD3030	30*30	5	8	25~35pcs	140M
BHVD4030	40*30	5	8	30~40pcs	100M
BHVD5030	50*30	5	8	40-50pcs	80M
BHVD6030	60*30	5	8	50-60pcs	60M
BHVD2040	20*40	5	8	16-22pcs	11M
BHVD2540	25*40	5	8	20~25pcs	112M
BHVD3540	35*40	5	8	30-45pcs	100M
BHVD4040	40*40	5	8	60~70pcs	100M
BHVD6040	60*40	5	8	100~115pcs	68M
BHVD8040	80*40	5	8	120~135pcs	48M
BHVD2050	20*50	5	8	18-28pcs	100M
BHVD2550	25*50	5	8	20~30pcs	100M
BHVD3050	30*50	5	8	25~40pcs	84M
BHVD4050	40*50	5	8	60~70pcs	68M
BHVD4550	45*50	5	8	70~80pcs	60M
BHVD5050	50*50	5	8	80~90pcs	50M
BHVD6050	60*50	5	8	100~120pcs	48M
BHVD3060	30*60	5	8	60~80pcs	80M
BHVD4060	40*60	5	8	100~115pcs	60M
BHVD4560	45*60	5	8	110~125pcs	30M
BHVD5060	50*60	5	8	120~135pcs	60M
BHVD6060	60*60	5	8	120~135pcs	48M
BHVD8060	80*60	5	8	180~210pcs	36M
BHVD10060	100*60	5	8	240~290pcs	28M
BHVD2580	25*80	5	8	100~120pcs	72M
BHVD3080	30*80	5	8	110~125pcs	56M
BHVD4080	40*80	5	8	140~160pcs	48M
BHVD5080	50*80	5	8	160~180pcs	40M
BHVD6080	60*80	5	8	180~210pcs	32M
BHVD8080	80*80	5	8	240~290pcs	24M
BHVD10080	100*80	5	8	260~350pcs	24M
BHVD40100	40*100	5	8	130~175pcs	40M
BHVD50100	50*100	5	8	220~250pcs	40M
BHVD60100	60*100	5	8	240~290pcs	32M
BHVD70100	40*100	5	8	250-340pcs	24M
BHVD80100	80*100	5	8	260~350pcs	24M
BHVD100100	100*100	5	8	300-400pcs	24M
BHVD80100	80*100	5	8	260~350pcs	24M
BHVD100100	100*100	5	8	300-400pcs	24M

PVC Cable Ducting BVDC Series

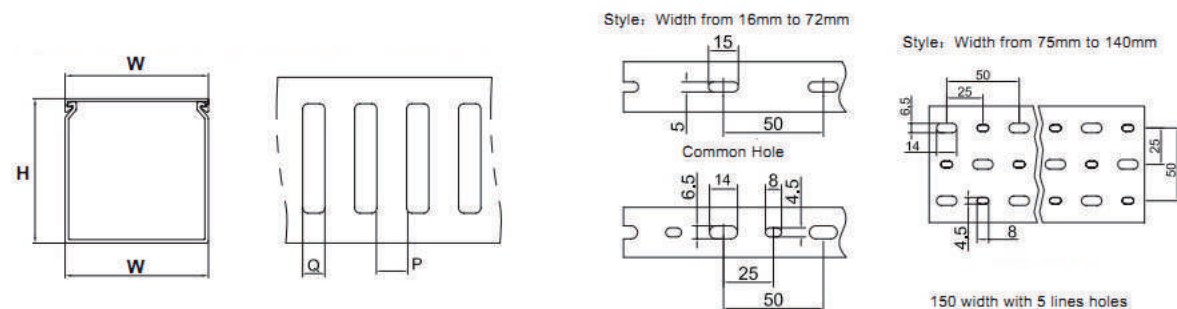

Specification

- Material: PVC
- Work Temperature: -40°C to 65°C
- Flammability Rating: UL94 V-0
- Color Option: Gray, white, blue, black and other special colors
- Certificates: UL, CE, RoHS, REACH
- Standard Length: 2M/PCS

Features


- Our Wide Slotted Cable Ducting is designed to provide you with high quality cable ducting with round edges to protect wires and hands from abrasions.



Item No.	W*H	Hole width (Q)	Tooth width (P)	Wire capacity (2.0 square feet)	Packing / M
BVD2530C	25*30	8.5	11.5	25~35pcs	160M
BVD3030C	30*30	8.5	11.5	25~35pcs	140M
BVD4030C	40*30	8.5	11.5	30~40pcs	100M
BVD5030C	50*30	8.5	11.5	40~50pcs	80M
BVD6030C	60*30	8.5	11.5	50~60pcs	60M
BVD2035C	20*35	8.5	11.5	30~40pcs	100M
BVD2040C	20*40	8.5	11.5	16~22pcs	110M
BVD2540C	25*40	8.5	11.5	20~25pcs	112M
BVD3540C	35*40	8.5	11.5	35~45pcs	100M
BVD4040C	40*40	8.5	11.5	60~70pcs	100M


Item No.	W*H	Hole width (Q)	Tooth width (P)	Wire capacity (2.0 square feet)	Packing / M
BVD6040C	60*40	8.5	11.5	100~115pcs	68M
BVD8040C	80*40	8.5	11.5	120~135pcs	48M
BVD10040C	100*40	8.5	11.5	120~135pcs	32M
BVD2050C	20*50	8.5	11.5	18~28pcs	120M
BVD3050C	30*50	8.5	11.5	25~40pcs	84M
BVD4050C	40*50	8.5	11.5	60~70pcs	68M
BVD5050C	50*50	8.5	11.5	80~90pcs	60M
BVD6050C	60*50	8.5	11.5	100~120pcs	48M
BVD8050C	80*50	8.5	11.5	160~180pcs	40M
BVD10050C	100*50	8.5	11.5	200~250pcs	26M
BVD2060C	20*60	8.5	11.5	35~45pcs	100M
BVD2560C	25*60	8.5	11.5	40~50pcs	100M
BVD4060C	40*60	8.5	11.5	100~115pcs	60M
BVD5060C	50*60	8.5	11.5	120~135pcs	60M
BVD6060C	60*60	8.5	11.5	120~135pcs	48M
BVD8060C	80*60	8.5	11.5	180~210pcs	36M
BVD10060C	100*60	8.5	11.5	240~290pcs	28M
BVD3080C	30*80	10	10	110~125pcs	56M
BVD4080C	40*80	10	10	140~160pcs	48M
BVD5080C	50*80	10	10	160~180pcs	40M
BVD6080C	60*80	10	10	180~210pcs	32M
BVD8080C	80*80	10	10	240~290pcs	24M
BVD10080C	100*80	10	10	260~350pcs	24M
BVD40100C	40*100	10	10	130~175pcs	40M
BVD50100C	50*100	10	10	220~250pcs	40M
BVD60100C	60*100	10	10	240~290pcs	32M
BVD70100C	70*100	10	10	250~280pcs	24M
BVD75100C	75*100	10	10	260~350pcs	24M
BVD80100C	80*100	10	10	260~350pcs	24M
BVD100100C	100*100	10	10	300~400pcs	24M
BVD120100C	120*100	10	10	350~450pcs	20M
BVD150100C	150*100	10	10	400~650pcs	16M
BVD100130C	100*130	10	10	350~450pcs	16M
BVD200100C	200*100	10	10	600~800pcs	/
BVD200150C	200*150	10	10	900~1200pcs	/

PVC Cable Ducting BVDT Series

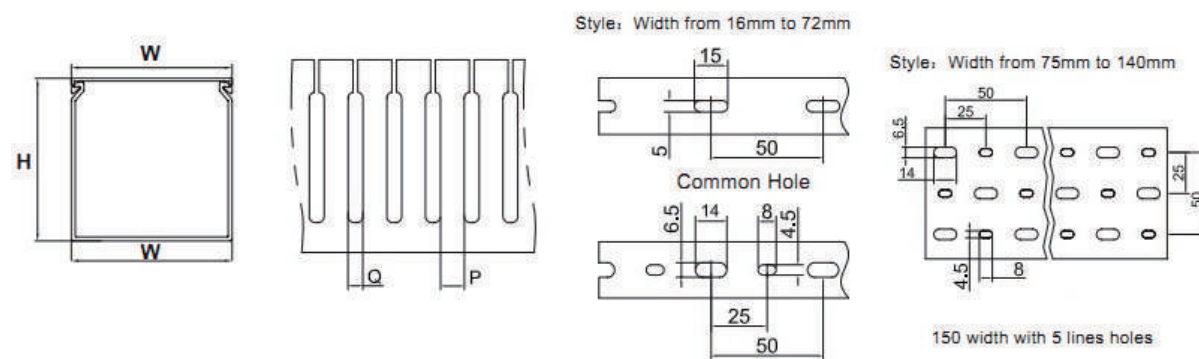

Specification

- Material: PVC
- Work Temperature: -40°C to 65°C
- Flammability Rating: UL94 V-0
- Color Option: Gray, white, blue, black and other special colors
- Certificates: UL, CE, RoHS, REACH
- Standard Length: 2M/PCS

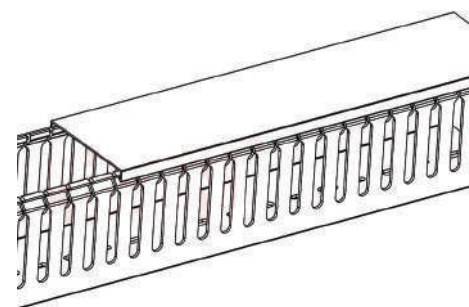


Features


- Our Wide Slotted Cable Ducting is designed to provide you with high quality cable ducting with round edges to protect wires and hands from abrasions.

Item No.	W*H	Hole width (Q)	Tooth width (P)	Wire capacity (2.0 square feet)	Packing / M
BVD2560T	25*60	8	10	40~50pcs	100M
BVD3060T	30*60	8	10	60~80pcs	80M
BVD3560T	35*60	8	10	90~105pcs	78M
BVD4060T	40*60	8	10	100~115pcs	60M
BVD4560T	45*60	8	10	110~125pcs	30M
BVD5060T	50*60	8	10	120~135pcs	60M
BVD6060T	60*60	8	10	120~135pcs	48M
BVD8060T	80*60	8	10	180~210pcs	36M
BVD10060T	100*60	8	10	240~290pcs	28M
BVD2580T	25*80	8	10	100~120pcs	72M

Item No.	W*H	Hole width (Q)	Tooth width (P)	Wire capacity (2.0 square feet)	Packing / M
BVD3080T	30*80	8	10	110~125pcs	56M
BVD3580T	35*80	8	10	110~130pcs	56M
BVD4080T	40*80	8	10	140~160pcs	48M
BVD4580T	45*80	8	10	140~160pcs	40M
BVD5080T	50*80	8	10	160~180pcs	40M
BVD5580T	55*80	8	10	160~180pcs	32M
BVD6080T	60*80	8	10	180~210pcs	32M
BVD8080T	80*80	8	10	240~290pcs	24M
BVD10080T	100*80	8	10	260~350pcs	24M
BVD12080T	120*80	8	10	280~380pcs	16M
BVD33100T	33*100	8	10	130~165 pcs	44M
BVD40100T	40*100	8	10	130~175 pcs	40M
BVD50100T	50*100	8	10	220~250 pcs	40M
BVD60100T	60*100	8	10	240~290 pcs	32M
BVD70100T	70*100	8	10	250~340 pcs	24M
BVD75100T	75*100	8	10	260~350 pcs	24M
BVD80100T	80*100	8	10	260~350 pcs	24M
BVD100100T	100*100	8	10	300~400pcs	24M

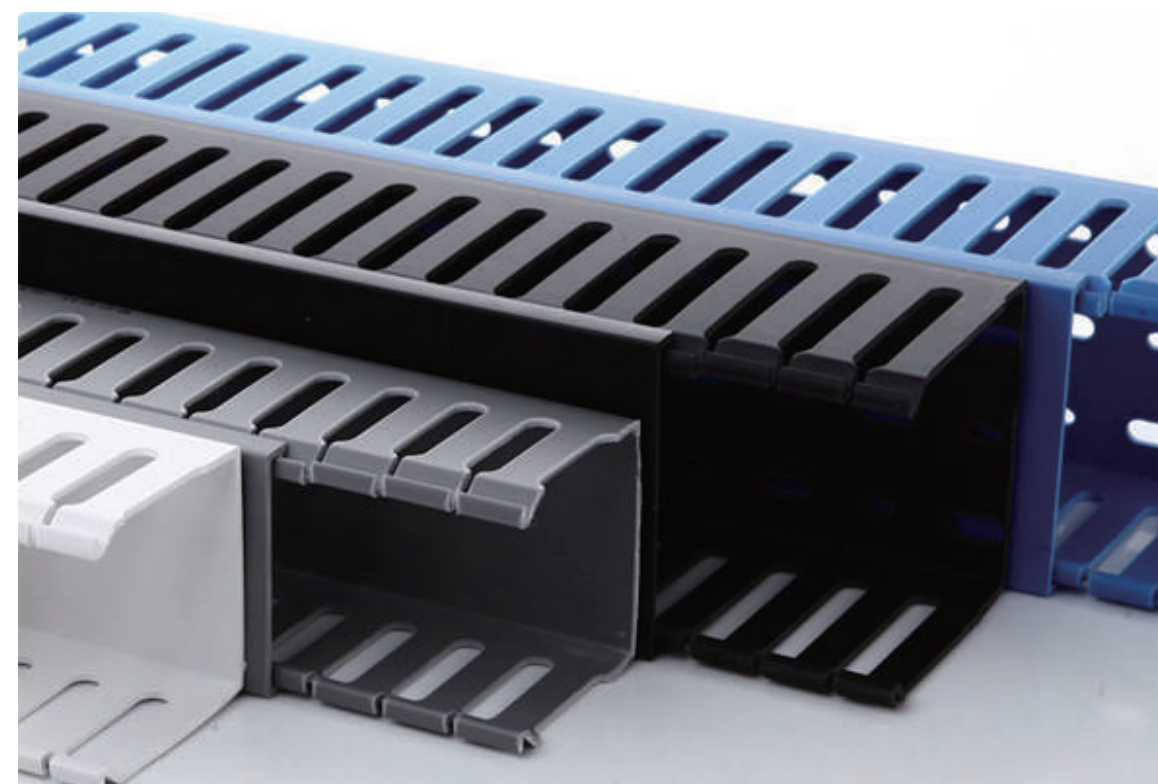


PVC Cable Ducting BSD Series

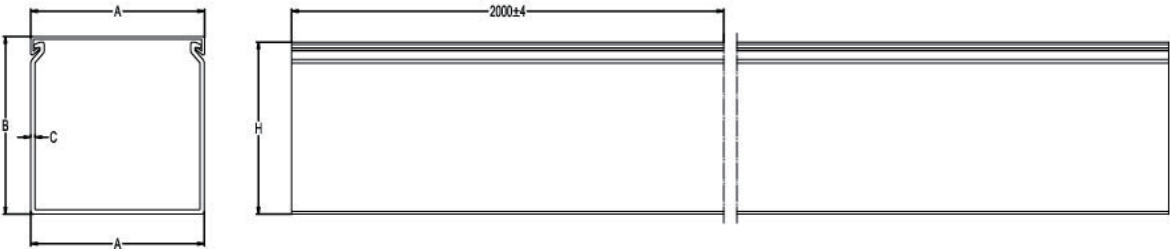

Specification

- Material: PVC
- Work Temperature: -40°C to 110°C
- Flammability Rating: UL94 V-0
- Color Option: Gray, white, blue, black and other special colors
- Certificates: UL, CE, RoHS, REACH
- Standard Length: 2M/PCS




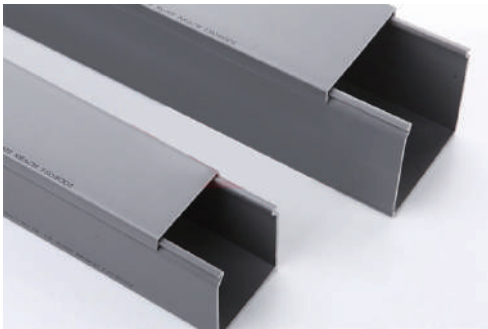


Features


- Our Wide Slotted Cable Ducting is designed to provide you with high quality cable ducting with round edges to protect wires and hands from abrasions.

Item No.	W*H	Wire capacity (2.0 square feet)	Packing / M
BSD2020	20*20	10~20pcs	240M
BSD4020	40*20	20~30pcs	140M
BSD2030	20*30	25~35pcs	180M
BSD3030	30*30	25~35pcs	140M
BSD4030	40*30	30~40pcs	100M
BSD5030	50*30	40~50pcs	80M
BSD6030	60*30	50~60pcs	60M
BSD2540	25*40	20~25pcs	112M
BSD3540	35*40	50~60pcs	100M
BSD4040	40*40	60~70pcs	100M

Item No.	W*H	Wire capacity (2.0 square feet)	Packing / M
BSD6040	60*40	100~115pcs	68M
BSD8040	80*40	120~135pcs	48M
BSD10040	100*40	120~135pcs	32M
BSD2050	20*50	20~30pcs	100M
BSD3050	30*50	25~40pcs	84M
BSD4050	40*50	60~70pcs	68M
BSD5050	50*50	80~90pcs	60M
BSD6050	60*50	100~120pcs	48M
BSD7550	75*50	140~160pcs	40M
BSD8050	80*50	160~180pcs	40M
BSD10050	100*50	200~250pcs	26M
BSD2060	20*60	5~45pcs	100M
BSD3060	30*60	60~80pcs	80M
BSD4060	40*60	100~115pcs	60M
BSD5060	50*60	120~135pcs	60M
BSD6060	60*60	120~135pcs	48M
BSD8060	80*60	180~210pcs	36M
BSD10060	100*60	240~290pcs	28M
BSD3080	30*80	110~125pcs	56M
BSD4080	40*80	140~160pcs	48M
BSD5080	50*80	160~180pcs	40M
BSD5580	55*80	160~180pcs	32M
BSD6080	60*80	180~210pcs	32M
BSD8080	80*80	240~290pcs	24M
BSD10080	100*80	260~350pcs	24M
BSD40100	40*100	130~175pcs	40M
BSD50100	50*100	220~250pcs	40M
BSD60100	60*100	240~290pcs	32M
BSD70100	70*100	240~290pcs	32M
BSD80100	80*100	260~350pcs	24M
BSD100100	100*100	300~400pcs	24M

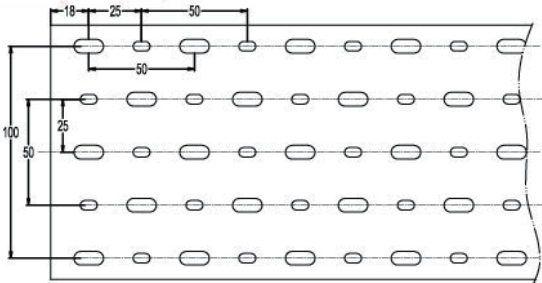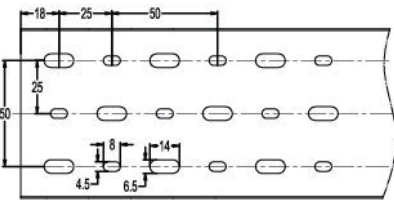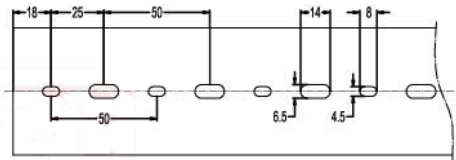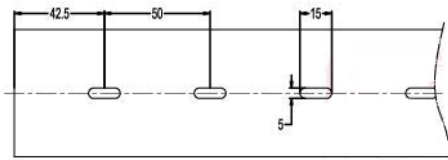

PVC Cable Ducting BVDCL Series

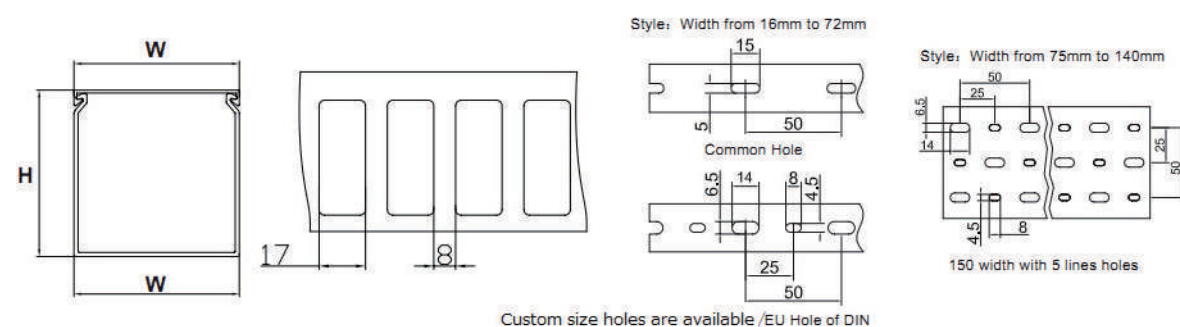

Specification

- Material: PVC
- Work Temperature: -40°C to 65°C
- Flammability Rating: UL94 V-0
- Color Option: Gray, white, blue, black and other special colors
- Certificates: UL, CE, RoHS, REACH
- Standard Length: 2M/PCS




Features

- Europe standard wide slot/finger design provides greater sidewall rigidity and can be used with a wide range of wire bundle sizes.

Item No.	W*H	Hole width (Q)	Tooth width (P)	Wire capacity (2.0 square feet)	Packing / M
BVD2560CL	25*60	17	8	40~50pcs	100
BVD3060CL	30*60	17	8	60~80pcs	80
BVD4060CL	40*60	17	8	100~115pcs	60
BVD4560CL	45*60	17	8	110~125pcs	30
BVD5060CL	50*60	17	8	120~135pcs	60
BVD6060CL	60*60	17	8	120~135pcs	48
BVD8060CL	80*60	17	8	180~210pcs	36
BVD10060CL	100*60	17	8	240~290pcs	48
BVD11060CL	110*60	17	8	250~300pcs	48

PVC Cable Ducting BRD Series

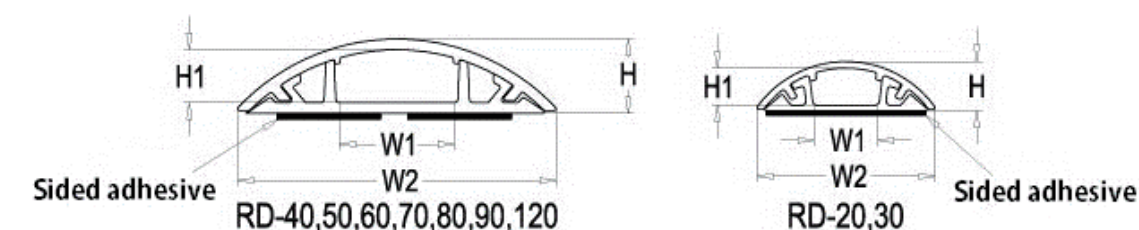

Specification

- Material: PVC
- Work Temperature: -40°C to 110°C
- Flammability Rating: UL94 V-0
- Color Option: Gray, white, blue, black and other special colors
- Certificates: UL, CE, RoHS, REACH
- Standard Length: 2M/PCS




Features

- Europe standard wide slot/finger design provides greater sidewall rigidity and can be used with a wide range of wire bundle sizes.


Item No.	W1	W2	H	H1	Length
BRD-20	20	8	6	4	1M or 2M Including trunking and lids
BRD-30	30	11	8	6.5	
BRD-40	40	12	11	8	
BRD-50	50	20	12.5	8.8	
BRD-70	70	20	16.5	12.7	
BRD-80	80	20	16.5	12.7	
BRD-90	90	25	19	15	
BRD-120	120	30	25	21	

PVC Cable Ducting Wall Divider

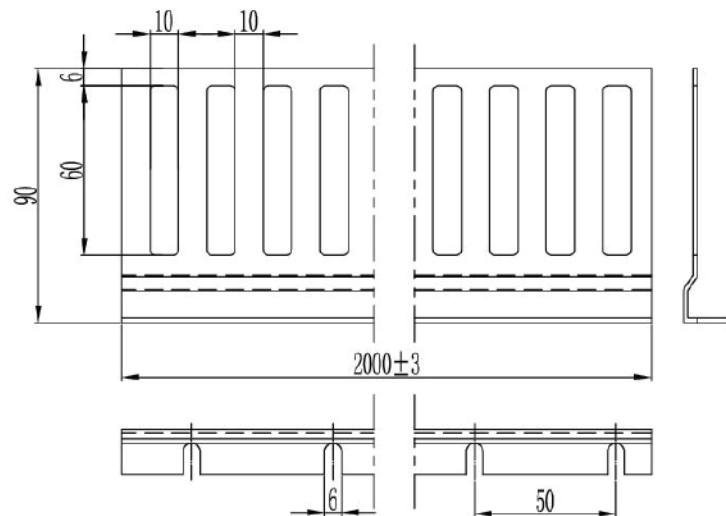

Specification

- Material: PVC
- Work Temperature: -40°C to 65°C
- Flammability Rating: UL94 V-0
- Color Option: Gray, white, blue, black and other special colors
- Standard Length: 2M/PCS

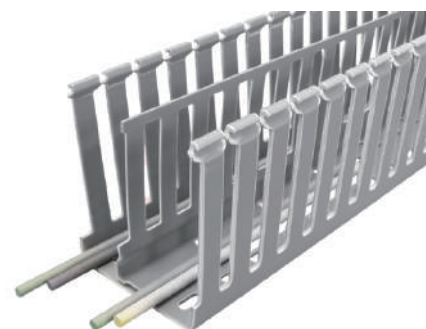


Features

- Close slot design.

Item No.	Suitable wiring duct height	Packing.
BVC4H	100mm	2M
BSR4H	100mm	2M
BVC2H	60mm	2M
SR2H	60mm	2M
Item No.	Suitable wiring duct height	Packing.
BVC4H	100mm	2M

Cable Ducting Retainer

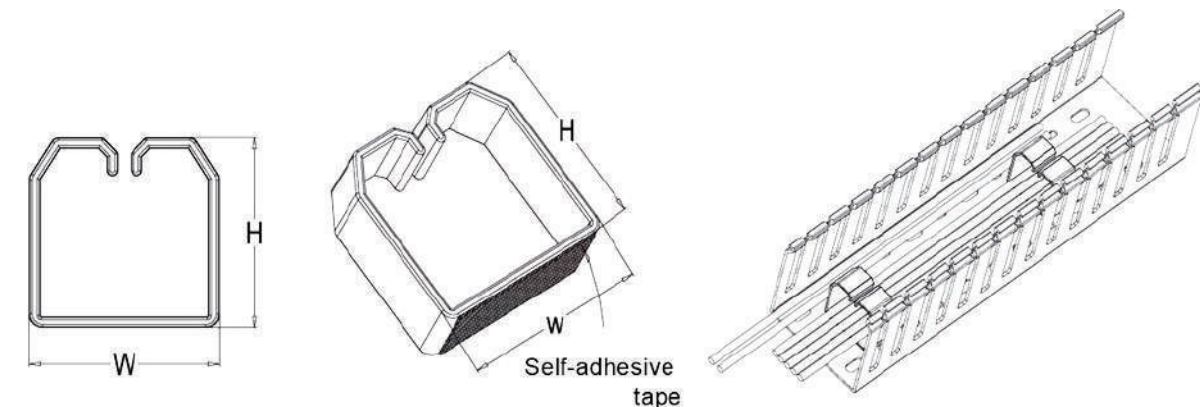

Specification

- Material: ABS
- Color Option: Gray, white, blue, black and other special colors
- Work Temperature: -40°C to 110°C



Features


Item No.	W*H (mm)
BWR-2040	20*40
BWR-4040	40*40
BWR-7040	70*40
BWR-2065	20*65
BWR-4065	40*65
BWR-6565	65*65

PVC Cable Ducting Lid BDC Series



Specification

- Material: PVC
- Work Temperature: -40°C to 65°C
- Flammability Rating: UL94 V-0
- Color Option: Gray, white, blue, black and other special colors
- Certificates: UL, CE, RoHS, REACH
- Standard Length: 2M/PCS

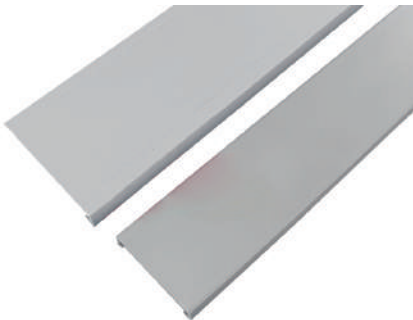

Features

Item No.	W (mm)	Suitable wiring duct Specifications (mm)	Item No.	W (mm)	Suitable wiring duct Specifications (mm)	Standard Length
BDC-15G	15	15wider wiring duct	BDC-60G	60	60wider wiring duct	Pcs/2M
BDC-16G	16	16wider wiring duct	BDC-65G	65	65wider wiring duct	
BDC-20G	20	20wider wiring duct	BDC-70G	70	70wider wiring duct	
BDC-22G	22	22wider wiring duct	BDC-72G	72	72wider wiring duct	
BDC-25G	25	25wider wiring duct	BDC-75G	75	75wider wiring duct	
BDC-30G	30	30wider wiring duct	BDC-80G	80	80wider wiring duct	
BDC-33G	33	33wider wiring duct	BDC-100G	100	100wider wiring duct	
BDC-35G	35	35wider wiring duct	BDC-110G	110	110wider wiring duct	
BDC-40G	40	40wider wiring duct	BDC-120G	120	120wider wiring duct	
BDC-45G	45	45wider wiring duct	BDC-125G	125	125wider wiring duct	
BDC-50G	50	50wider wiring duct	BDC-140G	140	140wider wiring duct	
BDC-55G	55	55wider wiring duct	BDC-150G	150	150wider wiring duct	

PVC Cable Ducting BRD Series




Specification

- Material: PVC
- Work Temperature: -40°C to 110°C
- Flammability Rating: UL94 V-0
- Color Option: Gray, white, blue, black and other special colors
- Certificates: UL, CE, RoHS, REACH
- Standard Length: 2M/PCS

Features

Item No.	W (mm)	Suitable wiring (mm)	Length
BDC-25T	25	25wider wiring duct	2M/pcs
BDC-40T	40	40wider wiring duct	
BDC-60T	60	60wider wiring duct	
BDC-80T	80	80wider wiring duct	
BDC-100T	100	100wider wiring duct	



DIN Rail

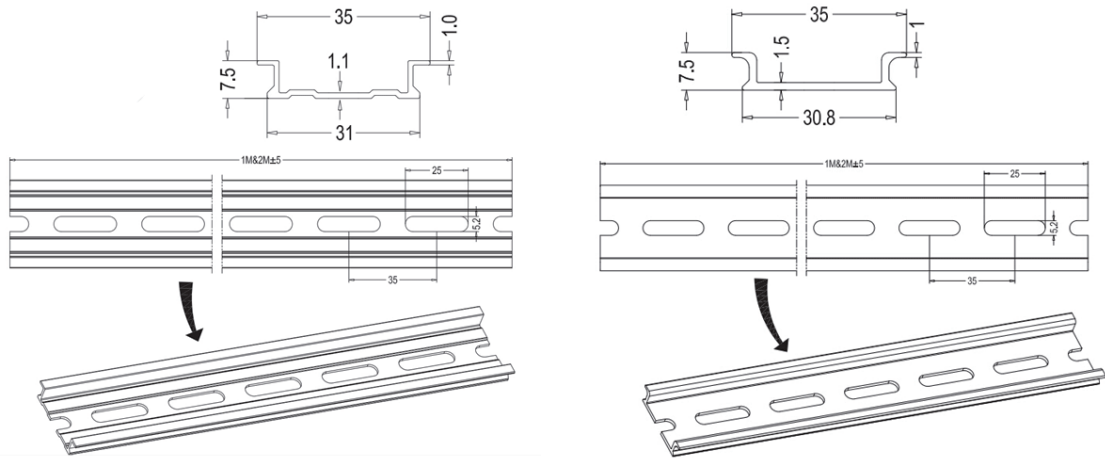

Specification


- Material: Steel with electroplate
- Color Option: Yellow plated nickel,silver plated zinc
- Certificates: CE, RoHS
- Standard Length: 2M/PCS

Features

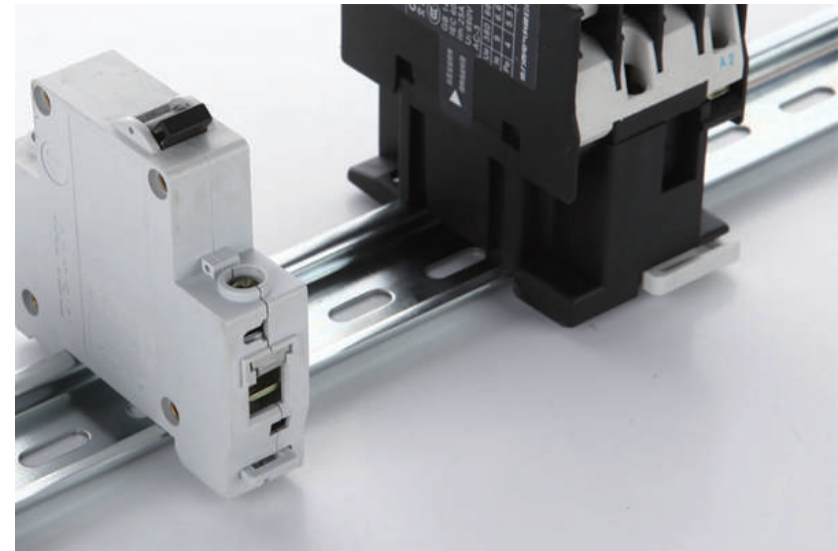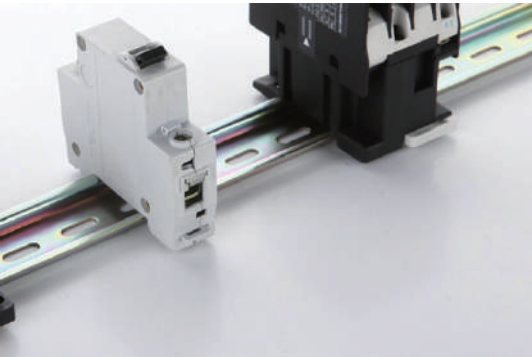


Item No.	Material	Packing/carton
Din Rails		
TS-35/7.5 Catena		
TS-35/7.5/1.0/1M-615	Colorful zinc steel	50M
TS-35/7.5/1.0/1M-515	Colorful zinc steel	50M
TS-35/7.5/1.0/1M-525	Colorful zinc steel	50M
TS-35/7.5/1.0/1M/W-615	ROHS approve steel	50M
TS-35/7.5/1.0/1M/W-515	ROHS approve steel	50M
TS-35/7.5/1.0/1M/W-525	ROHS approve steel	50M
TS-35/7.5/1.0/2M-615	Colorful zinc steel	100M
TS-35/7.5/1.0/2M-515	Colorful zinc steel	100M
TS-35/7.5/1.0/2M-525	Colorful zinc steel	100M
TS-35/7.5/1.0/2M/W-615	ROHS approve steel	100M
TS-35/7.5/1.0/2M/W-515	ROHS approve steel	100M
TS-35/7.5/1.0/2M/W-525	ROHS approve steel	100M
TS-35/7.5/1.0/1M-N	Colorful zinc without hole steel	50M
TS-35/7.5/1.0/1M/W-N	ROHS approve without hole steel	50M
TS-35/7.5/1.0/2M-N	Colorful zinc without hole steel	100M
TS-35/7.5/1.0/2M/W-N	ROHS approve without hole steel	100M
TS-35/15 Catena		
TS-35/15/1.5/1M-615	Colorful zinc steel	30M
TS-35/15/1.5/1M/W-615	ROHS approve steel	30M
TS-35/15/1.5/2M-615	Colorful zinc steel	60M
TS-35/15/1.5/2M/W-615	ROHS approve steel	60M
TS-35/15/1.5/1M-N	Colorful zinc without hole steel	30M
TS-35/15/1.5/1M/W-N	ROHS approve without hole steel	30M
TS-35/15/1.5/2M-N	Colorful zinc without hole steel	60M
TS-35/15/1.5/2M/W-N	ROHS approve without hole steel	60M
TS-15/5.5 Catena		
TS-15/5.5/1.0/1M-412	Colorful zinc steel	100M
TS-15/5.5/1.0/2M-412	Colorful zinc steel	200M
TS-15/5.5/1.0/1M/W-412	ROHS approve steel	100M
TS-15/5.5/1.0/2M/W-412	ROHS approve steel	200M
TS-15/5.5/1.0/1M-N	Colorful zinc without hole steel	100M
TS-15/5.5/1.0/2M-N	Colorful zinc without hole steel	200M
TS-15/5.5/1.0/1M/W-N	ROHS approve without hole steel	100M
TS-15/5.5/1.0/2M/W-N	ROHS approve without hole steel	200M

DIN Rail - Aluminum

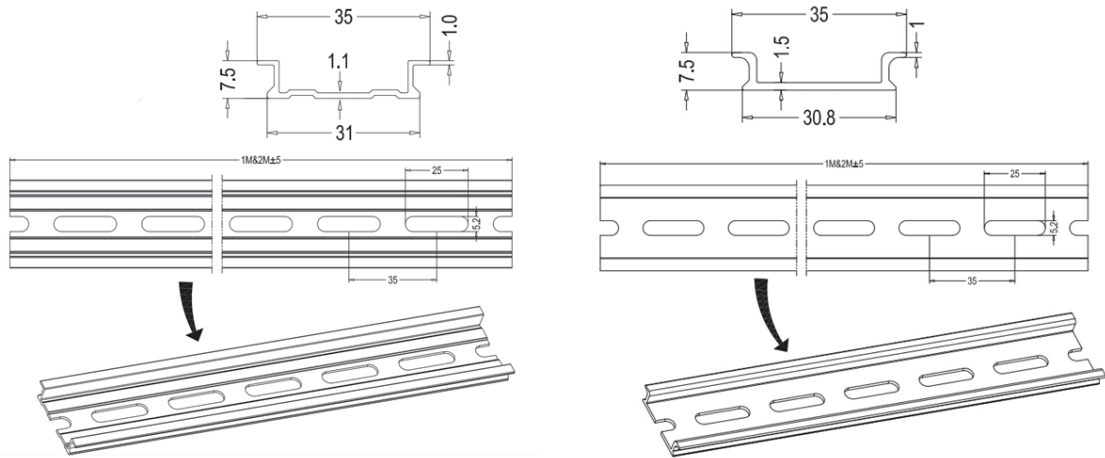


Specification

- Material: Aluminum
- Color Option: Silver, White
- Certificates: CE, RoHS
- Standard Length: 2M/PCS

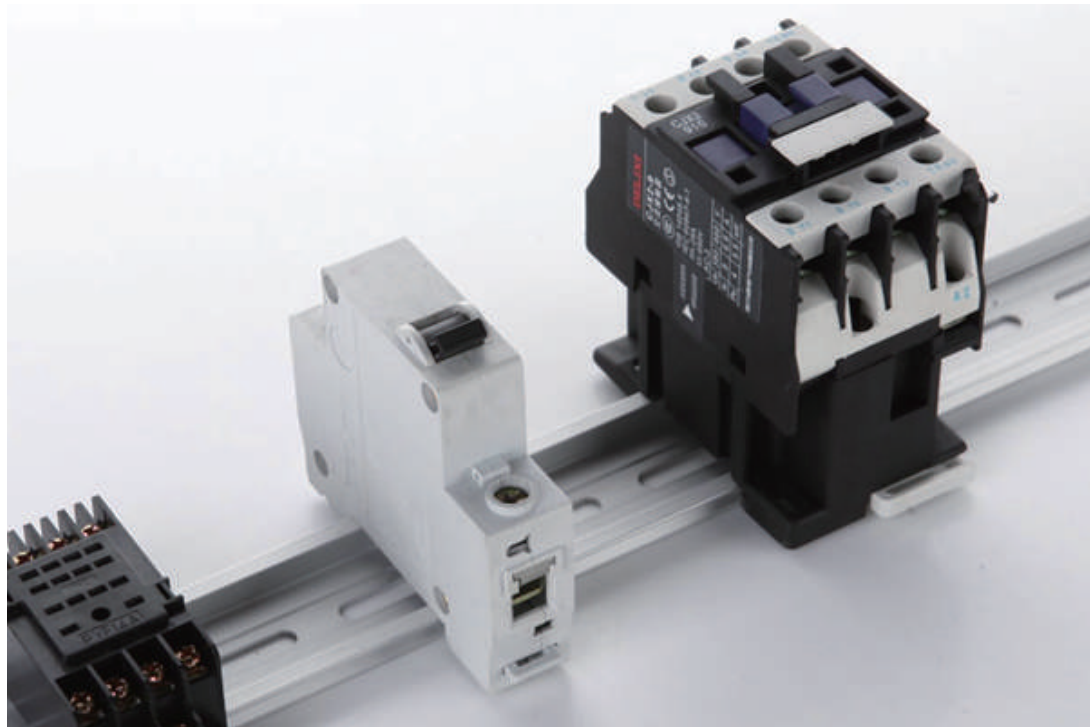

Item No. Outer width/Outer height/Thickness/Length	Material	Packing/carton
ALC-35/7.5/1.1Catena		
ALC-35/7.5/1.1/1M	Rohs approved Alu. metal	50M
ALC-35/7.5/1.1/2M	Rohs approved Alu. metal	100M
ALC-35/7.5/1.1/1M-N	Rohs approved Alu. metal -Without hole	50M
ALC-35/7.5/1.1/2M-N	Rohs approved Alu. metal -Without hole	100M
AL-35/7.5/1.5Catena		
AL-35/7.5/1.5/1M	Rohs approved Alu. metal	50M
AL-35/7.5/1.5/2M	Rohs approved Alu. metal	100M
AL-35/7.5/1.5/1M-N	Rohs approved Alu. metal -Without hole	50M
AL-35/7.5/1.5/2M-N	Rohs approved Alu. metal -Without hole	100M
AL-35/15/1.5Catena		
AL-35/15/1.5/1M	Rohs approved Alu. metal	30M
AL-35/15/1.5/2M	Rohs approved Alu. metal	60M
AL-35/15/1.5/1M-N	Rohs approved Alu. metal -Without hole	30M
AL-35/15/1.5/2M-N	Rohs approved Alu. metal -Without hole	60M

Copper Cable Lug SC Series

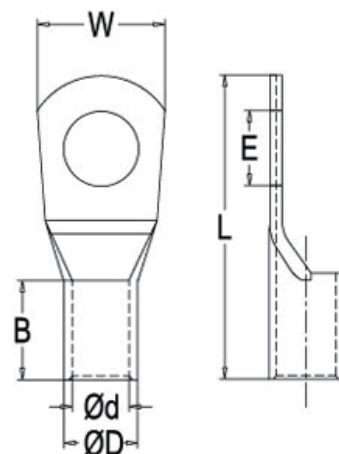

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS

Features


- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	E	Dφ	dφ	W	B	L
SC1.5-3	3.2	3.7	1.8	8	5	16
SC1.5-4	4.2	3.7	1.8	8	5	16
SC1.5-5	5.2	3.7	1.8	10	5	17
SC1.5-6	6.5	3.7	1.8	10	5	18
SC2.5-4	4.2	4	2.4	8	7	18
SC2.5-5	5.2	4	2.4	10	7	20
SC2.5-6	6.5	4	2.4	10	7	20
SC2.5-8	8.4	4	2.4	12.5	7	23
SC4-4	4.2	4.8	3.1	10	7	20
SC4-5	5.2	4.8	3.1	10	7	20
SC4-6	6.5	4.8	3.1	10	7	20
SC4-8	8.4	4.8	3.1	12.5	7	23
SC6-4	4.2	5.5	3.8	10	9	24
SC6-5	5.2	5.5	3.8	10	9	24

Item No.	E	Dφ	dφ	W	B	L
SC6-6	6.5	5.5	3.8	12	9	24
SC6-8	8.4	5.5	3.8	12.5	9	26
SC6-10	10.5	6.2	4	15	9	28
SC10-5	5.2	6.2	4.5	12	9	25
SC10-6	6.5	6.2	4.5	12	9	25
SC10-8	8.4	6.2	4.5	12.5	9	27
SC10-10	10.5	6.2	4.5	15	9	29
SC10-12	13	6.2	4.5	17	9	31
SC16-5	5.2	7.1	5.4	12	12	30
SC16-6	6.5	7.1	5.4	12	12	30
SC16-8	8.4	7.1	5.4	12.5	12	30
SC16-10	10.5	7.1	5.4	16	12	33
SC16-12	13	7.1	5.4	17	12	35
SC25-5	5.2	8.8	6.8	13	12	33
SC25-6	6.5	8.8	6.8	13	12	33
SC25-8	8.4	8.8	6.8	15	12	33
SC25-10	10.5	8.8	6.8	18	12	34
SC25-12	13	8.8	6.8	18	12	35
SC25-14	15	8.8	6.8	20	12	38
SC35-5	5.2	10.6	8.2	16	14	38
SC35-6	6.5	10.6	8.2	16	14	38
SC35-8	8.4	10.6	8.2	16	14	38
SC35-10	10.5	10.6	8.2	18	14	39
SC35-12	13	10.6	8.2	19	14	40.5
SC35-14	15	10.6	8.2	20	14	42
SC50-6	6.5	12.4	9.5	17.8	16	45
SC50-8	8.4	12.4	9.5	17.8	16	45
SC50-10	10.5	12.4	9.5	17.8	16	45
SC50-12	13	12.4	9.5	20	16	45
SC50-14	15	12.4	9.5	22	16	46
SC50-16	17	12.4	9.5	24	16	47
SC70-8	8.4	14.7	11.2	21	20	52
SC70-10	10.5	14.7	11.2	21	20	52
SC70-12	13	14.7	11.2	21	20	52
SC70-14	15	14.7	11.2	21	20	52
SC70-16	17	14.7	11.2	25	20	53
SC95-8	8.4	17.4	13.5	25	23	58
SC95-10	10.5	17.4	13.5	25	23	58
SC95-12	13	17.4	13.5	25	23	58
SC95-14	15	17.4	13.5	25	23	58
SC95-16	17	17.4	13.5	25	23	58

Copper Cable Lug T Series

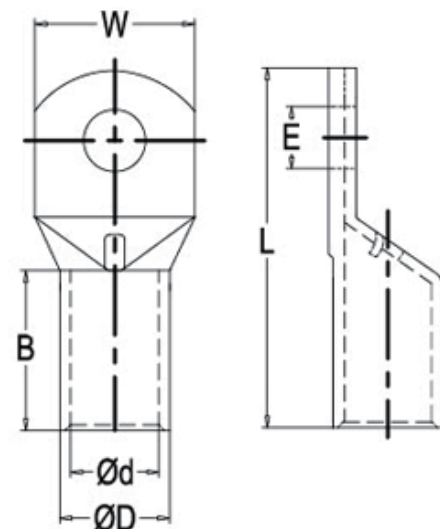

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS

Features


- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	E	Dφ	dφ	W	B	L
T1.5-4	4.3	4	2.4	8.7	7	19
T1.5-5	5.3	4	2.4	8.7	7	19
T1.5-6	6.4	4	2.4	10	7	20
T2.5-4	4.3	4.3	2.7	8.7	7	19
T2.5-5	5.3	4.3	2.7	8.7	7	19
T2.5-6	6.4	4.3	2.7	10.3	7	21
T2.5-8	8.3	4.3	2.7	12	7	23
T4-4	4.3	4.8	3.1	8.7	9.5	21.5
T4-5	5.3	4.8	3.1	8.7	9.5	21.5
T4-6	6.4	4.8	3.1	10.3	9.5	23.5
T4-8	8.3	4.8	3.1	12.5	9.5	28.5
T6-4	4.3	5.5	3.8	10.3	10	26
T6-5	5.3	5.5	3.8	10.3	10	26
T6-6	6.4	5.5	3.8	10.3	10	26

Item No.	E	Dφ	dφ	W	B	L
T6-8	8.3	5.5	3.8	13.9	10	29
T6-10	10.5	5.5	3.8	13.9	10	29
T10-4	4.3	6.9	4.7	11.9	11.5	27.5
T10-5	5.3	6.9	4.7	11.9	11.5	27.5
T10-6	6.4	6.9	4.7	11.9	11.5	27.5
T10-8	8.3	6.9	4.7	13.5	11.5	30.5
T10-10	10.5	6.9	4.7	15	11.5	30.5
T10-12	13.2	6.9	4.7	17	11.5	34
T16-5	5.3	7.8	5.6	12	12	27.5
T16-6	6.4	7.8	5.6	12	12	27.5
T16-8	8.3	7.8	5.6	13.5	12	31
T16-10	10.5	7.8	5.6	16	12	32
T16-12	13.2	7.8	5.6	17	12	37.5
T25-6	6.4	9.5	7.1	14	13.5	34
T25-8	8.3	9.5	7.1	14	13.5	34
T25-10	10.5	9.5	7.1	16	13.5	37
T25-12	13.2	9.5	7.1	18	13.5	40
T35-6	6.4	11	8.2	16.5	16	39
T35-8	8.3	11	8.2	16.5	16	39
T35-10	10.5	11	8.2	16.5	16	43
T35-12	13.2	11	8.2	18	16	43
T35-14	14.5	11	8.2	20	16	48
T35-16	16.5	11	8.2	23	16	48
T40-6	6.4	11.2	9	17	17	44
T40-8	8.3	11.2	9	17	17	44
T40-10	10.5	11.2	9	17	17	44
T40-12	13.2	11.2	9	18	17	44
T50-6	6.4	12.5	9.5	18	20	45
T50-8	8.3	12.5	9.5	18	20	45
T50-10	10.5	12.5	9.5	18	20	49
T50-12	13.2	12.5	9.5	18	20	49
T50-14	14.5	12.5	9.5	22	20	54
T50-16	16.5	14	9.5	25	23	62
T50-20	21	14	9.5	30	23	68
T70-8	8.3	15	11.5	22	20	47.6
T70-10	10.5	15	11.5	22	20	51.6
T70-12	13.2	15	11.5	22	20	51.6
T70-14	14.5	15	11.5	22	20	62.6
T70-16	16.5	15	11.5	22	20	62.6
T70-20	21	15	11.5	30	20	62.6
T95-8	8.3	17	13.5	25	22	55.8
T95-10	10.5	17	13.5	25	22	55.8
T95-12	13.2	17	13.5	25	22	55.8

Copper Cable Lug DT Series

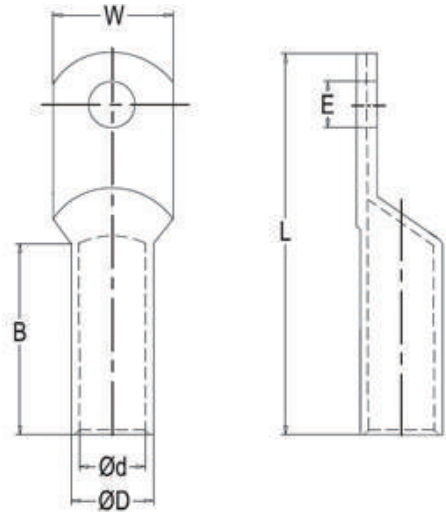

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS


Features

- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	E	Dφ	dφ	W	B	L
DT1.5-5	5.2	4	2.2	8	10	23
DT2.5-4	4.2	4.5	2.9	8	13	27
DT2.5-5	5.2	4.5	2.9	8	13	27
DT2.5-6	6.4	4.5	2.9	10	13	27
DT4-5	5.2	5.2	3.6	10	13	28
DT4-6	6.4	5.2	3.6	10	13	28
DT6-5	5.2	6	4.2	10	17	35
DT6-6	6.4	6	4.2	10	17	35
DT6-8	8.4	6	4.2	12	17	35
DT10-6	6.4	7	5	12.4	17	36
DT10-8	8.4	7	5	12.4	17	36
DT16-6	6.4	9	6	14	32	58
DT16-8	8.4	9	6	14	32	58
DT25-6	6.4	10	7	15	32	58
DT25-8	8.4	10	7	15	32	58
DT25-10	10.5	10	7	17.5	32	58
DT35-6	6.4	12	9	17.1	36	62
DT35-8	8.4	12	9	17.1	36	62
DT35-10	10.5	12	9	18	36	62
DT50-8	8.4	14	10	20	40	72
DT50-10	10.5	14	10	20	40	72
DT70-8	8.4	16	12	23	42	76
DT70-10	10.5	16	12	23	42	76
DT70-12	13	16	12	23	42	76
DT95-10	10.5	18	14	26	44	84
DT95-12	13	18	14	26	44	84
DT120-12	13	21	16	30	46	90
DT120-16	17	21	16	30	46	90
DT150-12	13	23	17	33	50	98
DT150-16	17	23	17	33	50	98
DT185-12	13	25	19	36	52	101
DT185-16	17	25	19	36	52	101
DT240-12	13	28	21.6	40	52	110
DT240-16	17	28	21.6	40	52	112
DT240-20	21	28	21.6	40	52	112
DT300-16	17	31	24	45	58	116
DT300-20	21	31	24	45	58	120
DT400-16	17	36.5	28.5	52	66	126
DT400-20	21	36.5	28.5	52	66	131
DT500-16	17	39	30.5	56	70	141
DT500-20	21	39	30.5	56	70	146
DT630-20	21	45	35.5	65	80	168

Copper Cable Lug SG Series

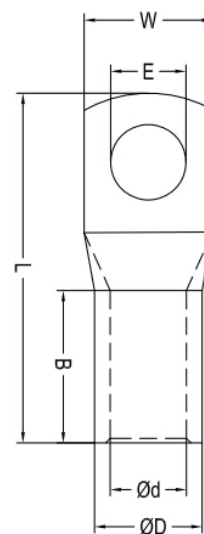

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS


Features

- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	E	Dφ	dφ	W	B	L
SG35-6	6.5	12	8.5	15	17	39
SG35-8	8.5	12	8.5	15	17	39
SG50-6	6.5	14	10	15	19	47
SG50-8	8.5	14	10	17	19	47
SG50-10	10.5	14	10	19	19	50
SG70-6	6.5	16.5	12	17	21	53
SG70-8	8.5	16.5	12	17	21	53
SG70-10	10.5	16.5	12	19	21	55
SG70-12	13	16.5	12	19	21	59
SG95-6	6.5	18	13.5	19	25	59
SG95-8	8.5	18	13.5	19	25	59
SG95-10	10.5	18	13.5	19	25	59
SG95-12	13	18	13.5	19	25	62
SG120-6	6.5	19.5	15	20.8	26	62
SG120-8	8.5	19.5	15	20.8	26	62
SG120-10	10.5	19.5	15	20.8	26	62
SG120-12	13	19.5	15	20.8	26	62
SG150-6	6.5	21	16.5	20.8	30	67
SG150-8	8.5	21	16.5	20.8	30	67
SG150-10	10.5	21	16.5	20.8	30	67
SG150-12	13	21	16.5	20.8	30	72
SG185-10	10.5	24	19	24.5	30	76
SG185-12	13	24	19	31	30	83
SG185-16	17	24	19	31	30	83
SG240-10	10.5	26	21	31	35	83
SG240-12	13	26	21	31	35	93
SG240-14	15	26	21	31	35	93
SG240-16	17	26	21	31	35	93
SG300-10	10.5	30	23.5	31	44	98
SG300-12	13	30	23.5	31	44	98
SG300-14	15	30	23.5	31	44	98
SG300-16	17	30	23.5	31	44	98

Copper Cable Lug LYF Series

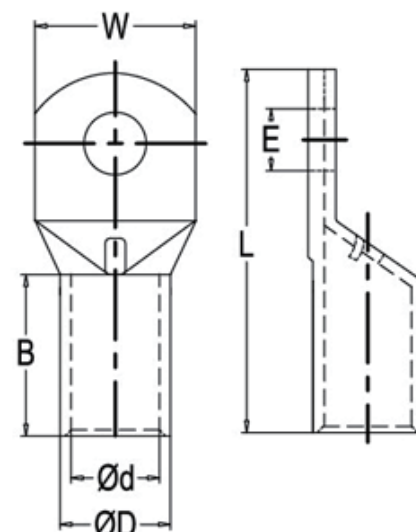

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS

Features


- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	E	Dφ	dφ	W	B	L
LYF10-5	5.3	8	5	11.5	9	28
LYF10-6	6.5	8	5	11.5	9	28
LYF10-8	8.4	8	5	13.5	9	32
LYF10-10	10.5	8	5	16	9	34
LYF16-6	6.5	9	6	13	10	33
LYF16-8	8.4	9	6	13	10	33
LYF16-10	10.5	9	6	16	10	38
LYF16-12	13	9	6	22	10	47
LYF25-6	6.5	11	8	16	11	37
LYF25-8	8.4	11	8	16	11	38
LYF25-10	10.5	11	8	17	11	42
LYF25-12	13	11	8	22	11	47
LYF35-6	6.5	13	9	18	14	44
LYF35-8	8.4	13	9	18	14	44

Item No.	E	Dφ	dφ	W	B	L
LYF35-10	10.5	13	9	18	14	44
LYF35-12	13	13	9	22	14	52
LYF50-6	6.5	14.5	11	21	17	50
LYF50-8	8.4	14.5	11	21	17	50
LYF50-10	10.5	14.5	11	21	17	50
LYF50-12	13	14.5	11	21	17	53
LYF70-6	6.5	17	13	25	20	55
LYF70-8	8.4	17	13	25	20	55
LYF70-10	10.5	17	13	25	20	55
LYF70-12	13	17	13	25	20	58
LYF70-16	17	17	13	28	20	64
LYF95-8	8.4	20	15	29	23	69
LYF95-10	10.5	20	15	29	23	69
LYF95-12	13	20	15	29	23	69
LYF95-16	17	20	15	29	23	69
LYF120-10	10.5	22	17	32	25	73
LYF120-12	13	22	17	32	25	73
LYF120-16	17	22	17	32	25	73
LYF150-10	10.5	25	19	36	30	80
LYF150-12	13	25	19	36	30	80
LYF150-16	17	25	19	36	30	80
LYF150-20	21	25	19	36	30	87
LYF185-10	10.5	27	21	39	35	86
LYF185-12	13	27	21	39	35	86
LYF185-16	17	27	21	39	35	86
LYF185-20	21	27	21	39	35	93
LYF240-10	10.5	30	24	44	35	95
LYF240-12	13	30	24	44	35	95
LYF240-16	17	30	24	44	35	95
LYF240-20	21	30	24	44	35	95
LYF300-10	10.5	32	26	47	42	114
LYF300-12	13	32	26	47	42	114
LYF300-16	17	32	26	47	42	114
LYF300-20	21	32	26	47	42	114
LYF300-24	26	32	26	47	42	114
LYF400-12	13	36	30	54	48	126
LYF400-16	17	36	30	54	48	126
LYF400-20	21	36	30	54	48	126
LYF400-24	26	36	30	54	48	126
LYF500-20	21	42	33	61	47	134
LYF500-24	26	42	33	61	47	134
LYF630-16	17	53	39	75	68	180

Copper Cable Lug LYF45 Series

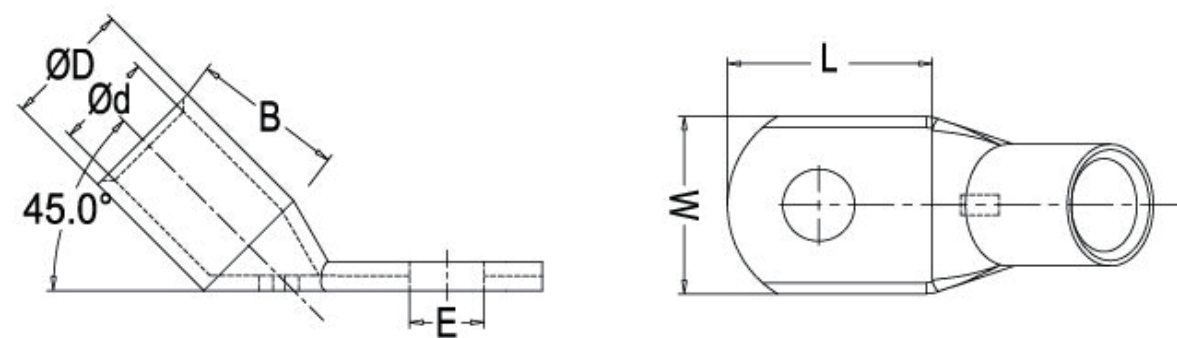

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS

Features


- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	DIMENSION					
	E	DΦ	dΦ	W	B	L1
LYF45-10/6	6.5	8	5	13	19	18
LYF45-10/8	8.4	8	5	13.5	19	20.5
LYF45-16/6	6.5	9	6	13	23	18
LYF45-16/8	8.4	9	6	13.5	23	20.5
LYF45-25/6	6.5	11	8	17	24	18
LYF45-25/8	8.4	11	8	17	24	20.5
LYF45-25/10	10.5	11	8	17	24	25
LYF45-35/6	6.5	13	9	18	30	18
LYF45-35/8	8.4	13	9	18	30	20.5
LYF45-35/10	10.5	13	9	18	30	25
LYF45-50/8	8.4	14.5	11	21	31	26
LYF45-50/10	10.5	14.5	11	21	31	30
LYF45-50/12	13	14.5	11	21	31	32
LYF45-70/8	8.4	17	13	25	35	26
LYF45-70/10	10.5	17	13	25	35	30
LYF45-70/12	13	17	13	25	35	32
LYF45-95/10	10.5	20	15	29	40	30
LYF45-95/12	13	20	15	29	40	32
LYF45-95/16	17	20	15	29	40	36
LYF45-120/10	10.5	22	17	32	43	30
LYF45-120/12	13	22	17	32	43	32
LYF45-120/16	17	22	17	32	43	36



Copper Cable Lug LYF90 Series

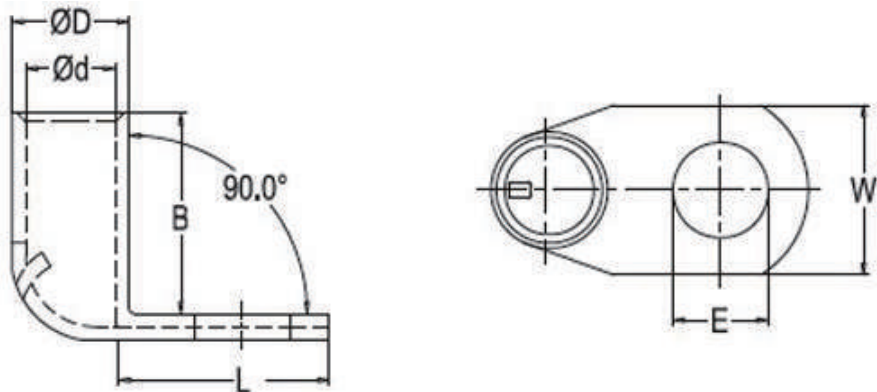

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS

Features


- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	DIMENSION					
	E	DΦ	dΦ	W	B	L1
LYF90-10/6	6.5	8	5	13	15	18
LYF90-10/8	8.4	8	5	13.5	15	20.5
LYF90-16/6	6.5	9	6	13	17	18
LYF90-16/8	8.4	9	6	13.5	17	20.5
LYF90-25/6	6.5	11	8	17	18.5	18
LYF90-25/8	8.4	11	8	17	18.5	20.5
LYF90-25/10	10.5	11	8	17	18.5	25
LYF90-35/6	6.5	13	9	18	22.5	18
LYF90-35/8	8.4	12	8.5	17	22.5	20.5
LYF90-35/10	10.5	13	9	18	22.5	25
LYF90-50/6	6.5	14.5	11	21	30.5	26
LYF90-50/8	8.4	14.5	11	21	30.5	26
LYF90-50/10	10.5	14.5	11	21	30.5	30
LYF90-50/12	13	14.5	11	21	30.5	32
LYF90-70/6	6.5	17	13	25	31.5	26
LYF90-70/8	8.4	16.5	12	24	31.5	26
LYF90-70/10	10.5	17	13	25	31.5	30
LYF90-70/12	13	17	13	25	31.5	32
LYF90-95/8	8.4	20	15	29	32.5	26
LYF90-95/10	10.5	20	15	29	32.5	30
LYF90-95/12	13	20	15	29	32.5	32
LYF90-95/16	17	20	15	29	32.5	36
LYF90-120/10	10.5	22	17	32	34.5	30
LYF90-120/12	13	22	17	32	34.5	32
LYF90-120/16	17	22	17	32	34.5	36



Copper Cable Lug GC45 Series

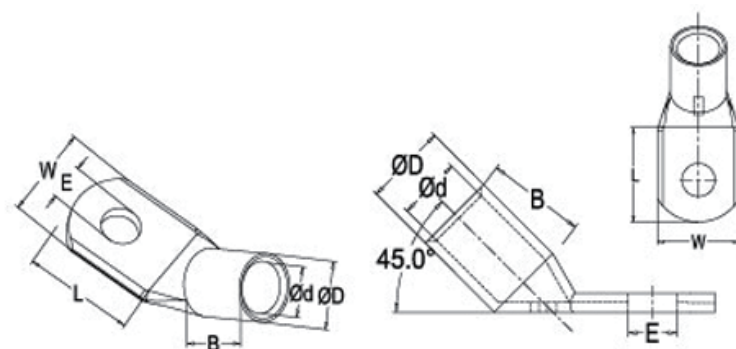

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS


Features

- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	E	Dφ	dφ	W	B	L
GC45-10/6	6.4	6.9	4.7	11.9	10	12.5
GC45-10/8	8.3	6.9	4.7	13.5	10	15.5
GC45-16/6	6.4	7.8	5.6	11.9	11	12
GC45-16/8	8.3	7.8	5.6	13.5	11	15.5
GC45-25/8	8.3	9.5	7.1	14	13	16
GC45-25/10	10.5	9.5	7.1	16	13	19
GC45-35/8	8.3	11	8.2	16.5	16	18
GC45-35/10	10.5	11	8.2	16.5	16	22
GC45-50/10	10.5	12.5	9.5	17.9	19	22
GC45-50/12	13	12.5	9.5	17.9	19	22
GC45-70/10	10.5	15	11.5	21.5	21	22
GC45-70/12	13	15	11.5	21.5	21	22
GC45-95/14	14.5	17	13.5	24.7	24	33
GC45-95/16	16.5	17	13.5	24.7	24	33
GC45-120/14	14.5	20	15.6	28.9	27	33

Copper Cable Lug GC90 Series

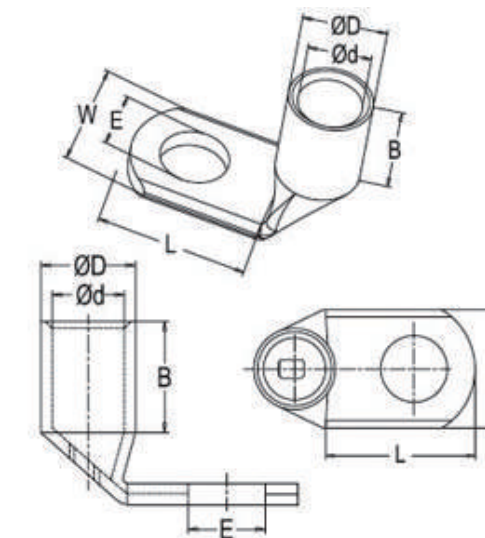

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS


Features

- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	E	Dφ	dφ	W	B	L
GC90-10/6	6.4	6.9	4.7	11.9	10.5	12.5
GC90-10/8	8.3	6.9	4.7	13.5	10.5	15.5
GC90-16/6	6.4	7.8	5.6	11.9	11	12
GC90-16/8	8.6	7.8	5.6	13.5	11	15.5
GC90-25/8	8.3	9.5	7.1	14	13	16
GC90-25/10	10.5	9.5	7.1	16	13	19
GC90-35/8	8.3	11	8.2	16.5	16	18
GC90-35/10	10.5	11	8.2	16.5	16	22
GC90-50/10	10.5	12.5	9.5	17.9	19	22
GC90-50/12	13	12.5	9.5	17.9	19	22
GC90-70/10	10.5	15	11.5	21.5	21	22
GC90-70/12	13	15	11.5	21.5	21	22
GC90-95/14	14.5	17	13.5	24.7	24	33
GC90-95/16	16.5	17	13.5	24.7	24	33
GC90-120/14	14.5	20	15.6	28.9	27	33

Copper Cable Lug Bell-Mouth FC Series

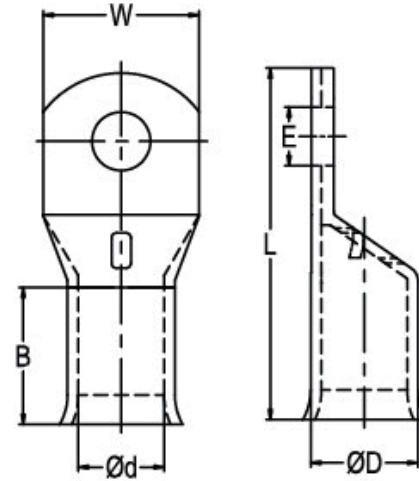

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS

Features


- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	E	Dφ	dφ	W	B	L
FC10-5	5.3	6.8	4.3	12	12	30.5
FC10-6	6.5	6.8	4.3	12	12	30.5
FC10-8	8.5	6.8	4.3	15	12	37
FC10-10	10.5	6.8	4.3	16	12	41
FC10-12	13	6.8	4.3	19	12	44
FC16-5	5.3	8	5.3	12	14	33.3
FC16-6	6.5	8	5.3	12	14	33.3
FC16-8	8.5	8	5.3	16	14	37.5
FC16-10	10.5	8	5.3	16	14	41.5
FC16-12	13	8	5.3	19	14	44
FC25-5	5.3	9.5	6.6	13	15	36.3
FC25-6	6.5	9.5	6.6	13	15	36.3
FC25-8	8.5	9.5	6.6	18	15	42
FC25-10	10.5	9.5	6.6	18	15	46

Item No.	E	Dφ	dφ	W	B	L
FC25-12	13	9.5	6.6	18	15	48
FC25-14	15	9.5	6.6	20	15	52.5
FC35-5	5.3	11	7.9	15	17	39.5
FC35-6	6.5	11	7.9	15	17	39.5
FC35-8	8.5	11	7.9	17	17	44
FC35-10	10.5	11	7.9	17	17	49
FC35-12	13	11	7.9	19	17	51
FC35-14	15	11	7.9	21	17	53.5
FC50-6	6.5	12.5	9.2	18	19	42.5
FC50-8	8.5	12.5	9.2	18	19	47
FC50-10	10.5	12.5	9.2	18	19	52
FC50-12	13	12.5	9.2	19	19	54
FC50-14	15	12.5	9.2	21	19	57.5
FC50-16	17	12.5	9.2	26	19	61
FC70-6	6.5	15	11	21	21	51
FC70-8	8.5	15	11	21	21	51
FC70-10	10.5	15	11	21	21	55
FC70-12	13	15	11	22	21	59
FC70-14	15	15	11	23	21	62.5
FC70-16	17	15	11	28	21	66
FC70-20	21	15	11	30	21	72
FC95-8	8.5	17	13.1	25	25	56
FC95-10	10.5	17	13.1	25	25	60
FC95-12	13	17	13.1	25	25	62
FC95-14	15	17	13.1	25	25	66.5
FC95-16	17	17	13.1	25	25	70
FC95-20	21	17	13.1	30	25	76
FC120-8	8.5	19	14.5	28	26	64
FC120-10	10.5	19	14.5	28	26	64
FC120-12	13	19	14.5	28	26	66
FC120-14	15	19	14.5	28	26	69.5
FC120-16	17	19	14.5	28	26	72
FC150-10	10.5	21	16.2	30	30	71
FC150-12	13	21	16.2	30	30	73
FC150-14	15	21	16.2	30	30	73
FC150-16	17	21	16.2	30	30	75
FC185-12	13	23	18	33.5	32	81
FC185-14	15	23	18	33.5	32	85
FC185-16	17	23	18	33.5	32	87
FC185-20	21	23	18	33.5	32	91
FC240-10	10.5	26	20.6	38	35	93.5

Copper Cable Lug Bell-Mouth TT Series

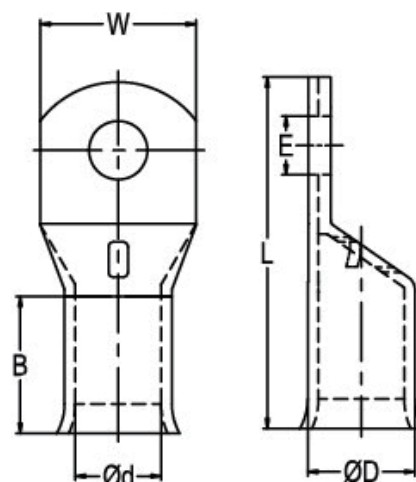

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS

Features


- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	E	Dφ	dφ	W	B	L
TT10-6	6.4	6.9	4.7	11.9	12	28
TT10-8	8.3	6.9	4.7	13.5	12	31
TT16-6	6.4	7.8	5.6	11.9	17	33
TT16-8	8.3	7.8	5.6	13.5	17	37
TT16-10	10.5	7.8	5.6	16	17	38
TT25-8	8.3	9.5	7.1	14	18	39
TT25-10	10.5	9.5	7.1	16	18	42
TT35-8	8.3	11	8.2	16.5	19	42
TT35-10	10.5	11	8.2	16.5	19	46
TT50-10	10.5	12.5	9.5	17.9	22	51
TT50-12	13	12.5	9.5	17.9	22	51
TT70-10	10.5	15	11.5	22	22	54
TT70-12	13	15	11.5	22	22	54
TT95-14	14.5	17	13.5	24.7	27	72

Item No.	E	Dφ	dφ	W	B	L
TT95-16	16.5	17	13.5	24.7	27	72
TT120-14	14.5	20	15.6	28.9	29	74
TT120-16	16.5	20	15.6	28.9	29	74
TT150-14	14.5	21	16.5	30.4	28	84
TT150-16	16.5	21	16.5	30.4	28	84
TT185-16	16.5	23.6	18.4	34	42	92
TT240-16	16.5	26.4	21.2	41	45	98
S-TT-6/4	4.3	5.5	3.8	10.3	11	25
S-TT-6/5	5.3	5.5	3.8	10.3	11	25
S-TT-6/6	6.4	5.5	3.8	10.3	11	26
S-TT-6/8	8.3	5.5	3.8	14	11	29
S-TT-10/4	4.3	6.8	4.7	11.9	11.5	26.5
S-TT-10/5	5.3	6.8	4.7	11.9	11.5	27
S-TT-10/6	6.4	6.8	4.7	11.9	11.5	28.5
S-TT-10/8	8.3	6.8	4.7	15	11.5	31.5
S-TT-10/1	10.5	6.8	4.7	18	11.5	35.5
S-TT-16/5	5.3	7.8	5.6	11.9	16.5	32
S-TT-16/6	6.4	7.8	5.6	11.9	16.5	34
S-TT-16/8	8.3	7.8	5.6	15	16.5	36.5
S-TT-16/1	10.5	7.8	5.6	18	16.5	40
S-TT-25/6	6.4	9.4	7.1	13.5	18	36
S-TT-25/8	8.3	9.4	7.1	15	18	39
S-TT-25/1	10.5	9.4	7.1	18	18	44
S-TT-25/1	13	9.4	7.1	21	18	46
S-TT-35/6	6.4	11.3	8.7	16	19	37
S-TT-35/8	8.3	11.3	8.7	16	16	38
S-TT-35/1	10.5	11.3	8.7	19	19	45
S-TT-35/1	13	11.3	8.7	21	19	47
S-TT-50/6	6.4	12.6	9.8	17.9	22	44
S-TT-50/8	8.3	12.6	9.8	17.9	22	46
S-TT-50/1	10.5	12.6	9.8	20	22	50
S-TT-50/1	13	12.6	9.8	21	22	54
S-TT-70/8	8.3	14.7	11.5	21.5	23	49
S-TT-70/1	10.5	14.7	11.5	21.5	25	55
S-TT-70/1	13	14.7	11.5	21.5	23	55
S-TT-95/8	8.3	16.9	13.5	24.7	30	58
S-TT-95/1	10.5	16.9	13.5	24.7	30	61
S-TT-95/1	13	16.9	13.5	24.7	30	63
S-TT-95/1	14.5	16.9	13.5	24.7	30	67
S-TT-95/1	16.5	16.9	13.5	27	30	70
S-TT-120/	10.5	19.9	15.6	28.9	30.5	62

Copper Cable Lug DIN Series

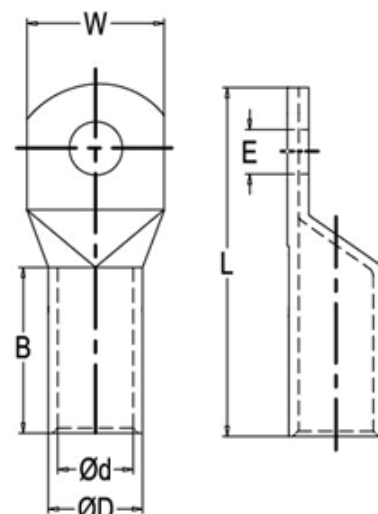

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS

Features


- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	E	Dφ	dφ	W	B	L
DIN6-5	5.3	5.5	3.8	8.5	10	30.5
DIN6-6	6.4	5.5	3.8	8.5	10	31.5
DIN6-8	8.4	5.5	3.8	13	10	34
DIN10-5	5.3	6	4.5	9	10	34
DIN10-6	6.4	6	4.5	9	10	34.5
DIN10-8	8.4	6	4.5	13	10	37
DIN10-10	10.5	6	4.5	15	10	39
DIN16-6	6.4	8.5	5.5	13	20	43.5
DIN16-8	8.4	8.5	5.5	13	20	46
DIN16-10	10.5	8.5	5.5	17	20	48
DIN16-12	13	8.5	5.5	18	20	49
DIN25-6	6.4	10	7	14	20	45.5
DIN25-8	8.4	10	7	16	20	48
DIN25-10	10.5	10	7	17	20	50

Item No.	E	Dφ	dφ	W	B	L
DIN25-12	13	10	7	19	20	51
DIN35-6	6.4	12.5	8.2	17	20	49.5
DIN35-8	8.4	12.5	8.2	17	20	52
DIN35-10	10.5	12.5	8.2	19	20	54
DIN35-12	13	12.5	8.2	21	20	55
DIN35-14	15	12.5	8.2	21	20	56.5
DIN50-8	8.4	14.5	10	20	28	62
DIN50-10	10.5	14.5	10	22	28	64
DIN50-12	13	14.5	10	24	28	65
DIN50-14	15	14.5	10	24	28	66.5
DIN50-16	17	14.5	10	28	28	68
DIN70-8	8.4	16.5	11.5	24	28	65
DIN70-10	10.5	16.5	11.5	24	28	67
DIN70-12	13	16.5	11.5	24	28	68
DIN70-14	15	16.5	11.5	24	28	69.5
DIN70-16	17	16.5	11.5	30	28	71
DIN95-8	8.4	19	13.5	28	35	77
DIN95-10	10.5	19	13.5	28	35	77
DIN95-12	13	19	13.5	28	35	78
DIN95-14	15	19	13.5	28	35	79.5
DIN95-16	17	19	13.5	32	35	81
DIN120-10	10.5	21	15.5	32	35	85
DIN120-12	13	21	15.5	32	35	86
DIN120-14	15	21	15.5	32	35	88
DIN120-16	17	21	15.5	32	35	89
DIN120-20	21	21	15.5	38	35	91
DIN150-10	10.5	23.5	17	34	35	93
DIN150-12	13	23.5	17	34	35	94
DIN150-14	15	23.5	17	34	35	97
DIN150-16	17	23.5	17	34	35	97
DIN150-20	21	23.5	17	40	35	99
DIN185-10	10.5	25.5	19	37	40	97
DIN185-12	13	25.5	19	37	40	98
DIN185-14	15	25.5	19	37	40	101
DIN185-16	17	25.5	19	37	40	101
DIN185-20	21	25.5	19	40	40	103
DIN240-12	13	29	21.5	42	40	108
DIN240-14	15	29	21.5	42	40	111
DIN240-16	17	29	21.5	42	40	111
DIN240-20	21	29	21.5	45	40	113
DIN300-12	13	32	24.5	46	50	119

Copper Cable Lug AD Series

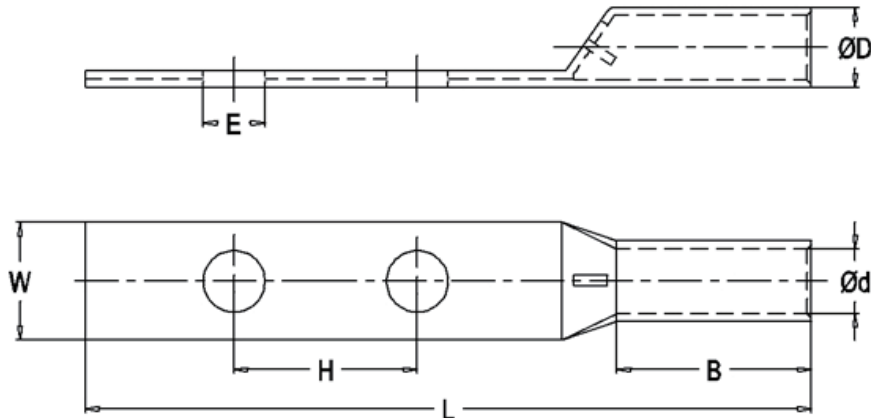

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS


Features

- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	E	Dφ	dφ	W	B	L	H
AD38-8	9	11.7	9.5	17.5	12.5	65.8	25.4
AD60-10	11	14.4	11.9	21.3	14.5	74.7	25.4
AD80-10	11	17.9	14.9	26.7	19.5	82.3	25.4
AD100-10	11	20.1	16.8	29.7	19.5	86.6	25.4
AD125-10	11	21.3	17.8	32	19.5	89.7	25.4
AD150-10	11	23.4	19.6	35	22.8	94.5	25.4
AD185-12	14	25.3	21.1	37.8	23.8	117	44.5
AD200-12	14	27	22.5	40.4	24.8	119.6	44.5
AD250-12	14	30.2	25.2	45.2	26.8	120.7	44.5
AD325-12	14	33.1	27.6	49.2	36	130.2	44.5
AD400-12	14	38.2	31.8	56.9	40	136.8	44.5
AD500-12	14	42.7	35.6	63.5	43	147.5	44.5

Copper Cable Lug CP Series

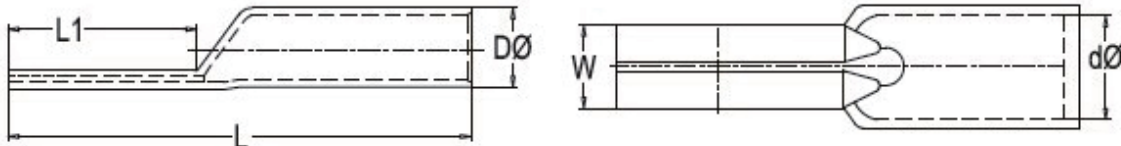

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS


Features

- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	Dφ	dφ	W	L	L1
CP-10	6.8	4.7	5	25	12
CP-16	7.8	5.6	6	31	15
CP-25	9.4	7.1	7	34	18
CP-35	11.3	8.7	9	42	18
CP-50	12.6	9.8	10	46	21

Copper Cable Lug TPE Series

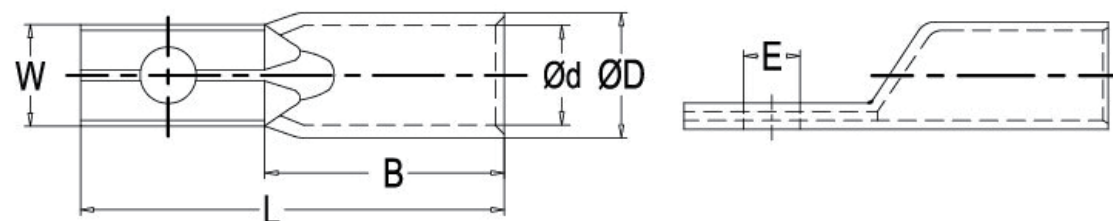

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS


Features

- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	E	Dφ	dφ	W	B	L
TPE50-8	8.5	12.6	9.8	15	22	50
TPE50-10	10.5	12.6	9.8	15	22	50
TPE70-8	8.5	14.7	11.5	15	24	55
TPE70-10	10.5	14.7	11.5	15	24	55
TPE95-8	8.5	16.9	13.5	15	27	60
TPE95-10	10.5	16.9	13.5	15	27	60
TPE120-8	8.5	19.9	15.6	21	31	65
TPE120-10	10.5	19.9	15.6	21	31	65
TPE150-10	10.5	20.9	16.5	21	33	72
TPE150-12	12.5	20.9	16.5	21	33	72
TPE185-10	10.5	23.7	18.8	26	35	75
TPE185-12	12.5	23.7	18.8	26	35	75
TPE240-10	10.5	26.2	21.2	26	42	85
TPE240-12	12.5	26.2	21.2	26	42	85

Copper Cable Lug HP Series

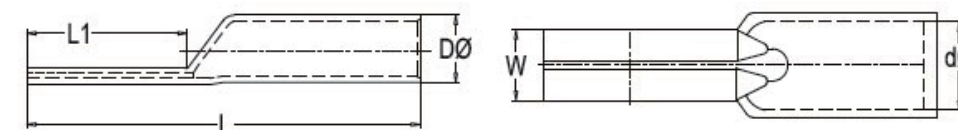

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS


Features

- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	E	Dφ	dφ	W	B	L
HP1.5-4	4.3	3.3	1.8	6.5	6	17.5
HP1.5-5	5.3	3.3	1.8	9	6	19
HP1.5-6	6.4	3.3	1.8	9	6	22.5
HP2.5-4	4.3	4.2	2.2	7.5	6	17.1
HP2.5-5	5.3	4.2	2.2	8.5	6	19.2
HP2.5-6	6.4	4.2	2.2	9.5	6	22.8
HP2.5-8	8.4	4.2	2.2	13	6	28
HP4-4	4.3	5	3	8.5	8	21.8
HP4-5	5.3	5	3	9	8	22.2
HP4-6	6.4	5	3	10	8	22.2
HP6-5	5.3	6.5	3.5	10	11	28.2
HP6-6	6.4	6.5	3.5	12	11	29.1
HP6-8	8.4	6.5	3.5	15	11	31.8
HP6-10	10.5	6.5	3.5	17	11	37

Copper Cable Lug TU Series

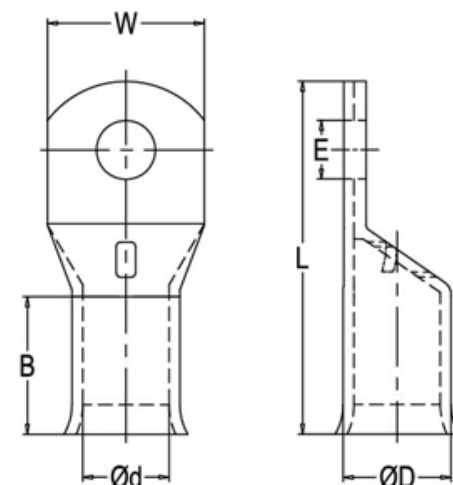

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS

Features


- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	E	Dφ	dφ	W	B	L
TU10-5	5.3	6.9	4.4	10.5	9	27
TU10-6	6.4	6.9	4.4	10.5	9	27
TU10-8	8.4	6.9	4.4	14	10	35
TU10-10	10.4	6.9	4.4	16	10	39
TU10-12	12.8	6.9	4.4	18	10	39
TU16-5	5.3	8	5.6	11	11	29.5
TU16-6	6.4	8	5.6	11	11	29.5
TU16-8	8.4	8	5.6	14	11	38
TU16-10	10.4	8	5.6	16	11	42
TU16-12	12.8	8	5.6	18	11	42
TU25-5	5.3	9.5	7	13.5	13	40
TU25-6	6.4	9.5	7	13.5	13	40
TU25-8	8.4	9.5	7	13.5	13	40
TU25-10	10.4	9.5	7	16	13	44

Item No.	E	Dφ	dφ	W	B	L
TU25-12	12.8	9.5	7	18	13	44
TU35-5	5.3	11	8.2	15.5	14	41
TU35-6	6.4	11	8.2	15.5	14	41
TU35-8	8.4	11	8.2	15.5	14	41
TU35-10	10.4	11	8.2	15.5	14	45
TU35-12	12.8	11	8.2	18	14	45
TU35-14	14.5	11	8.2	20	14	50
TU50-5	5.3	12.1	9.5	17.2	18	46
TU50-6	6.4	12.1	9.5	17.2	18	46
TU50-8	8.4	12.1	9.5	17.2	18	46
TU50-10	10.4	12.1	9.5	17.2	18	50
TU50-12	12.8	12.1	9.5	17.2	18	50
TU50-14	14.5	12.1	9.5	20	18	55
TU50-16	16.5	12.1	9.5	22	18	55
TU70-5	5.3	15	11.5	21.2	18	48
TU70-6	6.4	15	11.5	21.2	18	48
TU70-8	8.4	15	11.5	21.2	18	48
TU70-10	10.4	15	11.5	21.2	18	52
TU70-12	12.8	15	11.5	21.2	18	52
TU70-14	14.5	15	11.5	21.2	18	63
TU70-16	16.5	15	11.5	21.2	18	63
TU95-8	8.4	17	13.5	24.3	24	58
TU95-10	10.4	17	13.5	24.3	24	58
TU95-12	12.8	17	13.5	24.3	24	58
TU95-14	14.5	17	13.5	24.3	24	69
TU95-16	16.5	17	13.5	24.3	24	69
TU120-8	8.4	19	15	27.2	27	73
TU120-10	10.4	19	15	27.2	27	73
TU120-12	12.8	19	15	27.2	27	73
TU120-14	14.5	19	15	27.2	27	73
TU120-16	16.5	19	15	27.2	27	73
TU120-20	21	19	15	27.2	27	73
TU150-8	8.4	21	16.5	30	27	78
TU150-10	10.4	21	16.5	30	27	78
TU150-12	12.8	21	16.5	30	27	78
TU150-14	14.5	21	16.5	30	27	78
TU150-16	16.5	21	16.5	30	27	78
TU150-20	21	21	16.5	30	27	78

Copper Cable Lug KL90 Series

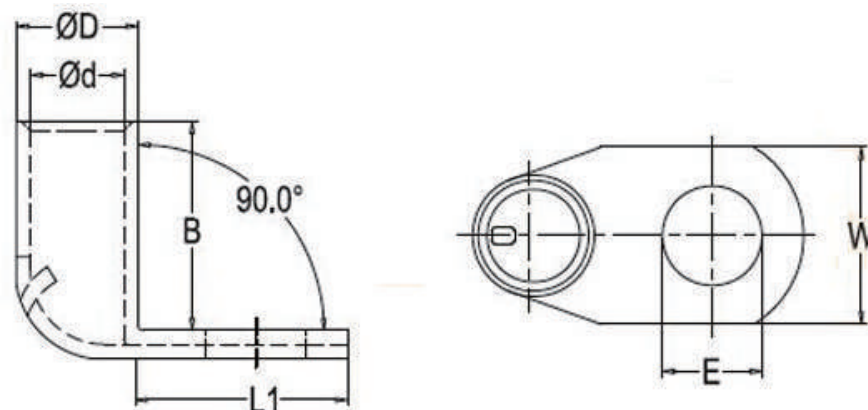

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS

Features


- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	E	Dφ	dφ	W	B	L
KL90-16/5	5.5	8.5	5.5	12	13	17.5
KL90-16/6	6.5	8.5	5.5	12	13	18.8
KL90-16/8	8.5	8.5	5.5	15	13	23
KL90-16/10	10.5	8.5	5.5	17	13	27
KL90-16/12	12.5	5.5	5.5	19	13	31
KL90-25/5	5.5	10	7	14	15	18.5
KL90-25/6	6.5	10	7	14	15	18.5
KL90-25/8	8.5	10	7	16	15	23
KL90-25/10	10.5	10	7	18	15	27
KL90-25/12	12.5	10	7	19	15	31
KL90-25/14	15	10	7	21	15	34.5
KL90-35/6	6.5	12	8.5	17	17	18.5
KL90-35/8	8.5	12	8.5	17	17	23
KL90-35/10	10.5	12	8.5	19	17	27

Item No.	E	Dφ	dφ	W	B	L
KL90-35/12	12.5	12	8.5	21	17	31
KL90-35/14	14.5	12	8.5	21	17	34.5
KL90-35/16	17	12	8.5	26	17	38
KL90-50/6	6.5	14	10	19	19	20.5
KL90-50/8	8.5	14	10	19	19	23
KL90-50/10	10.5	14	10	19	19	27
KL90-50/12	12.5	14	10	23	19	31
KL90-50/14	15	14	10	23	19	34.5
KL90-50/16	17	14	10	28	19	38
KL90-50/20	21	14	10	30	19	43
KL90-70/6	6.5	16.5	12	23	21	23
KL90-70/8	8.5	16.5	12	23	21	24
KL90-70/10	10.5	16.5	12	23	21	28
KL90-70/12	12.5	16.5	12	23	21	31
KL90-70/14	15	16.5	12	23	21	34.5
KL90-70/16	17	16.5	12	28	21	38
KL90-70/20	21	16.5	12	30	21	43
KL90-95/8	8.5	18	13.5	26	25	26
KL90-95/10	10.5	18	13.5	26	25	29
KL90-95/12	12.5	18	13.5	26	25	31
KL90-95/14	15	18	13.5	26	25	34.5
KL90-95/16	17	18	13.5	28	25	28
KL90-95/20	21	18	13.5	36	25	46
KL90-120/8	8.5	19.5	15	20.5	26	30
KL90-120/10	10.5	19.5	15	20.5	26	31
KL90-120/12	12.5	19.5	15	20.5	26	32
KL90-120/14	15	19.5	15	20.5	26	35
KL90-120/16	17	19.5	15	30	26	38
KL90-120/20	21	19.5	15	36	26	46
KL90-150/8	8.5	21	16.5	27	30	30
KL90-150/10	10.5	21	16.5	27	30	31
KL90-150/12	12.5	21	16.5	27	30	33
KL90-150/14	15	21	16.5	27	30	35
KL90-150/16	17	21	16.5	27	30	38
KL90-150/20	21	21	16.5	36	30	46
KL90-185/10	10.5	24	19	35	30	40
KL90-185/12	12.5	24	19	35	30	40
KL90-185/14	15	24	19	35	30	40
KL90-185/16	17	24	19	35	30	40
KL90-185/20	21	24	19	39	30	46
KL90-240/10	10.5	26	21	31	35	43.5

Copper Cable Lug HES Series

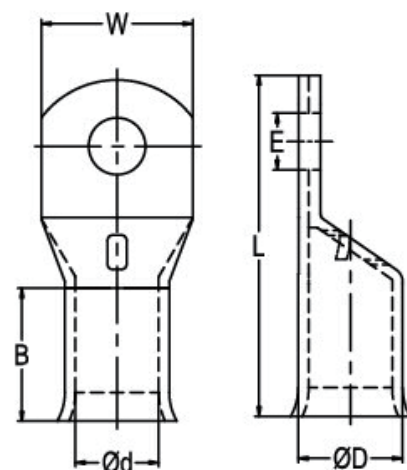

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS

Features


- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	E	Dφ	dφ	W	B	L
HES10-4	4.3	6.6	4.5	11	13	30
HES10-5	5.3	6.6	4.5	11	13	30
HES10-6	6.5	6.6	4.5	11	13	30
HES10-8	8.3	6.6	4.5	12.5	13	30
HES10-10	10.3	6.9	4.5	16	13	34.1
HES10-12	12.7	6.9	4.5	18	12	34.1
HES16-5	5.3	7.5	5.5	11	14	30.7
HES16-6	6.5	7.5	5.5	11	14	30.7
HES16-8	8.3	7.5	5.5	12.5	13	30.7
HES16-10	10.3	7.5	5.5	16	14	35.9
HES16-12	12.7	8.1	5.5	18	13	35.9
HES25-5	5.3	9.1	6.7	13	13	32.2
HES25-6	6.5	9.1	6.7	13	13	32.2
HES25-8	8.3	9.1	6.7	13	13	32.2

Item No.	E	Dφ	dφ	W	B	L
HES25-10	10.3	9.1	6.7	16	14	36.9
HES25-12	12.7	9.1	6.7	18	13	36.9
HES25-14	14.8	9.1	6.7	20	13	38.9
HES35-5	5.3	11	8.6	16	16	37.6
HES35-6	6.5	11	8.6	16	16	37.6
HES35-8	8.3	11	8.6	16	16	37.6
HES35-10	10.3	11	8.6	17	16	41.5
HES35-12	12.7	11	8.6	18	16	41.5
HES35-14	14.8	11	8.6	20	16	43.5
HES35-16	16.5	11	8.6	23	16	45.5
HES50-5	5.3	12.4	9.5	18	17	41
HES50-6	6.5	12.4	9.5	18	17	41
HES50-8	8.3	12.4	9.5	18	17	41
HES50-10	10.3	12.4	9.5	18	17	44
HES50-12	12.7	12.4	9.5	19	17	44
HES50-14	14.8	12.4	9.5	21	19	52.8
HES50-16	16.5	12.4	9.5	23	19	52.8
HES70-5	5.3	15	12	22.5	21.5	52.4
HES70-6	6.3	15	12	22.5	21.5	52.4
HES70-8	8.3	15	12	22.5	21.5	52.4
HES70-10	10.3	15	12	22.5	21.5	52.4
HES70-12	12.7	15	12	22	21.5	52.4
HES70-14	14.8	15	12	22	21.5	55
HES70-16	16.5	15	12	24	20	55
HES95-8	8.3	17	13.4	25	22.5	54.7
HES95-10	10.3	17	13.4	25	22.5	54.7
HES95-12	12.7	17	13.4	25	22.5	54.7
HES95-14	14.8	17	13.4	25	22.5	58.3
HES95-16	16.5	17	13.4	25	22.5	58.3
HES120-8	8.3	19	15	27.5	23	60
HES120-10	10.3	19	15	27.5	23	60
HES120-12	12.7	19	15	27.5	23	60
HES120-14	14.8	19	15	27.5	23	64
HES120-16	16.5	19	15	27.5	23	64
HES150-10	10.3	21.2	16.5	30	27	67
HES150-12	12.7	21.2	16.5	30	27	67
HES150-14	14.8	21.2	16.5	30	27	67
HES150-16	16.5	21.2	16.5	30	27	71.4
HES150-20	20.9	21.2	16.5	30	27	71.4
HES185-10	10.3	23	19	34	30	73
HES185-12	12.7	23	19	34	30	73

Copper Cable Lug CL-H High Voltage Series

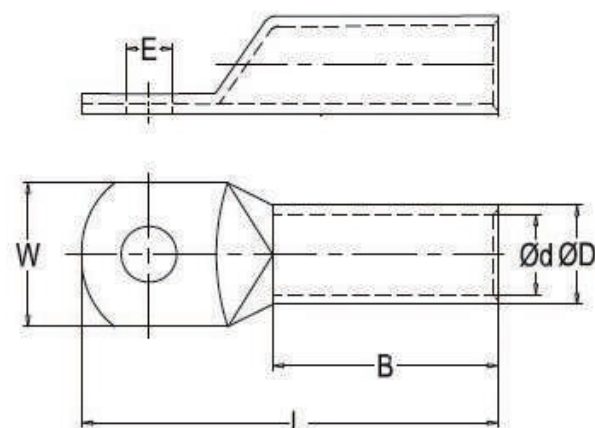

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS

Features

- Long anti-rust time, no sharp corners, excellent conductivity.




Item No.	E	Dφ	dφ	W	B	L
CL14-6	6.4	8.8	5.8	18.3	28.5	50
CL22-8	8.4	11.3	7.7	18.3	28.5	52
CL38-10	10.5	12.4	9.8	18.3	34	64
CL38-12	13	12.4	9.8	18.3	34	64
CL60-10	10.5	14	11	20.5	36	70
CL60-12	13	14	11	20.5	36	70
CL70-10	10.5	15	12	21.4	38	72
CL70-12	13	15	12	21.4	38	72
CL80-12	13	16	13	23.2	38	75
CL100-12	13	18	14	26	40	75
CL125-12	13	20	16	28	40	85
CL150-12	13	22	17	31.5	46	94
CL180-12	13	23	18.2	33	46	98
CL200-12	13	26	20	37	48	104

Item No.	E	Dφ	dφ	W	B	L
CL250-12	13	28	22	41	48	114
CL325-12	13	32	25	46	50	118
CL400-12	13	37	30	54	60	130
CL500-12	13	40	31	57.5	60	150
B-CL14-6	6.4	8.3	5.8	18.3	28.5	50
B-CL22-8	8.4	10.7	7.7	18.3	28.5	52
B-CL38-10	10.5	11.9	9.8	17.2	34	64
B-CL38-12	13	11.9	9.8	17.2	34	64
B-CL60-10	10.5	13.5	11	20	36	70
B-CL60-12	13	13.5	11	20	36	70
B-CL70-10	10.5	14.5	12	21.4	38	72
B-CL70-12	13	14.5	12	21.4	38	72
B-CL80-12	13	15.5	13	23.2	38	75
B-CL100-12	13	17.3	14	25.5	40	75
B-CL125-12	13	19.3	16	28	40	85
B-CL150-12	13	21.1	17	30.5	46	94
B-CL180-12	13	22.1	18.2	32.5	46	98
B-CL200-12	13	24.9	20	36	48	104
B-CL250-12	13	26.9	22	39.5	48	114
B-CL325-12	13	30.7	25	45	50	118
B-CL400-12	13	35.7	30	54	60	130
B-CL500-12	13	38.4	31	56	60	150



Copper Cable Lug CL-H2 High Voltage Series

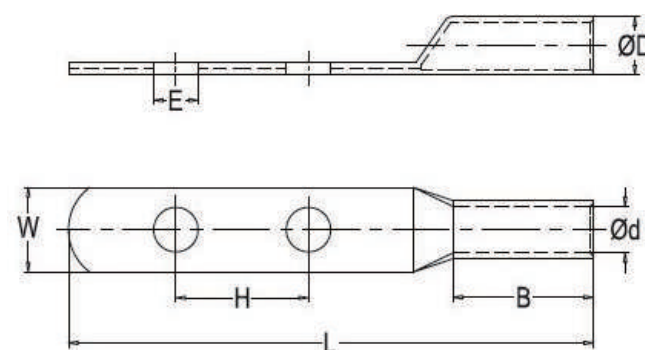

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS

Features

- Long anti-rust time, no sharp corners, excellent conductivity.




Item No.	E	Dφ	dφ	W	B	L
CL14-6-2D	6.4	8.8	5.8	13	28.5	117.5
CL22-8-2D	8.4	11.3	7.7	16	28.5	119.2
CL38-10-2D	10.5	12.4	9.8	18.3	31.7	120
CL38-12-2D	13	12.4	9.8	18.3	31.7	120
CL60-10-2D	10.5	14	11	20.5	40	130
CL60-12-2D	13	14	11	20.5	40	130
CL70-10-2D	10.5	15	12	21.4	40	130
CL70-12-2D	13	15	12	21.4	40	130
CL80-12-2D	13	16	13	23.2	40	130
CL100-12-2D	13	18	14	26	42	132
CL125-12-2D	13	20	16	29	42	135
CL150-12-2D	13	22	17	31	50	150
CL180-12-2D	13	23	18.2	33	50	150
CL200-12-2D	13	26	20	37	52.5	150

Item No.	E	Dφ	dφ	W	B	L
CL250-12-2D	13	28	22	40	50	150
CL325-12-2D	13	32	25	46	68	180
CL400-12-2D	13	37	30	54	60	180
CL500-12-2D	13	40	31	57.5	60	180
B-CL14-6-2D	6.4	8.3	5.8	13	28.5	117.5
B-CL22-8-2D	8.4	10.7	7.7	16	28.5	119.2
B-CL38-10-2D	10.5	11.9	9.8	17.5	31.7	120
B-CL38-12-2D	13	11.9	9.8	17.5	31.7	120
B-CL60-10-2D	10.5	13.5	11	19.5	40	130
B-CL60-12-2D	13	13.5	11	19.5	40	130
B-CL70-10-2D	10.5	14.5	12	21.4	40	130
B-CL70-12-2D	13	14.5	12	21.4	40	130
B-CL80-12-2D	13	15.5	13	23.2	40	130
B-CL100-12-2D	13	17.3	14	26	42	132
B-CL125-12-2D	13	19.3	16	28	42	135
B-CL150-12-2D	13	21.1	17	31	50	150
B-CL180-12-2D	13	22.1	18.2	33	50	150
B-CL200-12-2D	13	24.9	20	36	50	150
B-CL250-12-2D	13	26.9	22	39	50	150
B-CL325-12-2D	13	30.7	25	45	68	180
B-CL400-12-2D	13	35.7	30	54	60	180
B-CL500-12-2D	13	38.4	31	56	60	180



Copper Cable Lug BL High Voltage Series

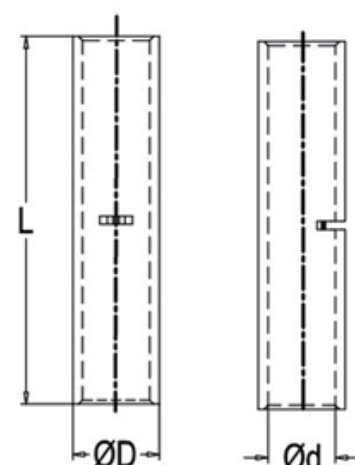

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS

Features


- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	Dφ	dφ	L
BL1.5	3.7	1.8	20
BL2.5	4	2.4	20
BL4	4.8	3.1	20
BL6	5.5	3.8	20
BL10	6.2	4.5	20
BL16	7.1	5.4	40
BL25	8.8	6.8	45
BL35	10.6	8.2	45
BL50	12.4	9.5	45
BL70	14.7	11.2	50
BL95	17.4	13.5	50
BL120	19.4	15	55
BL150	21.2	16.5	60
BL185	23.5	18.5	65

Item No.	Dφ	dφ	L
BL240	26.5	21	80
BL300	30	23.5	85
BL400	36.5	28.5	90
BL500	39	30	100
BL550	41.4	31.7	100
BL630	45	35	110
BL800	50.6	39	150
BL1000	56.2	43	170
BLA-1.5	3.6	1.8	20
BLA-2.5	3.9	2.4	20
BLA-4	4.7	3.1	20
BLA-6	5.4	3.8	20
BLA-10	6.1	4.5	20
BLA-16	7	5.4	40
BLA25	8.6	6.8	45
BLA35	10.4	8.2	45
BLA50	12.2	9.5	45
BLA70	14.4	11.2	50
BLA95	17.1	13.2	50
BLA120	19	15	55
BLA150	20.8	16.5	60
BLA185	23.1	18.5	65
BLA240	26	21	80
BLA300	29.4	23.5	85
BLA400	35.8	28.5	90
BLA500	38.2	30	100
BLA630	44.1	35	110
BLB1.5	3.4	1.8	20
BLB2.5	3.7	2.4	20
BLB4	4.5	3.1	20
BLB6	5.2	3.8	20
BLB10	5.9	4.5	20
BLB16	6.8	5.4	40
BLB25	8.4	6.8	45
BLB35	10.2	8.2	45
BLB50	11.9	9.5	45
BLB70	14.1	11.2	50
BLB95	16.7	13.5	50
BLB120	18.6	15	55
BLB150	20.4	16.5	60
BLB185	22.6	18.5	65

Copper Cable Lug C45 High Voltage Series

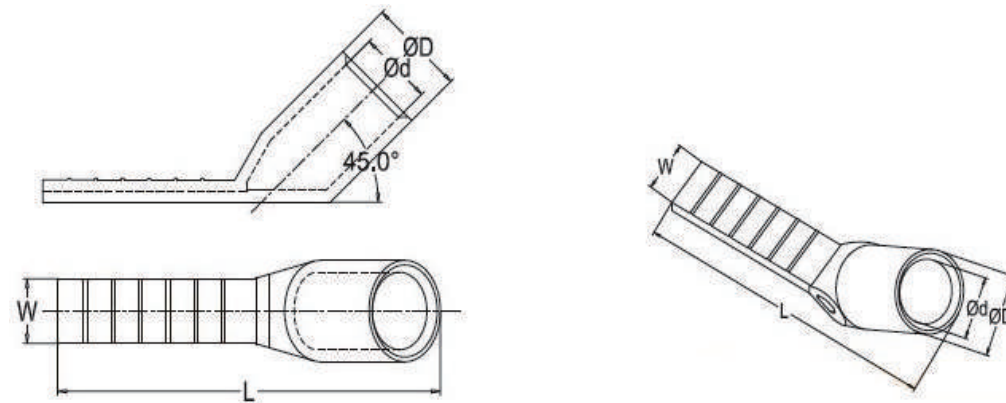

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS


Features

- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	Dφ	dφ	W	L
C45-4	5	3	6.6	24
C45-6	5.9	3.9	7	28
C45-10	6.9	4.9	7	28
C45-16	8.1	5.9	7	31
C45-25	10	7.3	7	33
C45-35	11.2	8.4	7	39
C45-50	12.5	9.5	7	45
C45-70	14.7	11.2	7	50

Copper Cable Lug DTS High Voltage Series

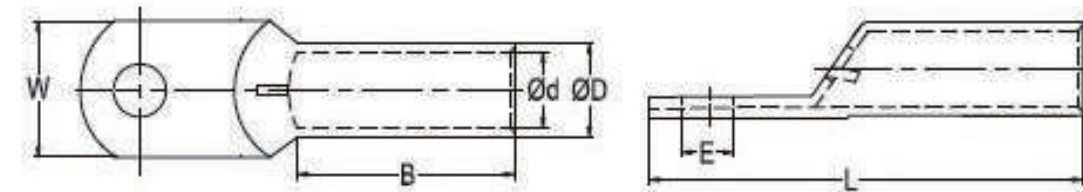

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS


Features

- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	E	Dφ	dφ	W	B
DTS16-6	7	9	6	13	15
DTS25-6	7	10	7	15	20
DTS35-6	7	11	8	16	23
DTS50-8	9	13	10	18.7	23
DTS70-8	9	15	11	21.5	26
DTS95-10	11	18	13	25	28
DTS120-12	13	20	15	28.8	33
DTS150-12	13	22	16	31.5	40
DTS185-16	17	25	19	36	47
DTS240-16	17	27	21	40	50
DTS300-20	21	30	23	43.5	55
DTS400-20	21	34	26	49	60

Copper Cable Lug HUPD45 Series

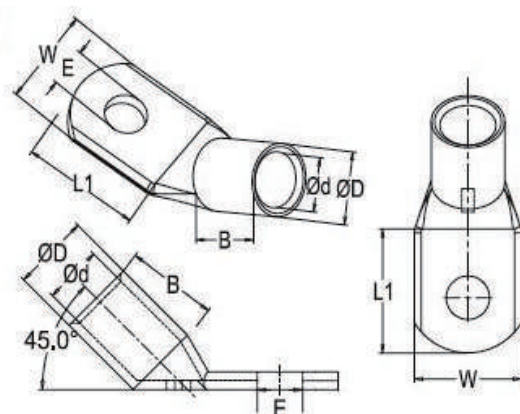

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS

Features


- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	E	Dφ	dφ	W	B	L1
HUPD45-10/5	5.3	8	5.5	12	14	13.5
HUPD45-10/6	6.5	8	5.5	12	14	13.5
HUPD45-10/8	8.5	8	5.5	16	14	18.5
HUPD45-10/10	10.5	8	5.5	16	14	22.5
HUPD45-10/12	13	8	5.5	19	14	22.5
HUPD45-16/5	5.3	9.5	6.6	13	15	13.5
HUPD45-16/6	6.5	9.5	6.6	13	15	13.5
HUPD45-16/8	8.5	9.5	6.6	16	15	20
HUPD45-16/10	10.5	9.5	6.6	17	15	24
HUPD45-16/12	13	9.5	6.6	19	15	24
HUPD45-25/5	5.3	11	7.9	15	17	15
HUPD45-25/6	6.5	11	7.9	15	17	15
HUPD45-25/8	8.5	11	7.9	17	17	20
HUPD45-25/10	10.5	11	7.9	17	17	24

Item No.	E	Dφ	dφ	W	B	L1
HUPD45-25/12	13	11	7.9	19	17	24
HUPD45-35/6	6.5	12.5	9.2	17	19	15
HUPD45-35/8	8.5	12.5	9.2	18	19	20
HUPD45-35/10	10.5	12.5	9.2	18	19	24
HUPD45-35/12	13	12.5	9.2	19	19	24
HUPD45-35/14	15	12.5	9.2	21	19	24
HUPD45-50/6	6.5	15	11	21	21	20
HUPD45-50/8	8.5	15	11	21	21	20
HUPD45-50/10	10.5	15	11	21	21	24
HUPD45-50/12	13	15	11	21	21	26
HUPD45-50/14	15	15	11	23	21	26
HUPD45-50/16	17	15	11	28	21	26
HUPD45-70/8	8.5	17	13	25	25	20
HUPD45-70/10	10.5	17	13	25	25	24
HUPD45-70/12	13	17	13	25	25	26
HUPD45-70/14	15	17	13	25	25	26
HUPD45-70/16	17	17	13	25	25	26
HUPD45-95/8	8.5	19	14.5	28	26	24
HUPD45-95/10	10.5	19	14.5	28	26	24
HUPD45-95/12	13	19	14.5	28	26	26
HUPD45-95/14	15	19	14.5	28	26	26
HUPD45-95/16	17	19	14.5	28	26	26
HUPD45-120/8	8.5	21	16.2	30	30	28
HUPD45-120/10	10.5	21	16.2	30	30	28
HUPD45-120/12	13	21	16.2	30	30	30
HUPD45-120/14	15	21	16.2	30	30	30
HUPD45-120/16	17	21	16.2	30	30	30
HUPD45-120/20	21	21	16.2	36	30	30
HUPD45-150/8	8.5	23	18	34	32	31
HUPD45-150/10	10.5	23	18	34	32	31
HUPD45-150/12	13	23	18	34	32	34
HUPD45-150/14	15	23	18	34	32	37
HUPD45-150/16	17	23	18	34	32	37
HUPD45-150/20	21	23	18	40	32	37
HUPD45-185/10	10.5	26	20.6	39	35	40
HUPD45-185/12	13	26	20.6	39	35	40
HUPD45-185/14	15	26	20.6	39	35	40
HUPD45-185/16	17	26	20.6	39	35	40
HUPD45-185/20	21	26	20.6	39	35	40
HUPD45-240/10	10.5	28	23.1	41	44	33
HUPD45-240/12	13	28	23.1	41	44	33

Copper Cable Lug HUPD90 Series

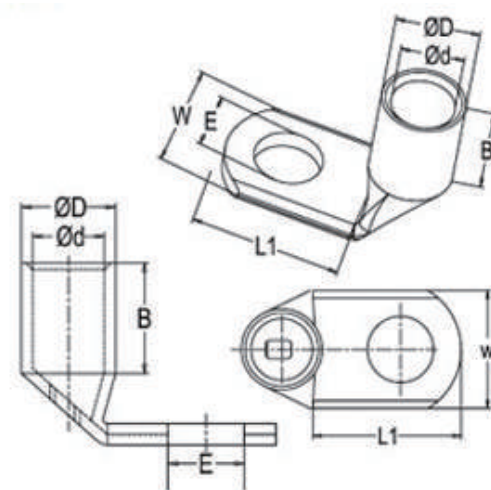

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS

Features


- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	E	Dφ	dφ	W	B	L1
HUPD90-10/5	5.3	8	5.5	12	14	13.5
HUPD90-10/6	6.5	8	5.5	12	14	13.5
HUPD90-10/8	8.5	8	5.5	16	14	18.5
HUPD90-10/10	10.5	8	5.5	16	14	22.5
HUPD90-10/12	13	8	5.5	19	14	22.5
HUPD90-16/5	5.3	9.5	6.6	13	15	13.5
HUPD90-16/6	6.5	9.5	6.6	13	15	13.5
HUPD90-16/8	8.5	9.5	6.6	16	15	20
HUPD90-16/10	10.5	9.5	6.6	17	15	24
HUPD90-16/12	13	9.5	6.6	19	15	24
HUPD90-25/5	5.3	11	7.9	15	17	15
HUPD90-25/6	6.5	11	7.9	15	17	15
HUPD90-25/8	8.5	11	7.9	17	17	20
HUPD90-25/10	10.5	11	7.9	17	17	24

Item No.	E	Dφ	dφ	W	B	L1
HUPD90-25/12	13	11	7.9	19	17	24
HUPD90-35/6	6.5	12.5	9.2	17	19	15
HUPD90-35/8	8.5	12.5	9.2	18	19	20
HUPD90-35/10	10.5	12.5	9.2	18	19	24
HUPD90-35/12	13	12.5	9.2	19	19	24
HUPD90-35/14	15	12.5	9.2	21	19	24
HUPD90-50/6	6.5	15	11	21	21	20
HUPD90-50/8	8.5	15	11	21	21	20
HUPD90-50/10	10.5	15	11	21	21	24
HUPD90-50/12	13	15	11	21	21	26
HUPD90-50/14	15	15	11	23	21	26
HUPD90-50/16	17	15	11	28	21	26
HUPD90-70/8	8.5	17	13	25	25	20
HUPD90-70/10	10.5	17	13	25	25	24
HUPD90-70/12	13	17	13	25	25	26
HUPD90-70/14	15	17	13	25	25	26
HUPD90-70/16	17	17	13	25	25	26
HUPD90-95/8	8.5	19	14.5	28	26	24
HUPD90-95/10	10.5	19	14.5	28	26	24
HUPD90-95/12	13	19	14.5	28	26	26
HUPD90-95/14	15	19	14.5	28	26	26
HUPD90-95/16	17	19	14.5	28	26	26
HUPD90-120/8	8.5	21	16.2	30	30	28
HUPD90-120/10	10.5	21	16.2	30	30	28
HUPD90-120/12	13	21	16.2	30	30	30
HUPD90-120/14	15	21	16.2	30	30	30
HUPD90-120/16	17	21	16.2	30	30	30
HUPD90-120/20	21	21	16.2	36	30	30
HUPD90-150/8	8.5	23	18	34	32	31
HUPD90-150/10	10.5	23	18	34	32	31
HUPD90-150/12	13	23	18	34	32	34
HUPD90-150/14	15	23	18	34	32	37
HUPD90-150/16	17	23	18	34	32	37
HUPD90-150/20	21	23	18	40	32	37
HUPD90-185/10	10.5	26	20.6	39	35	40
HUPD90-185/12	13	26	20.6	39	35	40
HUPD90-185/14	15	26	20.6	39	35	40
HUPD90-185/16	17	26	20.6	39	35	40
HUPD90-185/20	21	26	20.6	39	35	40
HUPD90-240/10	10.5	28	23.1	41	44	33
HUPD90-240/12	13	28	23.1	41	44	33

Copper Cable Lug KS Series

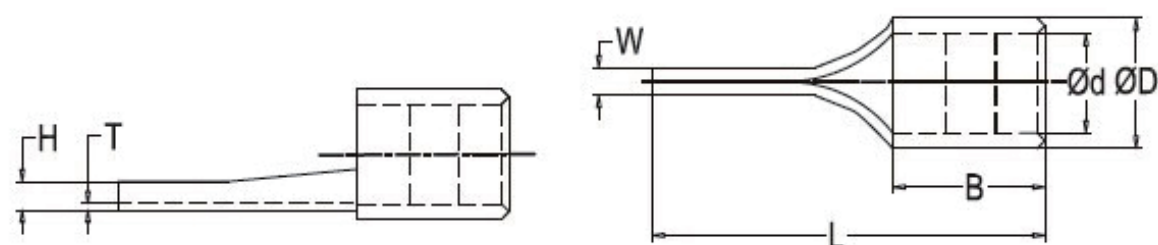

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS


Features

- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	D	d	B	L	W	H	T
KS10-12	22	8	4.3	4.5	6.9	2.4	1.1
KS16-13	26	10	5.5	5.9	8.4	2.6	1.2
KS25-15	33.5	13.5	6.8	7	9.5	2.6	1.2
KS35-20	40.5	16	8	8.7	11.8	3.2	1.5
KS50-20	45	19	9.5	9.8	13.6	3.8	1.8
KS70-25	55	24	11	11.6	15.8	4.2	2
KS95-25	55	24	12.5	13.7	18.9	5.2	2.5
KS120-34	62	26	14.3	15.1	21.3	6.2	3

Copper Cable Lug KSN Series

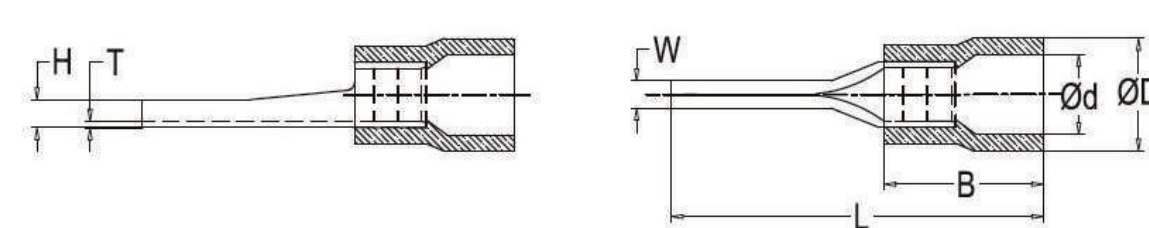

Specification

- Material: Copper
- Working Temperature: -40°C to 150°C
- Certificates: UL, CE, RoHS


Features

- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	D	d	B	L	W	H	T
KS10-12N	9	4.5	15.5	29.5	4.3	2.4	1.1
KS16-13N	10.5	5.9	19	35	5.5	2.6	1.2
KS25-15N	11.5	7	24.5	44.5	6.8	2.6	1.2
KS35-20N	14	8.7	29.5	54	8	3.2	1.5
KS50-20N	15.8	9.8	35	61	9.5	3.8	1.8
KS70-25N	18	11.6	44	75	11	4.2	2
KS95-25N	21.6	13.7	44	75	12.5	5.2	2.5

Insulated Cable Terminal BRF Series

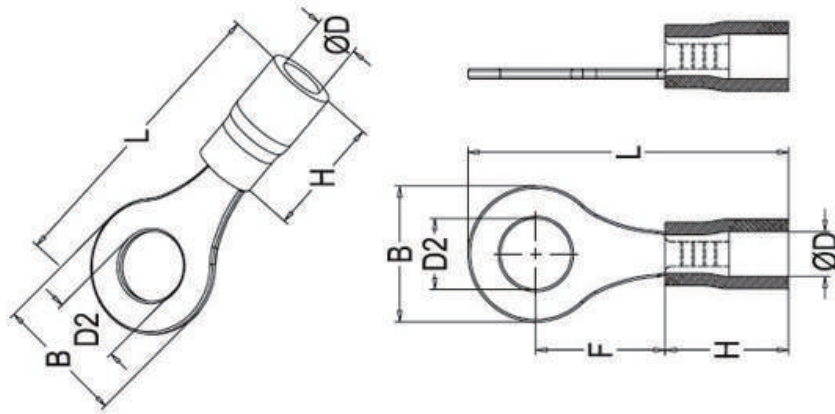

Specification

- Material: Copper, PVC jacket.
- Working Temperature: -40°C to 80°C heat resistant
- Certificates: UL, CE, RoHS

Features


- Long anti-rust time, no sharp corners, excellent conductivity, Better durability of PVC jacket.



Item No.	AWG/mm ²	Diameter of bolt D2	B mm	L mm	F mm	H mm	Dφ mm	Color
BRF1.25-3	AWG:22-16 mm ² :0.5-1.5 current: 19A Packing:1000PCS	3.2mm	5.7	17.8	4.95	10	4.3	Red
BRFS1.25-3.5		3.7mm	5.7	17.8	4.95			
BRFM1.25-3.5		3.7mm	6.6	20.1	6.3			
BRFL1.25-3.5		3.7mm	8	21.5	7			
BRFS1.25-4		4.3mm	6.6	20.1	6.3			
BRFL1.25-4		4.3mm	8	21.5	7			
BRF1.25-5		5.3mm	8	21.5	7			
BRFL1.25-5		5.3mm	9.8	23	8.5			
BRFS1.25-6		6.5mm	9.8	23	8.5			
BRF1.25-6		6.5mm	11.6	27.5	11.1			
BRF1.25-8		8.4mm	11.6	27.5	11.1			
BRF1.25-10		10.5mm	13.6	31.6	13.9			
BRF1.25-12		13.0mm	19.2	36	16.5			

Item No.	AWG/mm ²	Diameter of bolt D2	B mm	L mm	F mm	H mm	Dφ mm	Color
BRF2-3	AWG:16-14 mm ² :1.5-2.5 current: 27A Packing:1000PCS	3.2mm	6.6	17.8	4.3	10	4.9	Blue
BRFS2-3.5		3.7mm	6.6	17.8	4.3			
BRFM2-3.5		3.7mm	6.6	21	7			
BRFL2-3.5		3.7mm	8.5	22.5	7.75			
BRFS2-4		4.3mm	6.6	19.5	6.5			
BRFL2-4		4.3mm	8.5	22.5	7.75			
BRFS2-5		5.3mm	8.5	22.5	7.75			
BRFL2-5		5.3mm	9.5	22.5	7.25			
BRF2-6		6.5mm	12	27.6	11			
BRF2-8		8.4mm	12	27.6	11			
BRF2-10		10.5mm	14	31	13.9			
BRF2-12		13.0mm	19.2	36.5	16.5			
BRF3.5-4	AWG:12-14 mm ² :2.5-4 current: 37A Packing:500PCS	4.3mm	8	24.5	7.7	13.5	6.7	Black
BRFS3.5-5		5.3mm	8	24.5	7.7			
BRFL3.5-5		5.3mm	12	27.9	7.7			
BRF3.5-6		6.5mm	12	27.9	7.7			
BRF3.5-8		8.4mm	15	32	13.5			
BRF3.5-10		10.5mm	15	32	13.5			
BRF5.5-3.5	AWG:12-10 mm ² :4-6 current: 48A Packing:500PCS	3.7mm	7.2	21.4	5.9	13.5	6.7	Yellow
BRFS5.5-4		4.3mm	7.2	21.4	5.9			
BRFL5.5-4		4.3mm	9.5	26.5	8.3			
BRF5.5-5		5.3mm	9.5	26.5	8.3			
BRF5.5-6		6.5mm	12	31	13			
BRF5.5-8		8.4mm	15	33.7	13.7			
BRF5.5-10		10.5mm	15	33.7	13.7			
BRF5.5-12		13.0mm	19.2	38.1	16			
BRF8-3	AWG:8 mm ² :6-10 current: 62A Packing:100PCS	3.7mm	10	30		17.5	4.5	Red
BRF8-4		4.3mm	10	30				
BRF8-5		5.3mm	10	30				
BRF8-6		6.4mm	11	31.5				
BRF8-8		8.4mm	14	36				
BRF8-10		10.5mm	18	39.5				

Non-Insulated Cable Terminal R Series

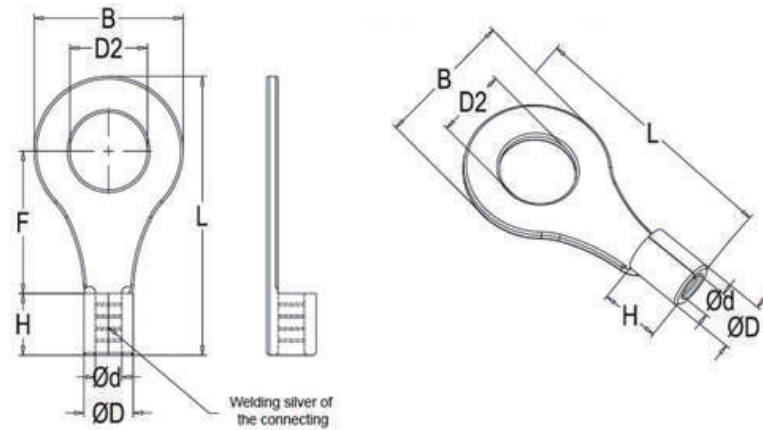

Specification

- Material: Copper,
- Working Temperature: -40°C to 80°C heat resistant
- Certificates: UL, CE, RoHS

Features

- Long anti-rust time, no sharp corners, excellent conductivity,



Insulated square: 0.5~1.5mm ² (AWG22~16)Max. current: I _{max} =19A								
Item No	DIMENSION							
	American bolt No.	Dia.of bolt d2φ	B mm	L mm	F mm	H mm	Dφ mm	dφ mm
R1.25-3	#4	3.2mm	5.5	12.5	5	4.8	3.4	1.7
RS1.25-3.5	#6	3.7mm	5.5	12.5	5			
RM1.25-3.5	#6	3.7mm	6.6	14.4	6.3			
RL1.25-3.5	#6	3.7mm	8	15.8	7			
RS1.25-4	#8	4.3mm	6.6	14.4	6.3			
RL1.25-4	#8	4.3mm	8	15.8	7			
R1.25-5	#10	5.3mm	8	15.8	7			
RL1.25-5	#10	5.3mm	9.8	18	8.5			
RS1.25-6	1/4	6.4mm	9.8	18	8.5			
RL1.25-6	1/4	6.4mm	11.6	21.8	11			
R1.25-8	5/16	8.4mm	11.6	21.8	11			
R1.25-10	3/8	10.5mm	13.6	25.5	13.9			
R1.25-12	1/2	13.0mm	19.2	30.4	16			

Insulated square: 1.25 ~ 2.5mm ² (AWG16 ~ 14)Max. current: I _{max} = 27A								
Item No	DIMENSION							
	American bolt No.	Dia.of bolt d2φ	B mm	L mm	F mm	H mm	Dφ mm	dφ mm
R2-3	#4	3.2mm	6.6	12.8	4.8	4.8	4.1	2.3
RS2-3.5	#6	3.7mm	6.6	12.8	4.8			
RM2-3.5	#6	3.7mm	6.6	14	6.3			
RL2-3.5	#6	3.7mm	8.5	16.5	7.4			
RS2-4	#8	4.3mm	6.6	14.4	6.3			
RL2-4	#8	4.3mm	8.5	16.5	7.4			
RS2-5	#10	5.3mm	8.5	16.5	7.4			
RL2-5	#10	5.3mm	9.5	17	7.4			
R2-6	1/4	6.5mm	12	21.8	11			
R2-8	5/16	8.4mm	12	21.8	11			
R2-10	3/8	10.5mm	13.6	25.5	13.9			
R2-12	1/2	13.0mm	19.2	30.4	16			


Insulated square: 2.5~4mm ² (AWG14~12)Max. current: I _{max} =37A								
Item No	DIMENSION							
	American bolt No.	Dia.of bolt d2φ	B mm	L mm	F mm	H mm	Dφ mm	dφ mm
R3.5-4	#8	4.3mm	8	18	7.7	6	5	3
RS3.5-5	#10	5.3mm	8	18	7.7			
RL3.5-5	#10	5.3mm	12	21.4	7.7			
R3.5-6	1/4	6.4mm	12	21.4	7.7			
R3.5-8	3/16	8.4mm	15	27	13.5			
R3.5-10	3/8	10.5mm	15	27	13.5			

Insulated square: 4 ~ 6mm ² (AWG12 ~ 10)Max. current: I _{max} =48A								
Item No	DIMENSION							
	American bolt No.	Dia.of bolt d2φ	B mm	L mm	F mm	H mm	Dφ mm	dφ mm
R5.5-3.5	#6	3.7mm	7.2	15.7	6.1	6.8	5.6	3.4
RS5.5-4	#8	4.3mm	7.2	15.7	6.1			
RL5.5-4	#8	4.3mm	9.5	19	8.3			
R5.5-5	#10	5.3mm	9.5	19	8.3			
R5.5-6	1/4	6.5mm	12	22.5	10.5			
R5.5-8	5/16	8.4mm	15	27	13.3			
R5.5-10	3/8	10.5mm	15	27	13.3			
R5.5-12	1/2	13.0mm	19.2	31.6	16			

Insulated square: 6 ~ 10mm ² (8)Max. current: I _{max} =62A								
Item No	DIMENSION							
	American bolt No.	Dia.of bolt d2φ	B mm	L mm	F mm	H mm	Dφ mm	dφ mm
R8-4	#8	4.3mm	8.8	23.8	9.3	8.5	7.2	4.5
RS8-5	#10	5.3mm	8.8	23.8	10.5			
RM8-5	#10	5.3mm	12	23.8	9.3			
RL8-5	#10	5.3mm	15	29.8	13.8			
RS8-6	1/4	6.5mm	12	23.8	9.3			
RL8-6	1/4	6.5mm	15	29.8	13.8			
R8-8	5/16	8.4mm	15	29.8	13.8			
R8-10	3/8	10.5mm	15	29.8	13.8			
R8-12	1/2	13.0mm	20	33.5	15			

- Please kindly email us at info@bazaent.com or visit our website for more data of it:
<http://www.bazaent.com/product-detail/non-insulated-ring-terminals-wire-connector-r/>

Insulated Spade Terminal YF Series

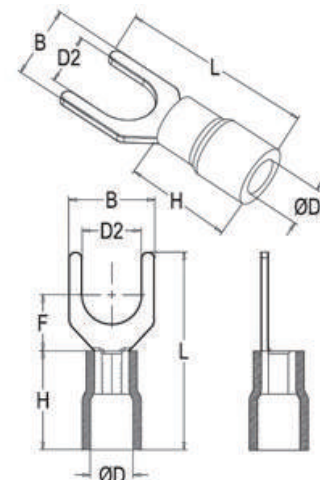

Specification

- Material: Copper, PVC jacket.
- Working Temperature: -40°C to 80°C heat resistant
- Certificates: UL, CE, RoHS

Features

- Long anti-rust time, no sharp corners, excellent conductivity, Better durability of PVC jacket.




Size of cable: 0.5-1.5mm ² (AWG 22-16) Max.Current=19A								
ITEM NO	DIMENSION							color
	American bolt number	Dia.of bolt D2 (mm)	B mm	L mm	F mm	H mm	Dφ mm	
YF1.25—3	#4	3.2mm	5.7	21.2	6.5	10	4.3	red
YFS1.25 - 3.5	#6	3.7mm	5.7	21.2	6.5			
YFL1.25 - 3.5	#6	3.7mm	6.4	21.2	6.5			
YFS1.25 - 4	#8	4.3mm	6.4	21.2	6.5			
YFM1.25-4	#8	4.3mm	7.2	21.2	6.5			
YFL1.25-4	#8	4.3mm	8.1	21.2	6.5			
YFS1.25-5	#10	5.3mm	8.1	21.2	6.5			
YFL1.25-5	#10	5.3mm	9.5	21.2	6.5			
YFS1.25-6	1/4	6.5mm	9.5	21.2	6.5			
YFL1.25-6	1/4	6.5mm	12	27.2	11			

Size of cable: 1.5-2.5mm ² (AWG 16-14) Max.Current=27A								
ITEM NO	DIMENSION							color
	American bolt number	Dia.of bolt D2(mm)	B mm	L mm	F mm	H mm	Dφ mm	
YF2-3	#4	3.2mm	5.7	21.2	6.5	10	4.9	blue
YFS2-3.5	#6	3.7mm	5.7	21.2	6.5			
YFL2-3.5	#6	3.7mm	6	21.2	6.5			
YFS2-4	#8	4.3mm	6.4	21.2	6.5			
YFM2-4	#8	4.3mm	7.2	21.2	6.5			
YFL2-4	#8	4.3mm	8.1	21.2	6.5			
YFS2-5	#10	5.3mm	8.1	21.2	6.5			
YFL2-5	#10	5.3mm	9.5	21.2	6.5			
YFS2-6	1/4	6.5mm	9.5	21.2	6.5			
YFL2-6	1/4	6.5mm	12	27.2	11			

Size of cable: 2.5-4mm ² (AWG 14-12) Max.Current=37A								
ITEM NO	DIMENSION							color
	American bolt number	Dia.of bolt D2(mm)	B mm	L mm	F mm	H mm	Dφ mm	
YF3.5-3	#4	3.2mm	5.7	24.8	7	13.5	6.2	black
YF3.5-4	#8	4.3mm	8	24.8	7			
YF3.5-5	#10	5.3mm	8	24.8	7			
YF3.5-6	1/4	6.5mm	12	28	12.1			

Size of cable: 4-6mm ² (AWG 12-10) Max.Current=48A								
ITEM NO	DIMENSION							color
	American bolt number	Dia.of bolt D2(mm)	B mm	L mm	F mm	H mm	Dφ mm	
YF 5.5 - 3.5	#6	3.7mm	8.3	25.2	7.5	13.5	6.7	yellow
YFS 5.5 - 4	#8	4.3mm	8.3	25.2	7.5			
YFL 5.5 - 4	#8	4.3mm	9	23.9	7.5			
YF 5.5 - 5	#10	5.3mm	9	23.9	7.5			
YFS 5.5 - 6	1/4	6.5mm	9	23.9	7.5			
YFL 5.5 - 6	1/4	6.5mm	12	31.2	12			
YF5.5 - 8	5/16	8.4mm	14	30	11.5			

Non-Insulated Spade Terminal Y Series

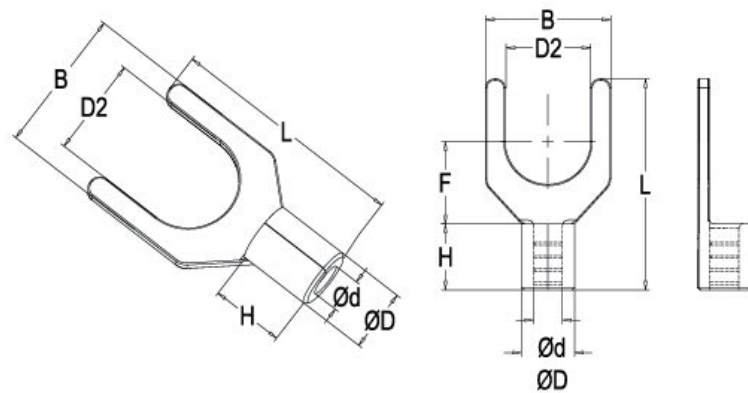

Specification

- Material: Copper, PVC jacket.
- Working Temperature: -40°C to 85°C heat resistant
- Certificates: UL, CE, RoHS

Features

- Long anti-rust time, no sharp corners, excellent conductivity, Better durability of PVC jacket.



Size of cable: 0.5-1.5mm ² (American standar 22-16) Max.Current=19A								
Item No	DIMENSION							
	American bolt number	Dia.of bolt D2	B mm	L mm	F mm	H mm	Dφ mm	dφ mm
Y1.25-3	#4	3.2mm	5.7	16	6.5	4.8	3.4	1.7
YS1.25-3.5	#6	3.7mm	5.7	16	6.5			
YL1.25-3.5	#6	3.7mm	6.4	16	6.5			
YS1.25-4	#8	4.3mm	6.4	16	6.5			
YM1.25-4	#8	4.3mm	7.2	16	6.5			
YL1.25-4	#8	4.3mm	8.1	16	6.5			
YS1.25-5	#10	5.3mm	8.1	16	6.5			
YL1.25-5	#10	5.3mm	9.5	16	6.5			
YS1.25-6	1/4	6.5mm	9.5	16	6.5			
YL1.25-6	1/4	6.5mm	12	22	11			

Size of cable: 1.5-2.5mm ² (American standar 16-14) Max.Current=27A								
Item No	DIMENSION							
	American bolt number	Dia.of bolt D2	B mm	L mm	F mm	H mm	Dφ mm	dφ mm
Y2-3	#4	3.2mm	5.7	16	6.5	4.8	4.1	2.3
YS2-3.5	#6	3.7mm	5.7	16	6.5			
YL 2-3.5	#6	3.7mm	6	16	6.5			
YS 2-4	#8	4.3mm	6.4	16	6.5			
YM2-4	#8	4.3mm	7.2	16	6.5			
YL2-4	#8	4.3mm	8.1	16	6.5			
YS2-5	#10	5.3mm	8.1	16	6.5			
YL2-5	#10	5.3mm	9.5	16	6.5			
YS2-6	1/4	6.5mm	9.5	16	6.5			
YL2-6	1/4	6.5mm	12	22	11			


Size of cable: 2.5-4mm ² (American standar 14-12) Max.Current=37A								
Item No	DIMENSION							
	American bolt number	Dia.of bolt D2	B mm	L mm	F mm	H mm	Dφ mm	dφ mm
Y3.5-3	#4	3.2mm	5.7	18.3	7	6	5	3
Y3.5-4	#8	4.3mm	8	18.3	7			
Y3.5-5	#10	5.3mm	8	18.3	7			
Y3.5-6	1/4	6.5mm	12	21.5	12.1			

Size of cable: 4-6mm ² (American standar 12-10) Max.Current=48A								
Item No	DIMENSION							
	American bolt number	Dia.of bolt D2	B mm	L mm	F mm	H mm	Dφ mm	dφ mm
Y5.5-3.5	#6	3.7mm	8.3	19.5	7.5	6.8	5.6	3.4
Y5.5-3.5	#6	3.7mm	8.3	18.5	7			
YS5.5-4	#8	4.3mm	8.3	19.5	7.5			
YL5.5-4	#8	4.3mm	9	18.2	7.5			
Y5.5-5	#10	5.3mm	9	18.2	7.5			
YS5.5-6	1/4	6.5mm	9	18.2	7.5			
YL5.5-6	1/4	6.5mm	12	25.5	12			
Y5.5-8	5/16	8.4mm	14	24.5	11.5			

Non-Insulated Spade Terminal Y Series

Size of cable: 6-10mm ² (American standar 8) Max.Current=62A								
Item No	DIMENSION							
	American bolt number	Dia.of bolt D2	B mm	L mm	F mm	H mm	Dφ mm	dφ mm
Y8-4	#8	4.3mm	9	20.8	8.1	8.5	7.2	4.5
Y8-5	#10	5.3mm	9	20.8	8.1			
Y8-6	1/4	6.5mm	12	23.8	9.2			
Y8-8	5/16	8.4mm	13.8	25.4	10.7			
Y8-10	3/8	10.5mm	15.9	25.4	10.7			
Size of cable: 10-16mm ² (American standar 6) Max.Current=88A								
Item No	DIMENSION							
	American bolt number	Dia.of bolt D2	B mm	L mm	F mm	H mm	Dφ mm	dφ mm
Y14-4	#8	4.3mm	11	25.5	10.7	10.5	9	5.8
Y14-5	#10	5.3mm	11	25.5	10.7			
Y14-6	1/4	6.5mm	11	25.5	10.7			
Y14-8	5/16	8.4mm	13.8	28.5	10.7			
Y14-10	3/8	10.5mm	15.9	28.5	10.7			
Size of cable: 16-25mm ² (American standar 4) Max.Current=115A								
Item No	DIMENSION							
	American bolt number	Dia.of bolt D2	B mm	L mm	F mm	H mm	Dφ mm	dφ mm
Y22-5	#10	5.3mm	11	27.7	9.5	12	11.5	7.7
Y22-6	1/4	6.5mm	11	27.7	9.5			
Y22-8	5/16	8.4mm	16.5	33.5	13.5			
Y22-10	3/8	10.5mm	16.5	33.5	13.5			
Size of cable: 35-50mm ² (American standar 2) Max.Current=160A								
Item No	DIMENSION							
	American bolt number	Dia.of bolt D2	B mm	L mm	F mm	H mm	Dφ mm	dφ mm
Y38-6	1/4	6.5mm	15.9	35	13.5	14	13.3	9.4
Y38-8	5/16	8.4mm	15.9	35	13.5			
Y38-10	3/8	10.5mm	15.9	35	13.5			
Y38-12	1/2	13.0mm	19	39	15.5			

Insulated Bullet Terminal BFB Series

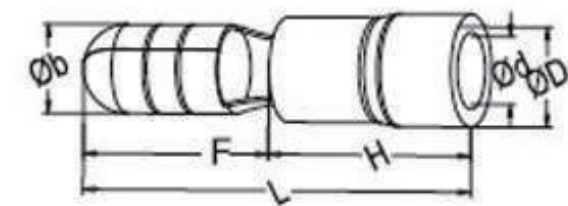

Specification

- Material: Copper, PVC jacket.
- Working Temperature: -40°C to 85°C heat resistant
- Certificates: UL, CE, RoHS


Features

- Long anti-rust time, no sharp corners, excellent conductivity, Better durability of PVC jacket.



Insulated square：0.5～1.5mm ² (22～16) Max. current: I _{max} =10A								
Item No	Thickness of material	DIMENSION						Color
		bφ	F	Dφ	d	H	L	
	mm	mm	mm	mm	mm	mm	mm	
BFB1.25-156	0.4	4	11	3.5	1.7	10	21	Red
Insulated square：1.5～2.5mm ² (16～14) Max. current: I _{max} =15A								
Item No	Thickness of material	DIMENSION						Color
		bφ	F	Dφ	d	H	L	
	mm	mm	mm	mm	mm	mm	mm	
BFB2-156	0.4	4	11	4	2.3	10	21	Blue
BFB2-195	0.4	5	11	4	2.3	10	21	
Insulated square：4～6mm ² (12～10) Max. current: I _{max} =24A								
Item No	Thickness of material	DIMENSION						Color
		bφ	F	Dφ	d	H	L	
	mm	mm	mm	mm	mm	mm	mm	
BFB5.5-195	0.4	4	11	5	3.4	14	25	Yellow

Insulated Bullet Terminal BFA Series

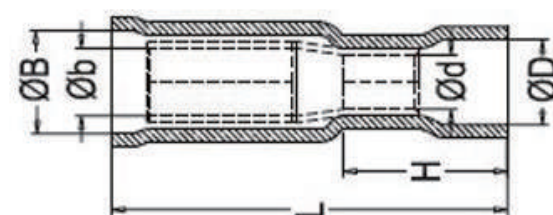

Specification

- Material: Copper, PVC jacket.
- Working Temperature: -40°C to 85°C heat resistant
- Certificates: UL, CE, RoHS


Features

- Long anti-rust time, no sharp corners, excellent conductivity, Better durability of PVC jacket.



Insulated square: 0.5 ~ 1.5mm ² (22 ~ 16) Max. current: I _{max} =10A								
Item No	Thickness of material	DIMENSION						Color
		bφ	Bφ	Dφ	d	F	L	
FA1.25-156	mm	mm	mm	mm	mm	mm	mm	Red
FA1.25-156	0.4	4	6.3	2.7	1.7	13	24.5	Red
Insulated square: 1.5 ~ 2.5mm ² (16 ~ 14) Max. current: I _{max} =15A								
Item No	Thickness of material	DIMENSION						Color
		bφ	Bφ	Dφ	d	F	L	
FA2-156	mm	mm	mm	mm	mm	mm	mm	Blue
FA2-156	0.4	4	6.3	3.3	2.3	14	24.5	
FA2-195	0.4	5	7	3.3	2.3	14	24.5	Blue
Insulated square: 4 ~ 6mm ² (12 ~ 10) Max. current: I _{max} =24A								
Item No	Thickness of material	DIMENSION						Color
		bφ	Bφ	Dφ	dφ	F	L	
FA5.5-195	mm	mm	mm	mm	mm	mm	mm	Yellow
FA5.5-195	0.4	5	7	4.5	3.4	14	29.5	

Insulated Terminal BLBV Series

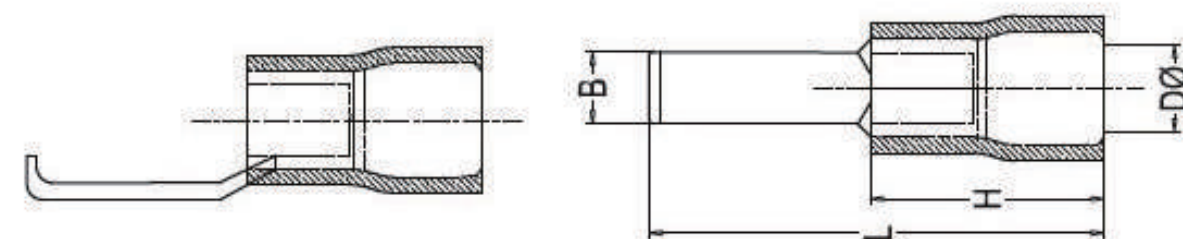

Specification

- Material: Copper, PVC jacket.
- Working Temperature: -40°C to 85°C heat resistant
- Certificates: UL, CE, RoHS


Features

- Long anti-rust time, no sharp corners, excellent conductivity, Better durability of PVC jacket.



Item No.	AWG mm ²	B mm	L mm	H mm	Dφ mm	Color
LBV1.25-3	22-16	3	26.8	10	4.3	Red
LBV1.25-4.6	0.5-1.5 19A 1000PCS					
LBV2-3	16-14	3	26.8	10	4.9	Blue
LBV2-4.6	1.5-2.5 27A 1000pcs					
LBV5.5-3	12/10	3	29.3	13	6.7	Yellow
LBV5.5-4.6	4/6 48A 500PCS					

Insulated Female Terminal BLVA Series

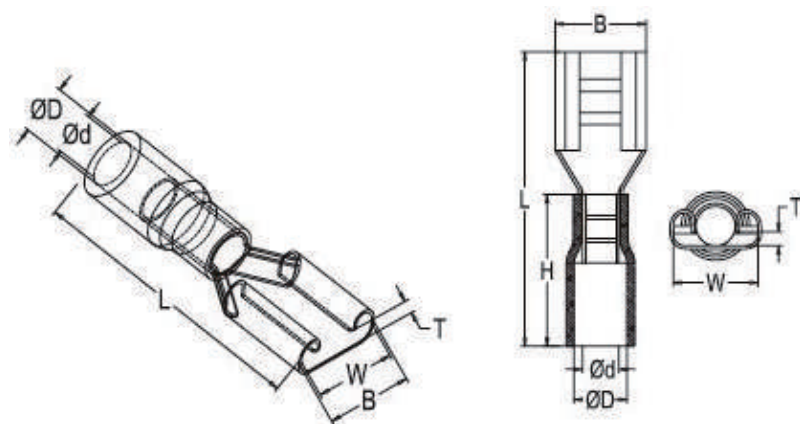

Specification

- Material: Copper, PVC jacket.
- Working Temperature: -40°C to 85°C heat resistant
- Certificates: UL, CE, RoHS

Features

- Long anti-rust time, no sharp corners, excellent conductivity, Better durability of PVC jacket.




Insulated square: 0.5 ~ 1.5mm ² (22 ~ 16)Max. current: I _{max} =10A							
Item No	NEMA-TAB T*W mm	Thickness mm	DIMENSION				
			B mm	dφ mm	Dφ mm	L mm	H mm
BLVA1.25-110(5)	0.5×2.8	0.3	3.8	1.7	3.8	19	10
BLVA1.25-110(8)	0.8×2.8	0.3	3.8	1.7	3.8	19	
BLVA1.25-187(5)	0.5×4.75	0.35	5.6	1.7	3.8	19	
BLVA1.25-187(8)	0.8×4.75	0.35	5.6	1.7	3.8	19	
BLVA1.25-205	0.5×5.2	0.35	6.5	1.7	3.8	20	
BLVA1.25-250	0.8×6.35	0.4	7.4	1.7	3.8	21	

Insulated square: 1.5 ~ 2.5mm ² (16 ~ 14)Max. current: I _{max} =15A							
Item No	NEMA-TAB T*W mm	Thickness mm	DIMENSION				
			B mm	dφ mm	Dφ mm	L mm	H mm
BLVA2-110(5)	0.5×2.8	0.3	3.8	2.3	4.3	19	10
BLVA2-110(8)	0.8×2.8	0.3	3.8	2.3	4.3	19	
BLVA2-187(5)	0.5×4.75	0.35	5.6	2.3	4.3	19	
BLVA2-187(8)	0.8×4.75	0.35	5.6	2.3	4.3	19	
BLVA2-205	0.5×5.2	0.35	6.5	2.3	4.3	20	
BLVA2-250	0.8×6.35	0.4	7.4	2.3	4.3	21	
BLVA2-312	0.8×8.0	0.4	9	2.3	4.3	23	
Insulated square: 4~6mm ² (12~10)Max. current: I _{max} =24A							
Item No	NEMA-TAB T*W mm	Thickness mm	DIMENSION				
			B mm	dφ mm	Dφ mm	L mm	H mm
BLVA5.5-250	0.8×6.35	0.4	7.4	3.4	5.7	25	14
BLVA5.5-312	1.2×9.4	0.5	10.9	3.4	5.7	29.6	13.5



Insulated Male Terminal BLVB Series

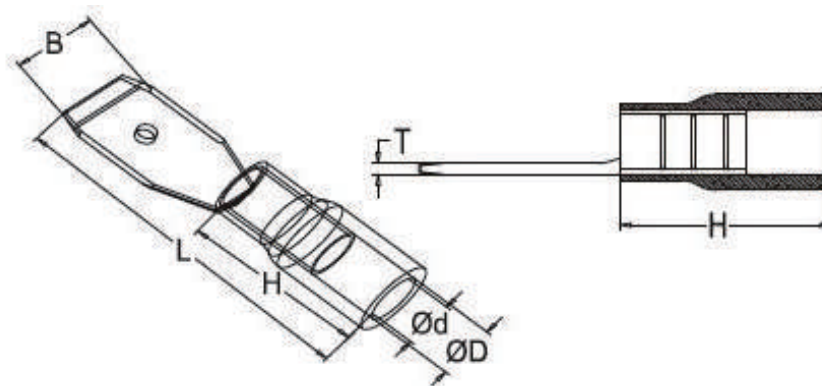

Specification

- Material: Copper, PVC jacket.
- Working Temperature: -40°C to 85°C heat resistant
- Certificates: UL, CE, RoHS

Features

- Long anti-rust time, no sharp corners, excellent conductivity, Better durability of PVC jacket.




Item No	NEMA-TAB mm	Thickness mm	DIMENSION				
			B mm	dφ mm	Dφ mm	L mm	H mm
BLVB1.25-110(5)	0.5×2.8	0.5	2.8	1.7	4.3	17.7	10
BLVB1.25-110(8)	0.8×2.8	0.8	2.8	1.7	4.3	17.7	
BLVB1.25-187(5)	0.5×4.75	0.5	4.75	1.7	4.3	20	
BLVB1.25-187(8)	0.8×4.75	0.8	4.75	1.7	4.3	21	
BLVB1.25-250	0.8×6.35	0.4*2	6.35	1.7	4.3	21	

Item No	NEMA-TAB mm	Thickness mm	DIMENSION				
			B mm	dφ mm	Dφ mm	L mm	H mm
BLVB2-187(5)	0.5×4.75	0.5	4.75	2.3	4.3	20	10
BLVB2-187(8)	0.8×4.75	0.8	4.75	2.3	4.3	19	
BLVB2-250	0.8×6.35	0.4*2	6.35	2.3	4.3	21	

Item No	NEMA-TAB mm	Thickness mm	DIMENSION				
			B mm	dφ mm	Dφ mm	L mm	H mm
BLVB5.5-250	0.8×6.35	0.4*2	6.35	3.4	5.7	25	13.5



Insulated Butt Splice Terminal BF Series

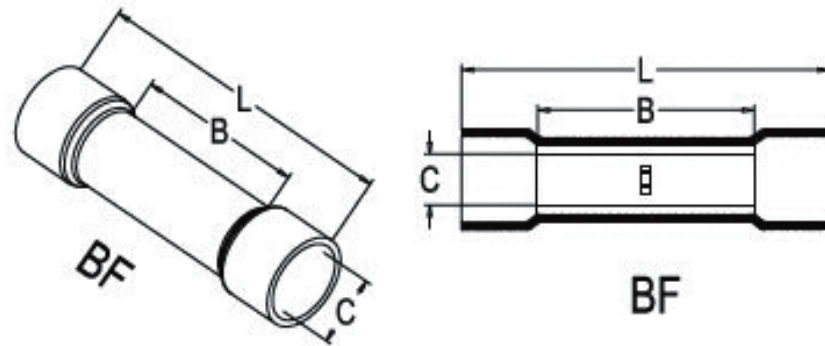

Specification

- Material: Copper, PVC jacket.
- Working Temperature: -40°C to 85°C heat resistant
- Certificates: UL, CE, RoHS


Features

- Long anti-rust time, no sharp corners, excellent conductivity, Better durability of PVC jacket.



BF Insulated Butt Splice Terminals Standard style							
Item No	Conduct square		DIMENSION			Imax	INSULATION COLOR
	A.W.G	mm ²	B	C	L		
			mm	mm	mm		
BF1.25	22 ~ 16	0.5 ~ 1.5	15	1.7	26	19A	Red
BF2	16 ~ 14	1.5 ~ 2.5	15	2.3	26	27A	Blue
BF5.5	12 ~ 10	4 ~ 6	15	3.4	26	48A	Yellow
BF8	#8	6 ~ 10	21	4.5	32	62A	Red
BF14	#6	10 ~ 16	26	5.8	42	88A	Blue
BF22	#4	16 ~ 25	29	7.7	50	115A	Yellow
BF38	#2	35 ~ 50	32	9.4	55	160A	Red
SHORT BUTT Short form style							
Item No	Conduct square		DIMENSION			Imax	INSULATION COLOR
	A.W.G	mm ²	B	C	L		
			mm	mm	mm		
BFS1.25	22 ~ 16	0.5 ~ 1.5	8	1.7	16	19A	Red
BFS2	16 ~ 14	1.5 ~ 2.5	8	2.3	16	27A	Blue
BFS5.5	12 ~ 10	4 ~ 6	8.5	3.4	20.5	48A	Yellow

Non-Insulated Short Butt Terminal BC Series

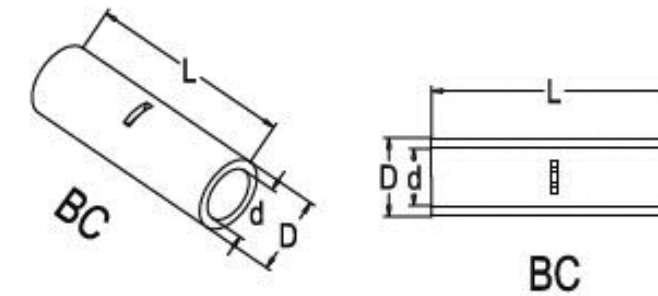

Specification

- Material: Copper
- Working Temperature: -40°C to 85°C heat resistant
- Certificates: UL, CE, RoHS


Features

- Long anti-rust time, no sharp corners, excellent conductivity, Better durability of PVC jacket.



Item No	Conduct square		DIMENSION			Imax
	A.W.G	mm ²	L	dφ	Dφ	
			mm	mm	mm	
BC-1.25	22~16	0.5~1.5	15	2.1	3.7	19A
BC-2	16~14	1.5~2.5	15	3	4	27A
BC-3.5	12~14	2.5~4	15	3.5	4.8	37A
BC-5.5	12~10	4~6	15	4.1	5.5	48A

Non-Insulated Chip-shaped Terminal BDBN Series

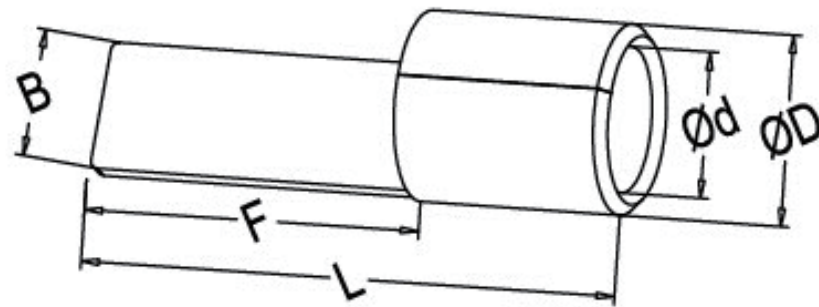

Specification

- Material: Copper
- Working Temperature: -40°C to 85°C heat resistant
- Certificates: UL, CE, RoHS

Features


- Long anti-rust time, no sharp corners, excellent conductivity, Better durability of PVC jacket.



Insulated square: 0.5 ~ 1.5mm ² (AWG22 ~ 16)Max. current: I _{max} =19A					
Item No	DIMENSION				
	B	L	F	D	d
	mm	mm	mm	mm	mm
BDBN1.25-10	2.3	14.8	10	3.4	1.7
BDBN1.25-11	3	15.8	11		
BDBN1.25-14	3	18.8	14		
BDBN1.25-18	2.3	22.8	18		

Insulated square：1.5 ~ 2.5mm ² (AWG16 ~ 14)Max. current: I _{max} =19A					
Item No	DIMENSION				
	B	L	F	D	d
	mm	mm	mm	mm	mm
BDBN2-9	2.3	13.8	9	4.1	2.3
BDBN2-18	2.3	22.8	18		
Insulated square：4 ~ 6mm ² (AWG12 ~ 10)Max. current: I _{max} =48A					
Item No	DIMENSION				
	B	L	F	D	d
	mm	mm	mm	mm	mm
BDBN5.5-10	2.8	14.8	13	5.6	3.4
BDBN5.5-14	4.5	21			
BDBN5.5-18	4.5	23			
BDBN8-14	5	22.5	14	7.2	4.5
BDBN14-16	6	30.6	16	9	6.5
Insulated square：6 ~ 10mm ² (AWG8)Max. current: I _{max} =62A					
Item No	DIMENSION				
	B	L	F	D	d
	mm	mm	mm	mm	mm
BDBN8-14	5	22.5	14	7.2	4.5
Insulated square：10 ~ 16mm ² (AWG6)Max. current: I _{max} =88A					
Item No	DIMENSION				
	B	L	F	D	d
	mm	mm	mm	mm	mm
BDBN14-16	6	30.6	16	9	6.5

Insulated Chip-shaped Terminal BDBF Series

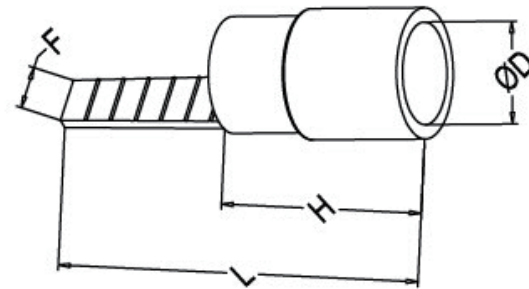

Specification

- Material: Copper, PVC jacket.
- Working Temperature: -40°C to 85°C heat resistant
- Certificates: UL, CE, RoHS


Features

- Long anti-rust time, no sharp corners, excellent conductivity, Better durability of PVC jacket.



Insulated square: 0.5 ~ 1.5mm²(AWG22 ~ 16)Max. current: I _{max} =19A					
Item No	DIMENSION				Color
PVC	Fφ	L	H	Dφ	Red
BDBF1.25-10	2.3	20	11	4	
BDBF1.25-11	3	21	11	4	
BDBF1.25-14	3	24	11	4	
BDBF1.25-18	2.2	28	11	4	
Insulated square: 1.5 ~ 2.5mm²(AWG16 ~ 14)Max. current: I _{max} =19A					
Item No	DIMENSION				Color
PVC	Fφ	L	H	Dφ	Blue
BDBF2-10	2.4	19	11	4.5	
BDBF2-14	2.4	24	11	4.5	
BDBF2-18	2.4	28	11	4.5	
Insulated square: 4 ~ 6mm²(AWG12 ~ 10)Max. current: I _{max} =48A					
Item No	DIMENSION				Color
PVC	Fφ	L	H	Dφ	Yellow
BDBF5.5-10	2.8	22.5	13.5	6.4	
BDBF5.5-14	4.5	26.5	13.5	6.4	
BDBF5.5-18	4.5	30.5	13.5	6.4	

Insulated Piggyback Terminal BMF Series

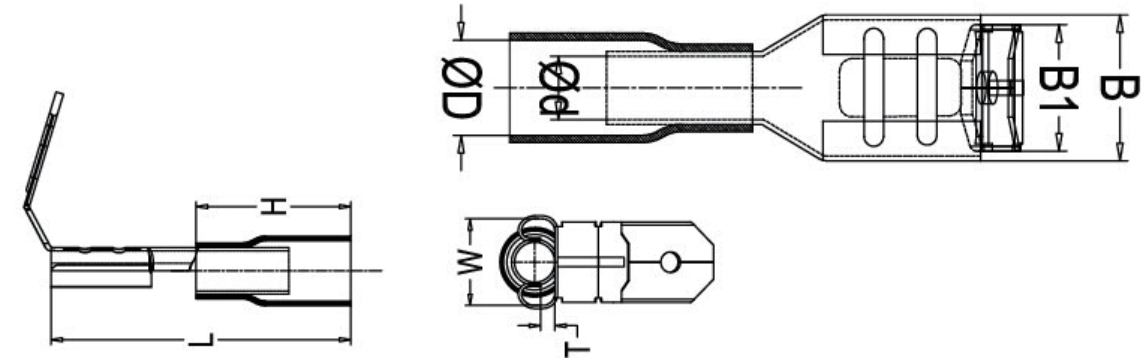

Specification

- Material: Copper, PVC jacket.
- Working Temperature: -40°C to 85°C heat resistant
- Certificates: UL, CE, RoHS


Features

- Long anti-rust time, no sharp corners, excellent conductivity, Better durability of PVC jacket.



Insulated square: 0.5 ~ 1.5mm ² (AWG22 ~ 16)Max. current: I _{max} =10A								
Item No	NEMA-TAB	DIMENSION						
	T*W	B	B1	H	Dφ	dφ	L	Red
	mm	mm	mm	mm	mm	mm	mm	
BMF1.25-250	0.8×6.35	7.4	6.3	10	3.8	1.7	21.5	
Insulated square: 1.5 ~ 2.5mm ² (AWG16 ~ 14)Max. current: I _{max} =15A								
Item No	NEMA-TAB	DIMENSION						
	T*W	B	B1	H	Dφ	dφ	L	Blue
	mm	mm	mm	mm	mm	mm	mm	
BMF2-250	0.8×6.35	7.4	6.3	10	4.3	2.3	21.5	
Insulated square: 4 ~ 6mm ² (AWG12 ~ 10)Max. current: I _{max} =24A								
Item No	NEMA-TAB	DIMENSION						
	T*W	B	B1	H	Dφ	dφ	L	Yellow
	mm	mm	mm	mm	mm	mm	mm	
BMF5.5-250	0.8×6.35	7.4	6.3	13	5.7	3.4	25	

Non-Insulated Terminal PIN Series

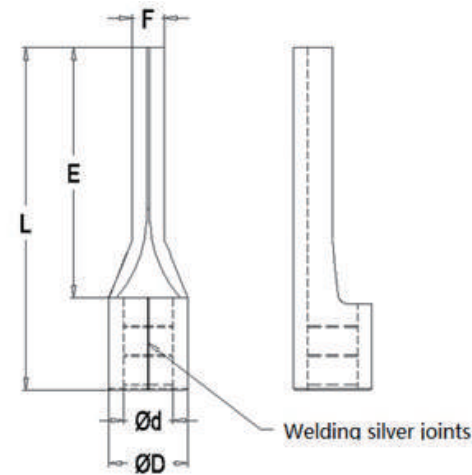

Specification

- Material: Copper
- Working Temperature: -40°C to 85°C heat resistant
- Certificates: UL, CE, RoHS

Features

- Long anti-rust time, no sharp corners, excellent conductivity, Better durability of PVC jacket.




Insulated square: 0.5 ~ 1.5mm ² (AWG22 ~ 16) Max. current: I _{max} =19A					
Item No	DIMENSION				
	Fφ	L	E	Dφ	dφ
	mm	mm	mm	mm	mm
PIN1.25-9	1.9	13.8	9	3.4	1.7
PIN1.25-10	1.9	14.8	10		
PIN1.25-12	1.9	16.8	12		
PIN1.25-13	1.9	17.8	13		
PIN1.25-18	1.9	22.8	18		

Insulated square: 1.5 ~ 2.5mm ² (AWG16 ~ 14) Max. current: I _{max} =27A					
Item No	DIMENSION				
	Fφ	L	E	Dφ	Cφ
	mm	mm	mm	mm	mm
PIN2-9	1.9	13.8	9	4.1	2.3
PIN2-10	1.9	14.8	10		
PIN2-12	1.9	16.8	12		
PIN2-13	1.9	17.8	13		
PIN2-18	1.9	22.8	18		
Insulated square: 2.5 ~ 4mm ² (AWG14 ~ 12) Max. current: I _{max} =37A					
Item No	DIMENSION				
	Fφ	L	E	Dφ	Cφ
	mm	mm	mm	mm	mm
PIN3.5-10	2.8	14.8	10	5	3
PIN3.5-13	2.8	19.8	13	5	3
Insulated square: 4 ~ 6mm ² (AWG12 ~ 10) Max. current: I _{max} =48A					
Item No	DIMENSION				
	Fφ	L	E	Dφ	Cφ
	mm	mm	mm	mm	mm
PIN5.5-13	2.8	19.8	13	5.6	3.4



Insulated Terminal PINF Series

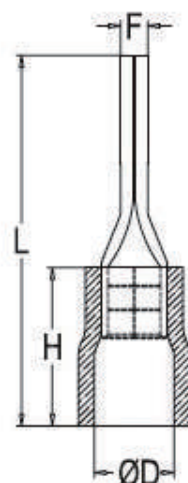

Specification

- Material: Copper, PVC jacket
- Working Temperature: -40°C to 85°C heat resistant
- Certificates: UL, CE, RoHS

Features

- Long anti-rust time, no sharp corners, excellent conductivity, Better durability of PVC jacket.



Insulated square: 0.5 ~ 1.5mm ² (AWG22 ~ 16)Max. current: I _{max} =19A						
Item No		DIMENSION				Color
PVC	Nylon	Fφ	L	H	Dφ	
PINF1.25-9	PINF1.25-9N	1.9	19	11	4	Red
PINF1.25-10	PINF1.25-10N	1.9	20	11	4	
PINF1.25-12	PINF1.25-12N	1.9	22	11	4	
PINF1.25-13	PINF1.25-13N	1.9	23	11	4	
PINF1.25-18	PINF1.25-18N	1.9	28	11	4	

Insulated square: 1.5 ~ 2.5mm²(AWG16 ~ 14)Max. current: I_{max}=27A

Item No		DIMENSION				Color
PVC	Nylon	Fφ	L	H	Dφ	
PINF2-9	PINF2-9N	1.9	19	11	4.5	Blue
PINF2-10	PINF2-10N	1.9	20	11	4.5	
PINF2-12	PINF2-12N	1.9	22	11	4.5	
PINF2-13	PINF2-13N	1.9	23	11	4.5	
PINF2-18	PINF2-18N	1.9	28	11	4.5	

Insulated square: 2.5 ~ 4mm²(AWG14 ~ 12)Max. current: I_{max}=37A

Item No		DIMENSION				Color
PVC	Nylon	Fφ	L	H	Dφ	
PINF3.5-10	PINF3.5-10N	2.8	20.5	13.5	6.4	Blue
PINF3.5-13	PINF3.5-13N	2.8	25.5	13.5	6.4	

Insulated square: 4 ~ 6mm²(AWG12 ~ 10)Max. current: I_{max}=48A

Item No		DIMENSION				Color
PVC	Nylon	Fφ	L	H	Dφ	
PINF5.5-13	PINF5.5-13N	2.8	25.5	13.5	6.4	Yellow



Insulated Fork Spade Terminal BEYF Series




Specification

- Material: Copper, PVC jacket
- Working Temperature: -40°C to 85°C heat resistant
- Certificates: UL, CE, RoHS

Features


- Long anti-rust time, no sharp corners, excellent conductivity, Better durability of PVC jacket.

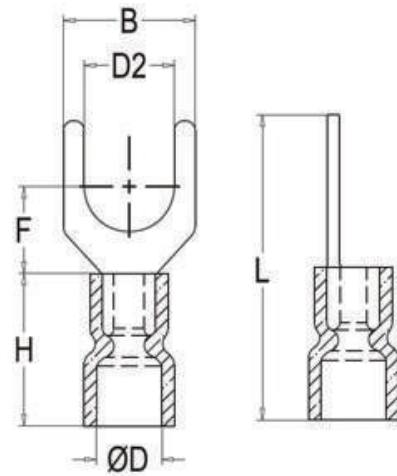

Item No.	AWG/mm ²	d2	B	L	F	H	Dφ	Color
BEYF1.25-3	22-16 0.5-1.5 19A 1000PCS	3.2mm	5.7	21.2	6.5	10	4.3	Red
BEYFS1.25-3.5		3.7mm	5.7	21.2	6.5			
BEYFL1.25-3.5		3.7mm	6.4	21.2	6.5			
BEYFS1.25-4		4.3mm	6.4	21.2	6.5			
BEYFM1.25-4		4.3mm	7.2	21.2	6.5			
BEYFL1.25-4		4.3mm	8.1	21.2	6.5			
BEYFS1.25-5		5.3mm	8.1	21.2	6.5			
BEYFL1.25-5		5.3mm	9.5	21.2	6.5			
BEYFS1.25-6		6.5mm	9.5	21.2	6.5			
BEYFL1.25-6		6.5mm	12	27.2	11			

Item No.	AWG/mm ²	d2	B	L	F	H	Dφ	Color
BEYF2-3	16-14 1.5-2.5 27A 1000PCS	3.2mm	5.7	21.2	6.5	10	4.9	Blue
BEYFS2-3.5		3.7mm	5.7	21.2	6.5			
BEYFL2-3.5		3.7mm	6	21.2	6.5			
BEYFS2-4		4.3mm	6.4	21.2	6.5			
BEYFM2-4		4.3mm	7.2	21.2	6.5			
BEYFL2-4		4.3mm	8.1	21.2	6.5			
BEYFS2-5		5.3mm	8.1	21.2	6.5			
BEYFL2-5		5.3mm	9.5	21.2	6.5			
BEYFS2-6		6.5mm	9.5	21.2	6.5			
BEYFL2-6		6.5mm	12	27.2	11			
BEYF3.5-3	12-14 2.5-4 37A 500PCS	3.2mm	5.7	24.8	7	13.5	6.2	Black
BEYF3.5-4		4.3mm	8	24.8	7			
BEYF3.5-5		5.3mm	8	24.8	7			
BEYF3.5-6		6.5mm	12	28	12.1			
BEYF5.5-3.5	12-10 '4-6 48A 500PCS	3.7mm	8.3	25.2	7.5	13.5	6.7	Yellow
BEYFS5.5-4		4.3mm	8.3	25.2	7.5			
BEYFL5.5-4		4.3mm	9	26	7.5			
BEYF5.5-5		5.3mm	9	26	7.5			
BEYFS5.5-6		6.5mm	9	26	7.5			
BEYFL5.5-6		6.5mm	12	31.2	12			
BEYF5.5-8		8.4mm	14	30	11.5			

Insulated Ring Terminal BERF Series

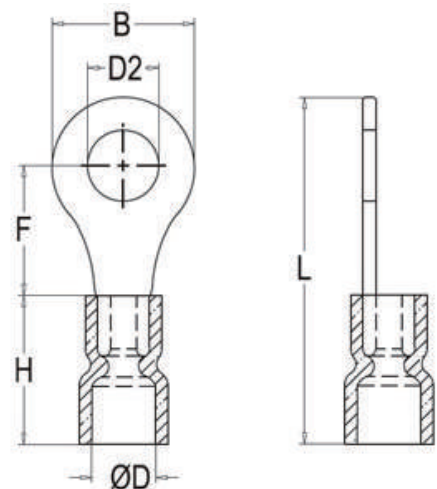

Specification

- Material: Copper, PVC jacket
- Working Temperature: -40°C to 85°C heat resistant
- Certificates: UL, CE, RoHS

Features


- Long anti-rust time, no sharp corners, excellent conductivity, Better durability of PVC jacket.



Item No.	AWG/mm ²	d2	B	L	F	H	Dφ	Color
BERF1.25-3	22-16 0.5-1.5 19A 1000PCS	3.2mm	5.7	17.8	4.95	10	4.3	Red
BERFS1.25-3.5		3.7mm	5.7	17.8	4.95			
BERFM1.25-3.5		3.7mm	6.6	20.1	6.3			
BERFL1.25-3.5		3.7mm	8	21.5	7			
BERFS1.25-4		4.3mm	6.6	20.1	6.3			
BERFL1.25-4		4.3mm	8	21.5	7			
BERF1.25-5		5.3mm	8	21.5	7			
BERFL1.25-5		5.3mm	9.8	23	8.5			
BERFS1.25-6		6.5mm	9.8	23	8.5			
BERF1.25-6		6.5mm	11.6	27.5	11.1			
BERF1.25-8		8.4mm	11.6	27.5	11.1			
BERF1.25-10		10.5mm	13.6	31.6	13.9			
BERF1.25-12		13.0mm	19.2	36	16.5			

Item No.	AWG/mm ²	d2	B	L	F	H	Dφ	Color
BERF2-3	16-14 1.5-2.5 27A 1000PCS	3.2mm	6.6	17.8	4.3	10	4.9	Blue
BERFS2-3.5		3.7mm	6.6	17.8	4.3			
BERFM2-3.5		3.7mm	6.6	21	7			
BERFL2-3.5		3.7mm	8.5	22.5	7.75			
BERFS2-4		4.3mm	6.6	19.5	6.5			
BERFL2-4		4.3mm	8.5	22.5	7.75			
BERFS2-5		5.3mm	8.5	22.5	7.75			
BERFL2-5		5.3mm	9.5	22.5	7.25			
BERF2-6		6.5mm	12	27.6	11			
BERF2-8		8.4mm	12	27.6	11			
BERF2-10		10.5mm	14	31	13.9			
BERF2-12		13.0mm	19.2	36.5	16.5			
BERF3.5-4	12-14 2.5-4 37A 500PCS	4.3mm	8	24.5	7.7	13.5	6.7	Black
BERFS3.5-5		5.3mm	8	24.5	7.7			
BERFL3.5-5		5.3mm	12	27.9	7.7			
BERF3.5-6		6.5mm	12	27.9	7.7			
BERF3.5-8		8.4mm	15	32	13.5			
BERF3.5-10		10.5mm	15	32	13.5			
BERF5.5-3.5	12-10 4-6 48A 500PCS	3.7mm	7.2	21.4	5.9	13.5	6.7	Yellow
BERFS5.5-4		4.3mm	7.2	21.4	5.9			
BERFL5.5-4		4.3mm	9.5	26.5	8.3			
BERF5.5-5		5.3mm	9.5	26.5	8.3			
BERF5.5-6		6.5mm	12	31	13			
BERF5.5-8		8.4mm	15	33.7	13.7			
BERF5.5-10		10.5mm	15	33.7	13.7			
BERF5.5-12		13.0mm	19.2	38.1	16			

Insulated Female Terminal BPV Series

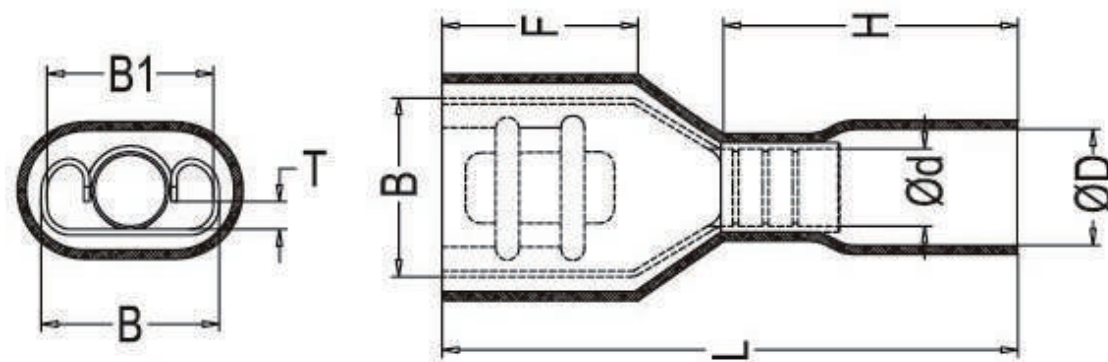

Specification

- Material: Copper, PVC jacket.
- Working Temperature: -40°C to 85°C heat resistant
- Certificates: UL, CE, RoHS


Features

- Long anti-rust time, no sharp corners, excellent conductivity, Better durability of PVC jacket.



Insulated square: 0.5 ~ 1.5mm ² (AWG22 ~ 16)Max. current: I _{max} =10A							
Item No.	NEMA-TAB	DIMENSION					
	T*B1	B	Dφ	dφ	L	F	H
	mm	mm	mm	mm	mm	mm	mm
BPV1.25-187(5)	0.5×4.75	5.6	3.8	1.7	20	6	10
BPV1.25-187(8)	0.8×4.75	5.6	3.8	1.7	20	6	10
BPV1.25-250	0.8×6.35	7.4	3.8	1.7	23.2	7.8	10
Insulated square: 1.5 ~ 2.5mm ² (AWG16 ~ 14)Max. current: I _{max} =15A							
Item No.	NEMA-TAB	DIMENSION					
	T*B1	B	Dφ	dφ	L	F	H
	mm	mm	mm	mm	mm	mm	mm
BPV2-187(5)	0.5×4.75	5.6	4	2.3	20	6	10
BPV2-187(8)	0.8×4.75	5.6	4	2.3	20	6	10
BPV2-250	0.8×6.35	7.4	4	2.3	23.5	7.8	10
Insulated square: 4 ~ 6mm ² (AWG12 ~ 10)Max. current: I _{max} =24A							
Item No.	NEMA-TAB	DIMENSION					
	T*B1	B	Dφ	dφ	L	F	H
	mm	mm	mm	mm	mm	mm	mm
BPV5.5-250	0.8×6.35	7.4	5.7	3.4	23.5	7.8	13

Insulated Female Terminal PNA Series

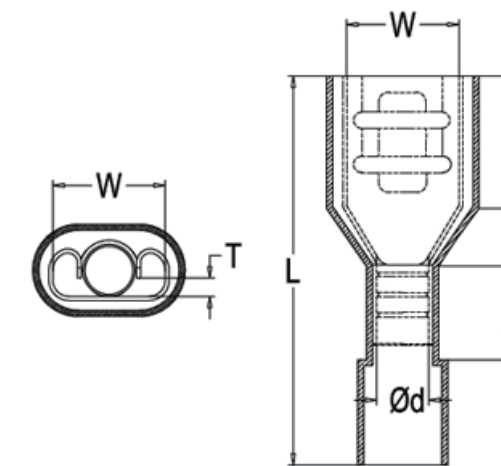

Specification

- Material: Copper, PVC jacket.
- Working Temperature: -40°C to 85°C heat resistant
- Certificates: UL, CE, RoHS


Features

- Long anti-rust time, no sharp corners, excellent conductivity.



Insulated square: 0.5 ~ 1.5mm ² (AWG22 ~ 16) Max. current: I _{max} = 10A							
Item No.	NEMA TAB	DIMENSION					Color
	T×W mm	W mm	F mm	E mm	dφ mm	L mm	
PN1.25-110A	0.8×2.8	2.8	6.5	5	1.7	19.5	Red
PN1.25-187A	0.8×4.8	4.8	6.5	5	1.7	20	
PN1.25-250A	0.8×6.35	6.6	8	5	1.7	22	
Insulated square: 1.5~2.5mm ² (AWG16~14) Max. current: I _{max} =15A							
Item No.	NEMA TAB	DIMENSION					Color
	T×W mm	W mm	F mm	E mm	dφ mm	L mm	
PN2-187A	0.8×4.8	4.8	6.5	5	2.3	20	Blue
PN2-250A	0.8×6.35	6.6	8	5	2.3	22	
Insulated square: 4~6mm ² (AWG12~10) Max. current: I _{max} =24A							
Item No.	NEMA TAB	DIMENSION					Color
	T×W mm	W mm	F mm	E mm	dφ mm	L mm	
PN5.5-250A	0.8×6.35	6.6	8	6	3.4	25.5	Yellow

Insulated Male Terminal PNB Series

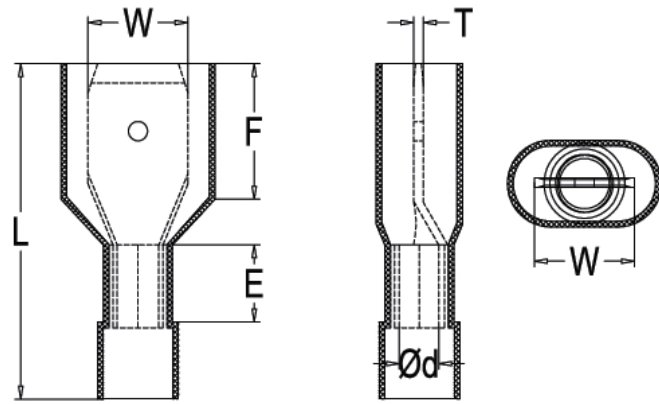

Specification

- Material: Copper, Nylon jacket.
- Working Temperature: -40°C to 105°C heat resistant
- Certificates: UL, CE, RoHS


Features

- Long anti-rust time, no sharp corners, excellent conductivity.



Insulated square: 0.5 ~ 1.5mm ² (AWG22 ~ 16) Max. current: I _{max} = 10A							
Item No.	NEMA TAB T×W mm	DIMENSION					Color
		W mm	F	E	dφ	L	
PN 1.25-250B	0.8×6.35	6.35	9	5	1.7	24	Red
Insulated square: 1.5 ~ 2.5mm ² (AWG16 ~ 14) Max. current: I _{max} = 15A							
Item No.	NEMA TAB T×W	DIMENSION					Color
		W	F	E	dφ	L	
PN 2-250B	0.8×6.35	6.4	9	5	2.3	24	Blue
Insulated square: 4 ~ 6mm ² (AWG12 ~ 10) Max. current: I _{max} = 24A							
Item No.	NEMA TAB T×W	DIMENSION					Color
		W	F	E	dφ	L	
PN5.5-250B	0.8×6.35	6.4	9	6	3.4	25	Yellow

Nylon Insulated Butt Splice Terminal BN Series

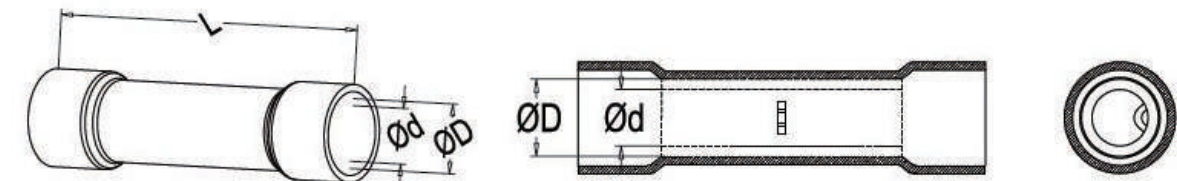


Specification

- Material: Copper, Nylon jacket.
- Working Temperature: Maximum pressure: 105 °C 600V
- Maximum current:
26-22 A.W.G: 9A
22-16 A.W.G: 19A
16-14 A.W.G: 27A
12-10 A.W.G: 48A



Item No.	DIMENSION(mm)			AWG	mm ²	Max. current	INSULATION COLOR
	L	DΦ	dΦ				
BN-0.5	20	2	1.3	26-22	0.2-0.5	9A	Yellow
BN-1.25	27.3	3.2	1.7	22-16	0.5-1.5	19A	Red
BN-2.0	27.3	3.8	2.3	16-14	1.5-2.5	27A	Blue
BN-5.5	27.3	5.3	3.4	12-10	4-6	48A	Yellow

Non-Insulated Cord End Terminal BEN Series

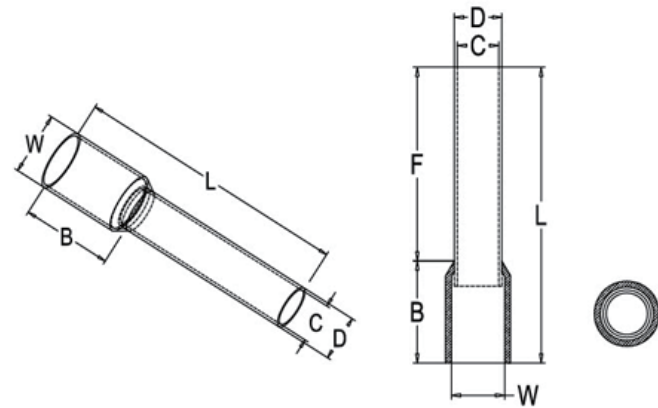

Specification

- Material: Copper
- Working Temperature: -40°C to 85°C heat resistant
- Certificates: UL, CE, RoHS

Features


- Long anti-rust time, no sharp corners, excellent conductivity, Better durability of PVC jacket.



Item No.	DIMENSION				Insulated square	
	L	D	C	W	A.W.G	mm ²
	mm	mm	mm	mm		
BEN0.5-6	6	1.3	1	1.7	#22	0.5
BEN0.5-8	8	1.3	1	1.7	#22	0.5
BEN0.5-10	10	1.3	1	1.7	#22	0.5
BEN0.5-12	12	1.3	1	1.7	#22	0.5
BEN0.75-6	6	1.5	1.2	1.9	#20	0.75
BEN0.75-8	8	1.5	1.2	1.9	#20	0.75
BEN0.75-10	10	1.5	1.2	1.9	#20	0.75
BEN0.75-12	12	1.5	1.2	1.9	#20	0.75
BEN1.0-6	6	1.7	1.4	2.2	#18	1
BEN1.0-8	8	1.7	1.4	2.2	#18	1
BEN1.0-10	10	1.7	1.4	2.2	#18	1
BEN1.0-12	12	1.7	1.4	2.2	#18	1

Item No.	DIMENSION				Insulated square	
	L	D	C	W	A.W.G	mm ²
	mm	mm	mm	mm		
BEN1.5-8	8	2	1.7	2.5	#16	1.5
BEN1.5-10	10	2	1.7	2.5	#16	1.5
BEN1.5-12	12	2	1.7	2.5	#16	1.5
BEN1.5-18	18	2	1.7	2.5	#16	1.5
BEN2.5-8	8	2.5	2.2	3.3	#14	2.5
BEN2.5-10	10	2.5	2.2	3.3	#14	2.5
BEN2.5-12	12	2.5	2.2	3.3	#14	2.5
BEN2.5-18	18	2.5	2.2	3.3	#14	2.5
BEN4.0-9	9	3.2	2.8	3.9	#12	4
BEN4.0-12	12	3.2	2.8	3.9	#12	4
BEN4.0-18	18	3.2	2.8	3.9	#12	4
BEN6.0-10	10	3.9	3.5	4.8	#10	6
BEN6.0-12	12	3.9	3.5	4.8	#10	6
BEN6.0-15	15	3.9	3.5	4.8	#10	6
BEN6.0-18	18	3.9	3.5	4.8	#10	6
BEN10-12	12	4.9	4.5	5.8	#7	10
BEN10-15	15	4.9	4.5	5.8	#7	10
BEN10-18	18	4.9	4.5	5.8	#7	10
BEN16-12	12	6.2	5.8	7.2	#5	16
BEN16-15	15	6.2	5.8	7.2	#5	16
BEN16-18	18	6.2	5.8	7.2	#5	16
BEN25-16	16	7.9	7.5	9.1	#4	25
BEN25-22	22	7.9	7.5	9.1	#4	25
BEN35-16	16	8.7	8.3	10.2	#2	35
BEN35-25	25	8.7	8.3	10.2	#2	35
BEN50-20	20	10.9	10.3	12.4	#1	50
BEN50-25	25	10.9	10.3	12.4	#1	50

Insulated Cord End Terminal BET Series

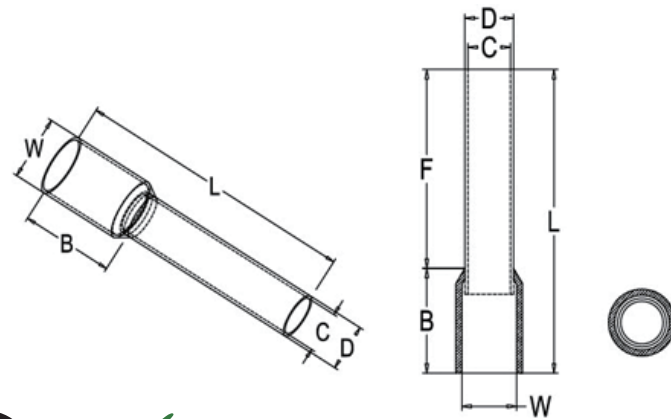

Specification

- Material: Copper
- Working Temperature: -40°C to 85°C heat resistant
- Certificates: UL, CE, RoHS

Features


- Long anti-rust time, no sharp corners, excellent conductivity, Better durability of PVC jacket.



Item No.	DIMENSION						Insulated		Color	
	F	L	W	B	D	C	A.W.G	mm5	Germany	France
	mm	mm	mm	mm	mm	mm				
BET0.25-6	6	10.4	2.5	4	1.05	0.75	#26	0.25	Blue	Purple
BET0.25-8	8	12.5								
BET0.3-6	6	10.5	2.5	4.5	1.1	0.8	#24	0.35	Blue	Purple
BET0.3-8	8	12.5								
BET0.5-6	6	12	2.6	6	1.3	1	#22	0.5	Orange	White
BET0.5-8	8	14								
BET0.5-10	10	16								
BET0.5-12	12	18								
BET0.75-6	6	12.4	2.8	6.4	1.5	1.2	#20	0.75	White	Blue
BET0.75-8	8	14.6								
BET0.75-10	10	16.4								
BET0.75-12	12	18.4								

Item No.	DIMENSION						Insulated		Color	
	F	L	W	B	D	C	A.W.G	mm5		
	mm	mm	mm	mm	mm	mm				
BET1.0-6	6	12.4	3	6.4	1.7	1.4	#18	1	Yellow	Red
BET1.0-8	8	14.6								
BET1.0-10	10	16.4								
BET1.0-12	12	18.4								
BET1.5-8	8	14.6	3.5	6.4	2	1.7	#16	1.5	Red	Black
BET1.5-10	10	16.4								
BET1.5-12	12	18.4								
BET1.5-18	18	24.4								
BET2.5-8	8	15.2	4	7	2.6	2.3	#14	2.5	Blue	Gray
BET2.5-10	10	17.2								
BET2.5-12	12	19								
BET2.5-18	18	25								
BET4.0-9	9	16.5	4.4	7.5	3.2	2.8	#12	4	Gray	Orange
BET4.0-12	12	19.5								
BET4.0-18	18	25.5								
BET6.0-10	10	18	6.3	8	3.9	3.5	#10	6	Black	Green
BET6.0-12	12	20								
BET6.0-18	18	26								
BET10-12	12	21.5	7.6	9.5	4.9	4.5	#7	10	Milk white	Brown
BET10-18	18	27.5								
BET16-12	12	22.2	8.8	10.2	6.2	5.8	#5	16	Green	Milk white
BET16-18	18	28.2								
BET25-16	16	29	11.2	13	7.9	7.5	#4	25	Brown	Black
BET25-22	22	35								
BET35-16	16	30	12.7	14	8.7	8.3	#2	35	Brown	
BET35-25	25	39								
BET50-20	20	36	15.3	16	10.9	10.3	#1	50	Olive Green	
BET50-25	25	41								
BET70-20	20	37	18.5	17	14.3	13.5	#2/0	70	Yellow	
BET70-25	25	42								
BET70-27	27	44								
BET95-25	25	44	20.3	19	15.3	14.5	#3/0	95	Red	
BET120-27	27	47.6	20	21	17.5	16.5	#4/4	120	Black	
BET120-32	32	52.6	23.4	21	17.5	16.5	#4/4	120		
BET150-25	25	50.6	16	25.6	20.6	19.6	250-	150	Yellow	
BET150-27	27	52.6	16	25.6	20.6	19.6	300m	150		
BET150-32	32	57.6	16	25.6	20.6	19.6	m	150		

Insulated Cord End Terminal BETN Series

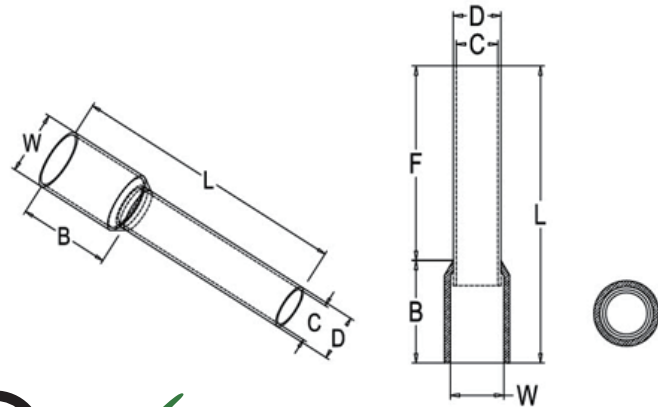

Specification

- Material: Copper
- Working Temperature: -40°C to 85°C heat resistant
- Certificates: UL, CE, RoHS

Features


- Long anti-rust time, no sharp corners, excellent conductivity, Better durability of PVC jacket.



Item No.	DIMENSION						Insulated		INSULATION COLOR	
	F	L	W	B	D	C	A.W.G	mm ²	Germany	France
	mm	mm	mm	mm	mm	mm				
BET0.25-6N	6	10	2.5	4	1.05	0.75	#26	0.25	Blue	Purple
BET0.25-8N	8	12								
BET0.3-6N	6	10.5	2.5	4	1.1	0.8	#24	0.35	Blue	Purple
BET0.3-8N	8	12.5								
BET0.5-6N	6	12	2.6	6	1.3	1	#22	0.5	Orange	White
BET0.5-8N	8	14								
BET0.5-10N	10	16								
BET0.5-12N	12	18								
BET0.75-6N	6	12.4	2.8	6.4	1.5	1.2	#20	0.75	White	Blue
BET0.75-8N	8	14.6								
BET0.75-10N	10	16.4								
BET0.75-12N	12	18.4								

Item No.	DIMENSION						Insulated		INSULATION	
	F	L	W	B	D	C	A.W.G	mm²	COLOR	
	mm	mm	mm	mm	mm	mm			Germany	France
BET1.0-6N	6	12.4	3	6.4	1.7	1.4	#18	1	Yellow	Red
BET1.0-8N	8	14.6								
BET1.0-10N	10	16.4								
BET1.0-12N	12	18.4								
BET1.5-8N	8	14.6	3.5	6.4	2	1.7	#16	1.5	Red	Black
BET1.5-10N	10	16.4								
BET1.5-12N	10	16.4								
BET1.5-18N	18	24.4								
BET2.5-8N	8	15.2	4	7	2.6	2.3	#14	2.5	Blue	Gray
BET2.5-10N	10	16								
BET2.5-12N	12	19								
BET2.5-18N	18	25								
BET4.0-9N	9	16.5	4.4	7.5	3.2	2.8	#12	4	Gray	Orange
BET4.0-12N	12	19.5								
BET4.0-18N	18	25.5								
BET6.0-10N	12	20	6.3	8	3.9	3.5	#10	6	Black	Green
BET6.0-12N	12	20								
BET6.0-18N	18	26								
BET10-12N	12	21.5	7.6	9.5	4.9	4.5	#7	10	Milk white	Brown
BET10-18N	18	27.5								
BET16-12N	12	22.2	8.8	10.2	6.2	5.8	#5	16	Green	Milk white
BET16-18N	18	28.2								
BET25-16N	16	29	11.2	13	7.9	7.5	#4	25	Brown	Black
BET25-22N	22	35								
BET35-16N	16	30	12.7	14	8.7	8.3	#2	35	Brown	Red
BET35-25N	25	39								
BET50-20N	20	36	15.3	16	10.9	10.3	#1/0	50	Olive Green	
BET50-25N	25	41								
BET70-20N	20	37	18.5	17	14.3	13.5	#2/0	70	Yellow	
BET70-25N	25	42								
BET70-27N	27	44								
BET95-25N	25	44	18.5	19	15.1	14.7	#3/0	95	Red	
BET120-27N	27	48								
BET120-32N	32	52.6	23.4	21	17.5	16.5	#4/0	120	Black	
BET150-25N	25	50.6								
BET150-27N	27	52.6	26	25.6	20.5	19.5	250-300mc	150	Yellow	
BET150-32N	32	57.6								

Insulated Twin Cord End Terminal BEW Series

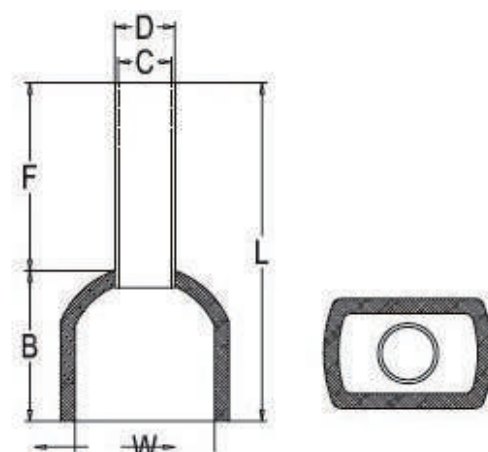

Specification

- Material: Copper, Nylon jacket.
- Working Temperature: -40°C to 105°C heat resistant
- Certificates: UL, CE, RoHS


Features

- Long anti-rust time, no sharp corners, excellent conductivity.



Item No.	DIMENSION						Insulated square mm ²	Color	
	F	L	W	B	DΦ	CΦ		France	Germany
BEW 0.5-8	8	15	5	7	1.8	1.5	2 x 0.5	White	White
BEW 0.75-8	8	15.8	5.3	7.8	2.1	1.8	2 x 0.75	Blue	Gray
BEW 0.75-10	10	17.8	5.3	7.8	2.1	1.8	2 x 0.75	Blue	Gray
BEW 1.0-8	8	16	5.3	8	2.4	2.1	2 x 1.0	Red	Red
BEW 1.0-10	10	18	5.3	8	2.4	2.1	2 x 1.0	Red	Red
BEW 1.5-8	8	16	6.2	8	2.6	2.3	2 x 1.5	Black	Yellow
BEW 1.5-12	12	20	6.2	8	2.6	2.3	2 x 1.5	Black	Yellow
BEW 2.5-10	10	19.8	7.8	9.8	3.3	2.9	2 x 2.5	Gray	Blue
BEW 2.5-12	12	21.8	7.8	9.8	3.3	2.9	2 x 2.5	Gray	Blue
BEW 4.0-12	12	22.2	8.5	10.2	4.2	3.8	2 x 4.0	Orange	Gray
BEW 6.0-14	14	25.2	9.5	11.2	5.3	4.9	2 x 6.0	Green	Yellow
BEW 10 - 14	14	26	12.6	12	6.9	6.5	2 x 10.0	Brown	Red
BEW 16 -14	14	30.3	19	16.3	8.7	8.3	2 x 16.0	Milk	Blue

Insulated Twin Cord End Terminal BEWN Series

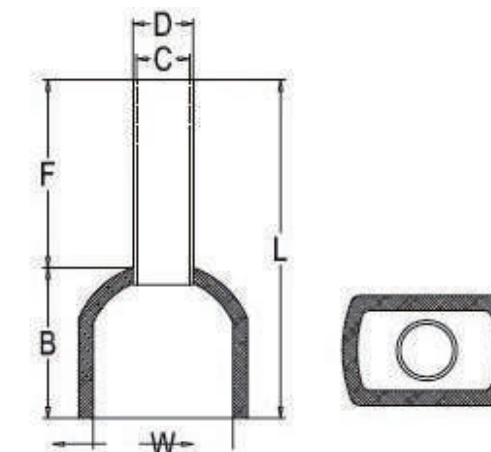


Specification

- Material: Copper, Nylon jacket.
- Working Temperature: -40°C to 105°C heat resistant
- Certificates: UL, CE, RoHS

Features


- Long anti-rust time, no sharp corners, excellent conductivity.

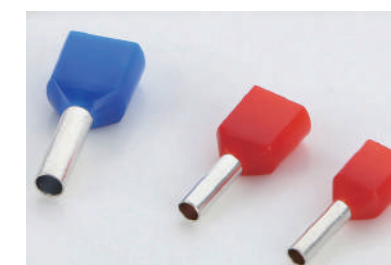

Limited W.T: 105°C Ui=300V Terminal material: Tin coated copper

Item No.	CONDUCTOR	DIMENSION (mm)						Color	
		F	L	W	B	DΦ	CΦ	Germany	France
BEW0.5-8N	2 x 0.5	8	14.5	8	6.5	1.8	1.5	White	White
BEW0.75-8N	2 x 0.75	8	14.7	8	6.7	2.1	1.8	Blue	Gray
BEW0.75-10N	2 x 0.75	10	16.7	10	6.7	2.1	1.8		
BEW1.0-8N	2 x 1.0	8	15.1	8	7.1	2.3	2	Red	Red
BEW1.0-10N	2 x 1.0	10	17.1	10	7.1	2.3	2		
BEW1.5-8N	2 x 1.5	8	15.5	8	7.2	2.6	2.3	Black	Yellow
BEW1.5-12N	2 x 1.5	12	19.5	12	7.5	2.6	2.3		
BEW2.5-10N	2 x 2.5	10	18.5	10	8.5	3.3	2.9	Gray	Blue
BEW2.5-13N	2 x 2.5	13	21.5	13	8.5	3.3	2.9		
BEW4.0-12N	2 x 4.0	12	23.1	12	11.1	4.2	3.8	Orange	Gray
BEW6.0-14N	2 x 6.0	14	26.1	14	12.1	5.3	4.9	Green	Yellow
BEW10 - 14N	2 x 10.0	14	26.6	14	12	6.9	6.5	Brown	Red
BEW16 -14N	2 x 16.0	14	31.3	8.9	17.3	8.7	8.3	Milk	Blue

Nylon Insulated Fork Spade Terminal BYFN Series

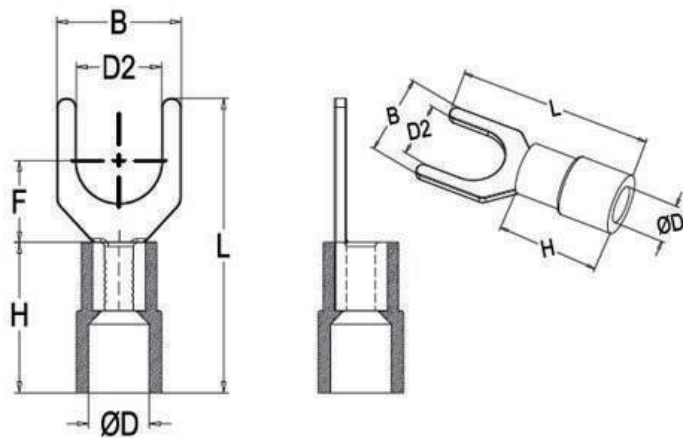

Specification

- Material: Copper, Nylon jacket. Halogen Free.
- Working Temperature: -40°C to 105°C heat resistant
- Certificates: UL, CE, RoHS

Features

- Long anti-rust time, no sharp corners, excellent conductivity. Halogen Free.

Size of cable: 0.5-1.5mm²(American standard 22-16) Max.Current=19A.Package:1000Pcs

Item No.	DIMENSION							color
	America	Dia. of bolt	B	L	F	H	D Φ	
	Bolt no.	D2	mm	mm	mm	mm	mm	
BYF1.25-3N	#4	3.2mm	5.7	22.2	6.5	11	4	Red
BYFS1.25-3.5N	#6	3.7mm	5.7	22.2	6.5			
BYFL1.25-3.5N	#6	3.7mm	6.4	22.2	6.5			
BYFS1.25-4N	#8	4.3mm	6.4	22.2	6.5			
BYFM1.25-4N	#8	4.3mm	7.2	22.2	6.5			
BYFL1.25-4N	#8	4.3mm	8.1	22.2	6.5			
BYFS1.25-5N	#10	5.3mm	8.1	22.2	6.5			
BYFL1.25-5N	#10	5.3mm	9.5	22.2	6.5			
BYFS1.25-6N	1/4	6.4mm	9.5	22.2	6.5			
BYFL1.25-6N	1/4	6.4mm	12	28.2	11			

Size of cable: 0.5-2.5mm²(American standard 16-14) Max.Current=27A.Package:1000Pcs

Item No.	DIMENSION							color
	America	Dia. of bolt	B	L	F	H	D Φ	
	Bolt no.	D2	mm	mm	mm	mm	mm	
BYF2-3N	#4	3.2mm	5.7	22.2	6.5	11	4.5	Blue
BYFS2-3.5N	#6	3.7mm	5.7	22.2	6.5			
BYFL2-3.5N	#6	3.7mm	6	22.2	6.5			
BYFS2-4N	#8	4.3mm	6.4	22.2	6.5			
BYFM2-4N	#8	4.3mm	7.2	22.2	6.5			
BYFL2-4N	#8	4.3mm	8.1	22.2	6.5			
BYFS2-5N	#10	5.3mm	8.1	22.2	6.5			
BYFL2-5N	#10	5.3mm	9.5	22.2	6.5			
BYFS2-6N	1/4	6.4mm	9.5	22.2	6.5			
BYFL2-6N	1/4	6.4mm	12	28.2	11			

Size of cable: 4-6mm²(American standard 12-10) Max.Current=37A.Package:500Pcs

Item No.	DIMENSION							color
	America	Dia. of bolt	B	L	F	H	D Φ	
	Bolt no.	D2	mm	mm	mm	mm	mm	
BYF3.5-3N	#4	3.2mm	5.7	25.7	7	13.4	6.4	Black
BYF3.5-4N	#8	4.3mm	8	25.7	7			
BYF3.5-5N	#10	5.3mm	5.3	25.7	7			
BYF3.5-6N	1/4	6.5mm	6.5	25.7	7			

Nylon Insulated Ring Terminal BRFN Series




Specification

- Material: Copper, Nylon jacket. Halogen Free.
- Working Temperature: -40°C to 105°C heat resistant
- Certificates: UL, CE, RoHS

Features

- Long anti-rust time, no sharp corners, excellent conductivity. Halogen Free.

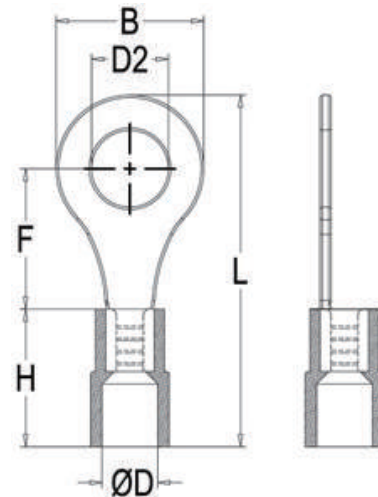

Insulated Size of cable: 0.5-1.5mm ² (AWG22-16) Max.Current=19A								
Item No .	DIMENSION							color
	America Bolt no.	Dia. of bolt d2	B mm	L mm	F mm	H mm	DΦ mm	
BRF1.25-3N	#4	3.2mm	5.5	18.5	5	11	4	Red
BRFS1.25-3.5N	#6	3.7mm	5.7	18.5	5			
BRFM1.25-3.5N	#6	3.7mm	6.6	20.4	6.3			
BRFL1.25-3.5N	#6	3.7mm	8	21.8	7			
BRFS1.25-4N	#8	4.3mm	6.6	20.4	6.3			
BRFL1.25-4N	#8	4.3mm	8	21.8	7			
BRFS1.25-5N	#10	5.3mm	8	21.8	7			
BRFL1.25-5N	#10	5.3mm	11.6	27.8	11			
BRFS1.25-6N	1/4	6.4mm	11.6	27.8	11			
BRF1.25-6N	1/4	6.4mm	11.6	27.8	11			
BRF1.25-8N	5/16	8.4mm	11.6	27.8	11			
BRF1.25-10N	3-8	10.5mm	13.6	31.5	13.9			
BRF1.25-12N	1-2	13.0mm	19.6	36.4	16			

Insulated Size of cable: 1.5-2.5mm ² (AWG 16-14) Max.Current=27A								
Item No .	DIMENSION							color
	America Bolt no.	Dia. of bolt d2	B mm	L mm	F mm	H mm	DΦ mm	
BRF2-3N	#4	3.2mm	6.6	18.8	4.8	11	4.5	Blue
BRFS2-3.5N	#6	3.7mm	6.6	18.8	4.8			
BRFM2-3.5N	#6	3.7mm	6.6	20.4	6.3			
BRFL2-3.5N	#6	3.7mm	8.5	22.8	7.4			
BRFS2-4N	#8	4.3mm	6.6	20.4	6.3			
BRFL2-4N	#8	4.3mm	8.5	22.8	7.8			
BRFS2-5N	#10	5.3mm	8.5	22.8	7.8			
BRFL2-5N	#10	5.3mm	9.5	22.8	7.3			
BRF2-6N	1/4	6.5mm	12	27.8	11			
BRF2-8N	5/16	8.4mm	12	27.8	11			
BRF2-10N	3-8	10.5mm	13.6	31.5	13.9			
BRF2-12N	1-2	13.0mm	19.2	36.4	16			

Insulated square: 2.5 ~ 4mm ² (AWG14 ~ 12)Max. current: I _{max} = 37A								
Item No .	DIMENSION							color
	America Bolt no.	Dia. of bolt d2	B mm	L mm	F mm	H mm	DΦ mm	
BRF3.5-4N	#8	4.3mm	8	24.5	7.7	13.5	6.4	Black
BRFS3.5-5N	#10	5.3mm	8	24.5	7.7			
BRFL3.5-5N	#10	5.3mm	12	27.9	7.7			
BRF3.5-6N	1/4	6.5mm	12	27.9	7.7			
BRF3.5-8N	5/16	8.4mm	15	32	13.5			
BRF3.5-10N	3-8	10.5mm	15	32	13.5			

Insulated Size of cable: 4-6mm ² (American standar 12-10) Max.Current=48A								
Item No .	DIMENSION							color
	America Bolt no.	Dia. of bolt d2	B mm	L mm	F mm	H mm	DΦ mm	
BRF5.5-3.5N	#6	3.7mm	7.2	22.7	6.1	13.5	6.4	Yellow
BRFS5.5-4N	#8	4.3mm	7.2	22.7	6.1			
BRFL5.5-4N	#8	4.3mm	9.5	26	8.3			
BRF5.5-5N	#10	5.3mm	9.5	26	8.3			
BRF5.5-6N	1/4	6.5mm	12	29.5	10.5			
BRF5.5-8N	5/16	8.4mm	15	34	13.3			
BRF5.5-10N	3-8	10.5mm	15	34	13.3			
BRF5.5-12N	1-2	13.0mm	19.2	38.6	16			

Stainless Steel Ball Lock Cable Tie BZ-C Series



Specification

- Material: Stainless Steel 304/316
- Working Temperature: -80°C to 538°C
- Flammability: Fireproof
- Color: Mettalic

Features

- UV-resistant

Item No.	Width		Length		Thickness		Max.Bundle Dia.		Min.Bundle Dia.		Min. Tensile Strength	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	N	lbs
BZ-C 4.6x100	4.6	0.18	100	3.9	0.26	0.010	25	1.00	12.7	0.5	1100	250
BZ-C 4.6x150			150	5.9			37	1.46				
BZ-C 4.6x200			200	7.9			50	1.97				
BZ-C 4.6x250			250	9.8			63	2.50				
BZ-C 4.6x300			300	11.8			76	3.00				
BZ-C 4.6x350			350	13.8			89	3.51				
BZ-C 4.6x400			400	15.7			102	4.00				
BZ-C 4.6x450			450	17.7			115	4.50				
BZ-C 4.6x500			500	19.7			128	5.00				
BZ-C 4.6x550			550	21.7			141	5.56				
BZ-C 4.6x650			650	25.6			167	6.58				
BZ-C 4.6x700			700	27.6			179	7.05				
BZ-C 4.6x800			800	31.5			193	7.60				
BZ-C 4.6x900			900	35.4			200	7.87				
BZ-C 4.6x1000			1000	39.4			206	8.12				
BZ-C 4.6x1100			1100	43.3			278	10.94				

Item No.	Width		Length		Thickness		Max.Bundle Dia.		Min.Bundle Dia.		Min. Tensile Strength	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	N	lbs
BZ-C 7.9x150	7.9	0.31	150	5.9	0.26	0.010	37	1.46	12.7	0.50	1500	340
BZ-C 7.9 x 200			200	7.9			50	1.97				
BZ-C 7.9x250			250	9.8			63	2.50				
BZ-C 7.9x300			300	11.8			76	3.00				
BZ-C 7.9x350			350	13.8			89	3.50				
BZ-C 7.9x400			400	15.7			102	4.00				
BZ-C 7.9x500			500	19.7			128	5.00				
BZ-C 7.9x600			600	23.6			154	6.07				
BZ-C 7.9x800			800	31.5			193	7.60				
BZ-C 7.9x1000			1000	39.4			206	8.12				
BZ-C 10x300	10	0.39	300	11.8	0.26	0.010	76	3.00	12.7	0.50	2100	480
BZ-C 10x350			350	13.8			89	3.50				
BZ-C 10x400			400	15.7			102	4.00				
BZ-C 10x500			500	19.7			128	5.00				
BZ-C 10x600			600	23.6			154	6.07				
BZ-C 10x800			800	31.5			193	7.60				
BZ-C 10x1000			1000	39.4			206	8.12				
BZ-C 12x350	12	0.47	350	13.8	0.35	0.014	78	3.07	25.4	1.00	3000	675
BZ-C 12x400			400	15.7			102	4.02				
BZ-C 12x500			500	19.7			128	5.04				
BZ-C 12x600			600	23.6			154	6.06				
BZ-C 12x750			750	29.5			188	7.40				
BZ-C 12x900			900	35.4			228	8.98				
BZ-C 12x1100			1100	43.3			278	10.94				
BZ-C 12.7x350	12.7	0.50	350	13.8	0.35	0.014	78	3.07	25.4	1.00	3200	720
BZ-C 12.7x400			400	15.7			102	4.02				
BZ-C 12.7x500			500	19.7			128	5.04				
BZ-C 12.7x600			600	23.6			154	6.06				
BZ-C 12.7x750			750	29.5			188	7.40				
BZ-C 12.7x900			900	35.4			228	8.98				
BZ-C 12.7x1100			1100	43.3			278	10.94				
BZ-CP 15x350	15	0.59	350	13.8	0.45	0.018	78	3.07	25.4	1.00	3400	770
BZ-CP 15x400			400	15.7			102	4.02				
BZ-CP 15x450			450	17.7			108	4.25				
BZ-CP 15x600			600	23.6			148	5.83				
BZ-CP 15x750			750	29.5			184	7.24				
BZ-CP 15x900			900	35.4			220	8.66				
BZ-CP 15x1100			1100	43.3			272	10.71				

Stainless Steel Ball Lock Cable Tie BZ-C Series



Specification

- Material: Stainless Steel 304/316
- Working Temperature: -80°C to 538°C
- Flammability: Fireproof
- Color: Mettalic

Features

- UV-resistant

Item No.	Width		Length		Thickness		Max.Bundle Dia.		Min.Bundle Dia.		Min. Tensile Strength	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	N	lbs
BZ-C 4.6x100	4.6	0.18	100	3.9	0.26	0.010	25	1.00	12.7	0.5	1100	250
BZ-C 4.6x150			150	5.9			37	1.46				
BZ-C 4.6x200			200	7.9			50	1.97				
BZ-C 4.6x250			250	9.8			63	2.50				
BZ-C 4.6x300			300	11.8			76	3.00				
BZ-C 4.6x350			350	13.8			89	3.51				
BZ-C 4.6x400			400	15.7			102	4.00				
BZ-C 4.6x450			450	17.7			115	4.50				
BZ-C 4.6x500			500	19.7			128	5.00				
BZ-C 4.6x550			550	21.7			141	5.56				
BZ-C 4.6x650			650	25.6			167	6.58				
BZ-C 4.6x700			700	27.6			179	7.05				
BZ-C 4.6x800			800	31.5			193	7.60				
BZ-C 4.6x900			900	35.4			200	7.87				
BZ-C 4.6x1000			1000	39.4			206	8.12				
BZ-C 4.6x1100			1100	43.3			278	10.94				

Item No.	Width		Length		Thickness		Max.Bundle Dia.		Min.Bundle Dia.		Min. Tensile Strength	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	N	lbs
BZ-C 7.9x150	7.9	0.31	150	5.9	0.26	0.010	37	1.46	12.7	0.50	1500	340
BZ-C 7.9 x 200			200	7.9			50	1.97				
BZ-C 7.9x250			250	9.8			63	2.50				
BZ-C 7.9x300			300	11.8			76	3.00				
BZ-C 7.9x350			350	13.8			89	3.50				
BZ-C 7.9x400			400	15.7			102	4.00				
BZ-C 7.9x500			500	19.7			128	5.00				
BZ-C 7.9x600			600	23.6			154	6.07				
BZ-C 7.9x800			800	31.5			193	7.60				
BZ-C 7.9x1000			1000	39.4			206	8.12				
BZ-C 10x300	10	0.39	300	11.8	0.26	0.010	76	3.00	12.7	0.50	2100	480
BZ-C 10x350			350	13.8			89	3.50				
BZ-C 10x400			400	15.7			102	4.00				
BZ-C 10x500			500	19.7			128	5.00				
BZ-C 10x600			600	23.6			154	6.07				
BZ-C 10x800			800	31.5			193	7.60				
BZ-C 10x1000			1000	39.4			206	8.12				
BZ-C 12x350	12	0.47	350	13.8	0.35	0.014	78	3.07	25.4	1.00	3000	675
BZ-C 12x400			400	15.7			102	4.02				
BZ-C 12x500			500	19.7			128	5.04				
BZ-C 12x600			600	23.6			154	6.06				
BZ-C 12x750			750	29.5			188	7.40				
BZ-C 12x900			900	35.4			228	8.98				
BZ-C 12x1100			1100	43.3			278	10.94				
BZ-C 12.7x350	12.7	0.50	350	13.8	0.35	0.014	78	3.07	25.4	1.00	3200	720
BZ-C 12.7x400			400	15.7			102	4.02				
BZ-C 12.7x500			500	19.7			128	5.04				
BZ-C 12.7x600			600	23.6			154	6.06				
BZ-C 12.7x750			750	29.5			188	7.40				
BZ-C 12.7x900			900	35.4			228	8.98				
BZ-C 12.7x1100			1100	43.3			278	10.94				
BZ-CP 15x350	15	0.59	350	13.8	0.45	0.018	78	3.07	25.4	1.00	3400	770
BZ-CP 15x400			400	15.7			102	4.02				
BZ-CP 15x450			450	17.7			108	4.25				
BZ-CP 15x600			600	23.6			148	5.83				
BZ-CP 15x750			750	29.5			184	7.24				
BZ-CP 15x900			900	35.4			220	8.66				
BZ-CP 15x1100			1100	43.3			272	10.71				

Stainless Steel Coated Cable Tie BZ-CP Series



- Specification
- Material: Stainless Steel 304/316
 - Working Temperature: -80°C to 150°C
 - Flammability: Fireproof
 - Color: Black
 - Coating: Polyester/Epoxy, Nylon 11

- Features
- UV-resistant

Item No.	Width		Length		Thickness		Max.Bundle Dia.		Min.Bundle		Min. Tensile	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	N	lbs
BZ-CP 4.6x100	4.6	0.18	100	3.9	0.35	0.014	25	1.00	12.7	0.50	900	200
BZ-CP 4.6x150			150	5.9			37	1.46				
BZ-CP 4.6x200			200	7.9			50	1.97				
BZ-CP 4.6x250			250	9.8			63	2.50				
BZ-CP 4.6 x 300			300	11.8			76	3.00				
BZ-CP 4.6x350			350	13.8			89	3.51				
BZ-CP 4.6x400			400	15.7			102	4.00				
BZ-CP 4.6x450			450	17.7			115	4.50				
BZ-CP 4.6x500			500	19.7			128	5.00				
BZ-CP 4.6x550			550	21.7			141	5.56				
BZ-CP 4.6x650			650	25.6			167	6.58				
BZ-CP 4.6 x 700			700	27.6			179	7.05				
BZ-CP 4.6x800			800	31.5			193	7.60				
BZ-CP 4.6x900			900	35.4			200	7.87				
BZ-CP 4.6x1000			1000	39.4			206	8.12				
BZ-CP 4.6x1100			1100	43.3			278	10.94				

Item No.	Width		Length		Thickness		Max.Bundle Dia.		Min.Bundle		Min. Tensile	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	N	lbs
BZ-CP 7.9x150	7.9	0.31	150	5.9	0.35	0.014	37	1.46	12.7	0.50	1200	270
BZ-CP 7.9 x 200			200	7.9			50	1.97				
BZ-CP 7.9x250			250	9.8			63	2.50				
BZ-CP 7.9x300			300	11.8			76	3.00				
BZ-CP 7.9x350			350	13.8			89	3.50				
BZ-CP 7.9x400			400	15.7			102	4.00				
BZ-CP 7.9x500			500	19.7			128	5.00				
BZ-CP 7.9x600			600	23.6			154	6.07				
BZ-CP 7.9x800			800	31.5			193	7.60				
BZ-CP 7.9x1000			1000	39.4			206	8.12				
BZ-CP 10x300	10	0.39	300	11.8	0.35	0.014	76	3.00	12.7	0.50	1700	390
BZ-CP 10x350			350	13.8			89	3.50				
BZ-CP 10x400			400	15.7			102	4.00				
BZ-CP 10x500			500	19.7			128	5.00				
BZ-CP 10x600			600	23.6			154	6.07				
BZ-CP 10x800			800	31.5			193	7.60				
BZ-CP 10x1000			1000	39.4			206	8.12				
BZ-CP 12x350	12	0.47	350	13.8	0.45	0.018	78	3.07	25.4	1.00	2200	500
BZ-CP 12x400			400	15.7			102	4.02				
BZ-CP 12x500			500	19.7			128	5.04				
BZ-CP 12x600			600	23.6			154	6.06				
BZ-CP 12x750			750	29.5			188	7.40				
BZ-CP 12x900			900	35.4			228	8.98				
BZ-CP 12x1100			1100	43.3			278	10.94				
BZ-CP 12.7x350	12.7	0.50	350	13.8	0.45	0.018	78	3.07	25.4	1.00	2800	630
BZ-CP 12.7x400			400	15.7			102	4.02				
BZ-CP 12.7x500			500	19.7			128	5.04				
BZ-CP 12.7x600			600	23.6			154	6.06				
BZ-CP 12.7x750			750	29.5			188	7.40				
BZ-CP 12.7x900			900	35.4			228	8.98				
BZ-CP 12.7x1100			1100	43.3			278	10.94				
BZ-CP 15x350	15	0.59	350	13.8	0.45	0.018	78	3.07	25.4	1.00	3400	770
BZ-CP 15x400			400	15.7			102	4.02				
BZ-CP 15x450			450	17.7			108	4.25				
BZ-CP 15x600			600	23.6			148	5.83				
BZ-CP 15x750			750	29.5			184	7.24				
BZ-CP 15x900			900	35.4			220	8.66				
BZ-CP 15x1100			1100	43.3			272	10.71				

Stainless Steel All Coated Cable Tie BZ-CA Series



Specification

- Material: Stainless Steel 304/316
- Working Temperature: -80°C to 150°C
- Flammability: Fireproof
- Color: Black
- Coating: Polyester/Epoxy, Nylon 11

Features

- UV-resistant

Item No.	Width		Length		Thickness		Max.Bundle		Min.Bundle Dia.		Min. Tensile	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	N	lbs
BZ-CA 4.6x100	4.6	0.18	100	3.9	0.35	0.014	25	1.00	12.7	0.50	900	200
BZ-CA 4.6x150			150	5.9			37	1.46				
BZ-CA 4.6x200			200	7.9			50	1.97				
BZ-CA 4.6x250			250	9.8			63	2.50				
BZ-CA 4.6 x 300			300	11.8			76	3.00				
BZ-CA 4.6x350			350	13.8			89	3.51				
BZ-CA 4.6x400			400	15.7			102	4.00				
BZ-CA 4.6x450			450	17.7			115	4.50				
BZ-CA 4.6x500			500	19.7			128	5.00				
BZ-CA 4.6x550			550	21.7			141	5.56				
BZ-CA 4.6x650			650	25.6			167	6.58				
BZ-CA 4.6 x 700			700	27.6			179	7.05				
BZ-CA 4.6x800			800	31.5			193	7.60				
BZ-CA 4.6x900			900	35.4			200	7.87				
BZ-CA 4.6x1000			1000	39.4			206	8.12				
BZ-CA 4.6x1100			1100	43.3			278	10.94				

Item No.	Width		Length		Thickness		Max.Bundle		Min.Bundle Dia.		Min. Tensile	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	N	lbs
BZ-CA 7.9x150	7.9	0.31	150	5.9	0.35	0.014	37	1.46	12.7	0.50	1200	270
BZ-CA 7.9 x 200			200	7.9			50	1.97				
BZ-CA 7.9x250			250	9.8			63	2.50				
BZ-CA 7.9x300			300	11.8			76	3.00				
BZ-CA 7.9x350			350	13.8			89	3.50				
BZ-CA 7.9x400			400	15.7			102	4.00				
BZ-CA 7.9x500			500	19.7			128	5.00				
BZ-CA 7.9x600			600	23.6			154	6.07				
BZ-CA 7.9x800			800	31.5			193	7.60				
BZ-CA 7.9x1000			1000	39.4			206	8.12				
BZ-CA 10x300	10	0.39	300	11.8	0.35	0.014	76	3.00	12.7	0.50	1700	390
BZ-CA 10x350			350	13.8			89	3.50				
BZ-CA 10x400			400	15.7			102	4.00				
BZ-CA 10x500			500	19.7			128	5.00				
BZ-CA 10x600			600	23.6			154	6.07				
BZ-CA 10x800			800	31.5			193	7.60				
BZ-CA 10x1000			1000	39.4			206	8.12				
BZ-CA 12x350	12	0.47	350	13.8	0.45	0.018	78	3.07	25.4	1.00	2200	500
BZ-CA 12x400			400	15.7			102	4.02				
BZ-CA 12x500			500	19.7			128	5.04				
BZ-CA 12x600			600	23.6			154	6.06				
BZ-CA 12x750			750	29.5			188	7.40				
BZ-CA 12x900			900	35.4			228	8.98				
BZ-CA 12x1100			1100	43.3			278	10.94				
BZ-CA 12.7x350	12.7	0.50	350	13.8	0.45	0.018	78	3.07	25.4	1.00	2800	630
BZ-CA 12.7x400			400	15.7			102	4.02				
BZ-CA 12.7x500			500	19.7			128	5.04				
BZ-CA 12.7x600			600	23.6			154	6.06				
BZ-CA 12.7x750			750	29.5			188	7.40				
BZ-CA 12.7x900			900	35.4			228	8.98				
BZ-CA 12.7x1100			1100	43.3			278	10.94				
BZ-CA 15x350	15	0.59	350	13.8	0.45	0.018	78	3.07	25.4	1.00	3400	770
BZ-CA 15x400			400	15.7			102	4.02				
BZ-CA 15x450			450	17.7			108	4.25				
BZ-CA 15x600			600	23.6			148	5.83				
BZ-CA 15x750			750	29.5			184	7.24				
BZ-CA 15x900			900	35.4			220	8.66				
BZ-CA 15x1100			1100	43.3			272	10.71				

Stainless Steel PVC Coated Cable Tie BZ-CB Series



Specification


- Material: Stainless Steel 304/316
- Working Temperature: -40°C to 185°C
- Flammability: Fireproof
- Color: Black
- Coating: PVC

Features

- UV-resistant, softer.

Item No.	Width		Length		Thickness		Max.Bundle		Min.Bundle Dia.		Min. Tensile	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	N	lbs
BZ-CB 5.6x150	5.6	0.22	150	5.9	1.00	0.039	37	1.46	12.7	0.50	350	80
BZ-CB 5.6x200			200	7.9			50	1.97				
BZ-CB 5.6x250			250	9.8			63	2.48				
BZ-CB 5.6 x 350			350	13.8			89	3.50				
BZ-CB 5.6x450			450	17.7			115	4.53				
BZ-CB 5.6x600			600	23.6			154	6.06				
BZ-CB 5.6x750			750	29.5			178	7.01				
BZ-CB 5.6x900			900	35.4			229	9.02				
BZ-CB 9x200	9	0.35	200	7.9	1.00	0.039	52	2.05	25.4	1.00	450	100
BZ-CB 9x250			250	9.8			65	2.56				
BZ-CB 9x300			300	11.8			78	3.07				
BZ-CB 9x400			400	15.7			102	4.02				
BZ-CB 9 x 500			500	19.7			128	5.04				
BZ-CB 9x650			650	25.6			165	6.50				
BZ-CB 9 x 800			800	31.5			204	8.03				
BZ-CB 9x1000			1000	39.4			254	10.0				
BZ-CB 16x350	16	0.63	350	13.8	1.20	0.047	89	3.50	25.4	1.00	900	200
BZ-CB 16x450			450	17.7			115	4.53				
BZ-CB 16x550			550	21.7			141	5.55				
BZ-CB 16x700			700	27.6			179	7.05				
BZ-CB 16x850			850	33.5			216	8.50				
BZ-CB 16x1100			1100	43.3			280	11.02				

Nylon Cable Ties w/ Stainless Steel Inlay NZ-1 Series

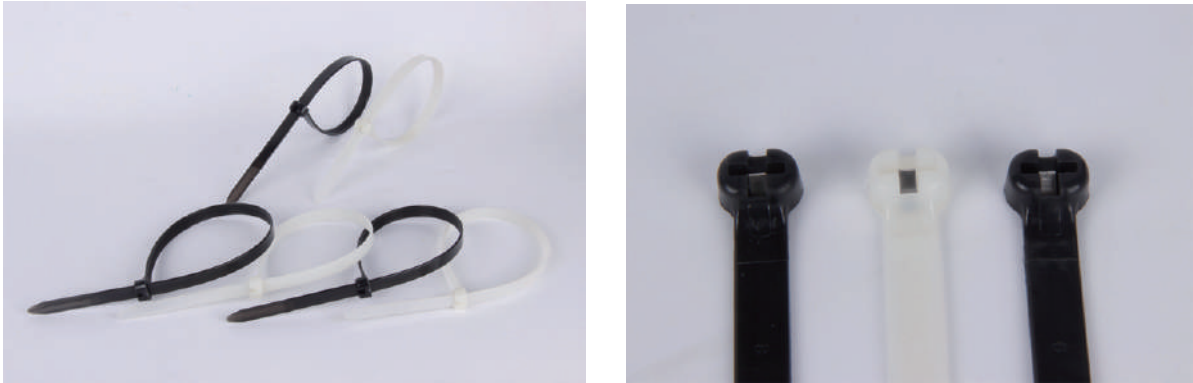

Specification


- Material: Nylon 66
- Working Temperature: -40°C to 85°C
- Flammability Rating: UL94V-2
- Color: Nature, Black and customized

Features

- UV-resistant, Halogen Free

Item No	Specification(WxL) (mm)	Effective length (mm)	Max.Bundle Dia. (mm)	Min. Tensile Strength	
				N	lbs
NZ-1	3X100	80	25	80	18
NZ-1	4X150	120	35	180	40
NZ-1	4X200	170	50		
NZ-1	5X250	200	65	220	50
NZ-1	5X300	115	80		
NZ-1	8X145	260	35		
NZ-1	8X175	145	45	500	112
NZ-1	8X200	170	50		
NZ-1	8X240	200	60		
NZ-1	8X300	260	80		
NZ-1	8X400	360	110		
NZ-1	10X300	260	80	550	124
NZ-1	10X350	310	95		
NZ-1	10X400	360	110		
NZ-1	10X450	410	130		
NZ-1	10X550	510	160		
NZ-1	10X600	560	175		

Nylon Cable Ties NZ-2 Series

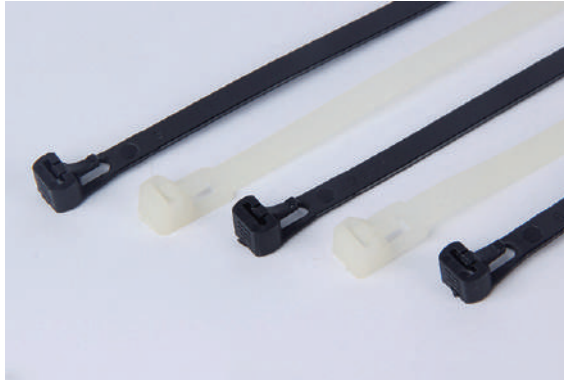

Specification

- Material: Stainless Steel 304/316
- Working Temperature: -40°C to 185°C
- Flammability: Fireproof
- Color: Black
- Coating: PVC

Features


- UV-resistant, softer.



Item No	Length (mm)	Width (mm)	Thickness (mm)	Max.Bundle Dia.	Min. Tensile Strength	
					N	lbs
NZ-2(3 x 60)	60	2.5	1.0	11	80	18
NZ-2(3x80)	80	2.5	1.0	15		
NZ-2(3x100)	100	2.5	1.0	22		
NZ-2(3x120)	120	2.5	1.1	30		
NZ-2(3x150)	150	2.5	1.1	35		
NZ-2(3x160)	160	2.5	1.1	40		
NZ-2(3x200)	200	2.5	1.1	53	180	40
NZ-2(4x120)	120	3.6	1.2	30		
NZ-2(4x140)	140	3.6	1.3	33		
NZ-2(4x150)	150	3.6	1.3	35		
NZ-2(4x180)	180	3.6	1.3	44		
NZ-2(4x200)	200	3.6	1.3	53		
NZ-2(4 x 250)	250	3.6	1.35	65		
NZ-2(4x300)	300	3.6	1.35	76		
NZ-2(4x370)	370	3.6	1.35	102		

Item No	Length (mm)	Width (mm)	Thickness (mm)	Max.Bundle Dia.	Min. Tensile Strength	
					N	lbs
NZ-2(5x120)	120	4.8	1.35	24	220	50
NZ-2(5x150)	150	4.8	1.35	35		
NZ-2(5x180)	180	4.8	1.35	46		
NZ-2(5 x 200)	200	4.8	1.3	50		
NZ-2(5 x 250)	250	4.8	1.45	60		
NZ-2(5 x 280)	280	4.8	1.45	70		
NZ-2(5 x 300)	300	4.8	1.45	76		
NZ-2(5 x 350)	350	4.8	1.45	83		
NZ-2(5 x 380)	380	4.8	1.45	102		
NZ-2(5x400)	400	4.8	1.45	105		
NZ-2(5x430)	430	4.8	1.45	110		
NZ-2(5x450)	450	4.8	1.45	116		
NZ-2(5x 500)	500	4.8	1.45	145	550	120
NZ-2(8 x 200)	200	7.5	1.7	50		
NZ-2(8 x 250)	250	7.5	1.7	65		
NZ-2(8 x 300)	300	7.5	1.6	76		
NZ-2(8x 350)	350	7.5	1.6	83		
NZ-2(8 x 380)	380	7.5	1.7	102		
NZ-2(8x400)	400	7.5	1.7	105		
NZ-2(8x450)	450	7.5	1.7	116		
NZ-2(8x 500)	500	7.5	1.7	132		
NZ-2(8 x 550)	550	7.5	1.8	145		
NZ-2(8 x 760)	760	7.5	1.9	228		
NZ-2(9x400)	400	9.0	1.9	105	800	175
NZ-2(9x450)	450	9.0	1.9	116		
NZ-2(9 x 500)	500	9.0	1.9	132		
NZ-2(9 x 550)	550	9.0	1.9	145		
NZ-2(9 x 650)	650	9.0	1.9	178		
NZ-2(9 x 700)	700	9.0	1.9	205		
NZ-2(9 x 760)	760	9.0	1.9	225		
NZ-2(9 x 920)	920	9.0	2.1	263		
NZ-2(9x 1020)	1020	9.0	2.1	295	1140	256
NZ-2(12x450)	450	12.0	2.3	116		
NZ-2(12x500)	500	12.0	2.3	132		

Brass Cable Gland M Series



Specification

- Material: Nickel Plated Brass
- Clamping Jaw: Nylon PA
- Sealing: NBR
- Working Temperature: -40°C to 100°C
120°C at short time.
- Protection Rating: IP68
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make some changes on materials


规格 Thread	电缆范围 Øk mm	螺纹长度 GL mm	本体高度 H mm	扳手直径 mm	螺纹外径 AG mm	开孔尺寸 Panel MountingHole mm
M12×1.5	3-6.5	5	18	14	12	12-12.3
M12×1.5	2-5	5	18	14	12	12-12.3
M12×1.5	4-8	6	20	17	12	12-12.3
M12×1.5	2-6	6	20	17	12	12-12.3
M14×1.5	4-8	6	20	17	14	14-14.3
M14×1.5	2-6	6	20	17	14	14-14.3
M16×1.5	4-8	6	20	17	16	16-16.3
M16×1.5	2-6	6	20	17	16	16-16.3
M16×1.5	5-10	6	21	20	16	16-16.3
M16×1.5	3-7	6	21	20	16	16-16.3
M18×1.5	5-10	6	21	20	18	18-18.3
M18×1.5	3-7	6	21	20	18	18-18.3
M20×1.5	6-12	6.5	22	22	20	20-20.3
M20×1.5	5-9	6.5	22	22	20	20-20.3
M20×1.5	10-14	6.5	23	24	20	20-20.3
M20×1.5	7-12	6.5	23	24	20	20-20.3
M22×1.5	10-14	6.5	23	24	22	22-22.3
M22×1.5	7-12	6.5	23	24	22	22-22.3
M24×1.5	10-14	6.5	23	24/27	24	24-24.3
M24×1.5	7-12	6.5	23	24/27	24	24-24.3
M25×1.5	11-16	7	25	27	25	25-25.3
M25×1.5	9-14	7	25	27	25	25-25.3
M25×1.5	13-18	7	25	30	25	25-25.3
M25×1.5	9-16	7	25	30	25	25-25.3
M27×1.5	13-18	7	25	30	27	27-27.3
M27×1.5	9-16	7	25	30	27	27-27.3
M28×1.5	13-18	7	25	30	28	28-28.3
M28×1.5	9-16	7	25	30	28	28-28.3
M30×1.5	13-18	8	25	30/32	30	30-30.3
M30×1.5	9-16	8	25	30/32	30	30-30.3
M30×1.5	12-21	8	26	30/32	30	30-30.3
M30×1.5	7-15	8	26	30/32	30	30-30.3
M32×1.5	13-18	8	25	34	32	32-32.3
M32×1.5	9-16	8	25	34	32	32-32.3
M32×1.5	12-21	8	26	34	32	32-32.3
M32×1.5	7-15	8	26	34	32	32-32.3

Brass Cable Gland M Series



规格 Thread	电缆范围 Øk mm	螺纹长度 GL mm	本体高度 H mm	扳手直径 mm	螺纹外径 AG mm	开孔尺寸 Panel MountingHole mm
M32×1.5	18-25	8	30	40	32	32-32.3
M32×1.5	13-20	8	30	40	32	32-32.3
M33×1.5	18-25	8	30	40	33	33-33.3
M33×1.5	13-20	8	30	40	33	33-33.3
M36×1.5	18-25	8	30	40	36	36-36.3
M36×1.5	13-20	8	30	40	36	36-36.3
M37×1.5	18-25	8	30	40	37	37-37.3
M37×1.5	13-20	8	30	40	37	37-37.3
M40×1.5	19-28	8	31	44	40	40-40.3
M40×1.5	15-23	8	31	44	40	40-40.3
M40×1.5	22-32	8	35	50	40	40-40.3
M40×1.5	20-26	8	35	50	40	40-40.3
M42×1.5	22-32	8	35	50	42	42-42.3
M42×1.5	20-26	8	35	50	42	42-42.3
M47×1.5	22-32	8	35	50	47	47-47.3
M47×1.5	20-26	8	35	50	47	47-47.3
M48×1.5	22-32	8	35	50/52	48	48-48.3
M48×1.5	20-26	8	35	50/52	48	48-48.3
M50×1.5	27-35	9	37	55	50	50-50.3
M50×1.5	22-29	9	37	55	50	50-50.3
M50×1.5	32-38	9	38	57	50	50-50.3
M50×1.5	25-31	9	38	57	50	50-50.3
M54×1.5	32-38	9	38	57	54	54-54.3
M54×1.5	25-31	9	38	57	54	54-54.3
M56×1.5	32-38	9	38	57/59	56	56-56.3
M56×1.5	25-31	9	38	57/59	56	56-56.3
M60×1.5	37-44	10	40	64	60	60-60.3
M60×1.5	29-35	10	40	64	60	60-60.3
M63×1.5	37-44	10	40	64/68	63	63-63.3
M63×1.5	29-35	10	40	64/68	63	63-63.3
M64×1.5	37-44	10	40	64/68	64	64-64.3
M64×1.5	29-35	10	40	64/68	64	64-64.3

Brass Cable Gland PG Series




Specification

- Material: Brass with Nickel Plated
- Clamping Jaw: Nylon PA
- Sealing: NBR
- Working Temperature: -40°C to 100°C
120°C at short time.
- Protection Rating: IP68
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make some changes on materials

规格 Thread	电缆范围 mm	螺纹长度 GL mm	本体高度 H mm	扳手直径 mm	螺纹外径 AG mm	开孔尺寸 Panel MountingHole mm
PG7	3-6.5	5	18	14	12.5	12.5-12.8
PG7	2-5	5	18	14	12.5	12.5-12.8
PG9	4-8	6	20	17	15.2	15.2-15.5
PG9	2-6	6	20	17	15.2	15.2-15.5
PG11	5-10	6	21	20	18.6	18.6-18.9
PG11	3-7	6	21	20	18.6	18.6-18.9
PG13.5	6-12	6.5	22	22	20.4	20.4-20.7
PG13.5	5-9	6.5	22	22	20.4	20.4-20.7
PG16	10-14	6.5	23	24	22.5	22.5-22.8
PG16	7-12	6.5	23	24	22.5	22.5-22.8
PG21	13-18	7	25	30	28.3	28.3-28.6
PG21	9-16	7	25	30	28.3	28.3-28.6
PG29	18-25	8	30	40	37	37-37.3
PG29	13-20	8	30	40	37	37-37.3
PG36	22-32	8	35	50	47	47-47.3
PG36	20-26	8	35	50	47	47-47.3
PG42	32-38	9	38	57	54	54-54.3
PG42	25-31	9	38	57	54	54-54.3
PG48	37-44	10	40	64	59.3	59.3-59.6
PG48	29-35	10	40	64	59.3	59.3-59.6



Brass Cable Gland NPT Series




Specification

- Material: Brass with Nickel Plated
- Clamping Jaw: Nylon PA
- Sealing: NBR
- Working Temperature: -40°C to 100°C
120°C at short time.
- Protection Rating: IP68
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make some changes on materials

规格 Thread	电缆范围 mm	螺纹长度 GL mm	本体高度 H mm	扳手直径 mm	螺纹外径 AG mm	开孔尺寸 Panel MountingHole mm
NPT1/4	3-6.5	8	18	14/15	13.7	13.7-14
NPT1/4	2-5	8	18	14/15	13.7	13.7-14
NPT1/4	4-8	8	20	17	13.7	13.7-14
NPT1/4	2-6	8	20	17	13.7	13.7-14
NPT3/8	4-8	15	20	17/18	17	17-17.3
NPT3/8	2-6	15	20	17/18	17	17-17.3
NPT3/8	5-10	15	21	20	17	17-17.3
NPT3/8	3-7	15	21	20	17	17-17.3
NPT1/2	6-12	13	22	22	21.2	21.2-21.5
NPT1/2	5-9	13	22	22	21.2	21.2-21.5
NPT1/2	10-14	13	23	24	21.2	21.2-21.5
NPT1/2	7-12	13	23	24	21.2	21.2-21.5
NPT3/4	13-18	15	25	30	26.2	26.6-26.9
NPT3/4	9-16	15	25	30	26.2	26.6-26.9
NPT1	18-25	16	30	40	33.3	33.3-33.6
NPT1	13-20	16	30	40	33.3	33.3-33.6
NPT1 1/4	18-25	18	30	40/44	42	42-42.3
NPT1 1/4	13-20	18	30	40/44	42	42-42.3
NPT1 1/4	22-32	18	35	50	42	42-42.3
NPT1 1/4	20-26	18	35	50	42	42-42.3
NPT1 1/2	22-32	18	35	50	48	48-48.3
NPT1 1/2	20-26	18	35	50	48	48-48.3
NPT1 1/2	32-38	18	38	57	48	48-48.3
NPT1 1/2	25-31	18	38	57	48	48-48.3
NPT2	37-44	18	40	64	60	60-60.3
NPT2	29-35	18	40	64	60	60-60.3

Brass Cable Gland G Series




Specification

- Material: Brass with Nickel Plated
- Clamping Jaw: Nylon PA
- Sealing: NBR
- Working Temperature: -40°C to 100°C
- 120°C at short time.
- Protection Rating: IP68
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make some changes on materials

规格 Thread	电缆范围 Øk mm	螺纹长度 GL mm	本体高度 H mm	扳手直径 mm	螺纹外径 AG mm	开孔尺寸 Panel MountingHole mm
G1/4 "	3-6.5	7	18	14/15	13.1	13.1-13.4
G1/4 "	2-5	7	18	14/15	13.1	13.1-13.4
G1/4 "	4-8	7	20	17	13.1	13.1-13.4
G1/4 "	2-6	7	20	17	13.1	13.1-13.4
G3/8 "	4-8	8	20	17/18	16.6	16.6-16.9
G3/8 "	2-6	8	20	17/18	16.6	16.6-16.9
G3/8 "	5-10	8	21	20	16.6	16.6-16.9
G3/8 "	3-7	8	21	20	16.6	16.6-16.9
G1/2 "	6-12	8	22	22	20.9	20.9-21.2
G1/2 "	5-9	8	22	22	20.9	20.9-21.2
G1/2 "	10-14	8	23	24	20.9	20.9-20.2
G1/2 "	7-12	8	23	24	20.9	20.9-20.2
G3/4 "	13-18	8	25	30	26.4	26.4-26.7
G3/4 "	9-16	8	25	30	26.4	26.4-26.7
G1 "	18-25	10	30	40	33.2	33.2-33.5
G1 "	13-20	10	30	40	33.2	33.2-33.5
G1 1/4 "	18-25	10	30	40/44	41.9	41.9-42.2
G1 1/4 "	13-20	10	30	40/44	41.9	41.9-42.2
G1 1/4 "	22-32	10	35	50	41.9	41.9-42.2
G1 1/4 "	20-26	10	35	50	41.9	41.9-42.2
G1 1/2 "	22-32	10	35	50	47.8	47.8-48.1
G1 1/2 "	20-26	10	35	50	47.8	47.8-48.1
G1 1/2 "	32-38	10	38	57	47.8	47.8-48.1
G1 1/2 "	25-31	10	38	57	47.8	47.8-48.1
G2 "	37-44	12	40	64	59.6	59.6-59.9
G2 "	29-35	12	40	64	59.6	59.6-59.9

Brass Cable Gland Long Thread PG Series




Specification

- Material: Brass with Nickel Plated
- Clamping Jaw: Nylon PA
- Sealing: NBR
- Working Temperature: -40°C to 100°C
- 120°C at short time.
- Protection Rating: IP68
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make some changes on materials

规格 Thread	电缆范围 Øk mm	螺纹长度 GL mm	本体高度 H mm	扳手直径 mm	螺纹外径 AG mm	开孔尺寸 Panel MountingHole mm
PG7	3-6.5	10	18	14	12.5	12.5-12.8
PG7	2-5	10	18	14	12.5	12.5-12.8
PG9	4-8	10	20	17	15.2	15.2-15.5
PG9	2-6	10	20	17	15.2	15.2-15.5
PG11	5-10	10	21	20	18.6	18.6-18.9
PG11	3-7	10	21	20	18.6	18.6-18.9
PG13.5	6-12	10	22	22	20.4	20.4-20.7
PG13.5	5-9	10	22	22	20.4	20.4-20.7
PG16	10-14	10	23	24	22.5	22.5-22.8
PG16	7-12	10	23	24	22.5	22.5-22.8
PG21	13-18	12	25	30	28.3	28.3-28.6
PG21	9-16	12	25	30	28.3	28.3-28.6
PG29	18-25	12	30	40	37	37-37.3
PG29	13-20	12	30	40	37	37-37.3
PG36	22-32	15	35	50	47	47-47.3
PG36	20-26	15	35	50	47	47-47.3
PG42	32-38	15	38	57	54	54-54.3
PG42	25-31	15	38	57	54	54-54.3
PG48	37-44	15	40	64	59.3	59.3-59.6
PG48	29-35	15	40	64	59.3	59.3-59.6



Brass Cable Gland Long Thread M Series



- Specification
- Material: Brass with Nickel Plated
 - Clamping Jaw: Nylon PA
 - Sealing: NBR
 - Working Temperature: -40°C to 100°C
120°C at short time.
 - Protection Rating: IP68
 - Certificates: CE, RoHS, REACH and so on
 - Plz let us know if you wanna make some changes on materials

规格 Thread	电缆范围 Øk mm	螺纹长度 GL mm	本体高度 H mm	扳手直径 mm	螺纹外径 AG mm	开孔尺寸 Panel MountingHole mm
M12×1.5	3-6.5	10	18	14	12	12-12.3
M12×1.5	2-5	10	18	14	12	12-12.3
M12×1.5	4-8	10	20	17	12	12-12.3
M12×1.5	2-6	10	20	17	12	12-12.3
M14×1.5	4-8	10	20	17	14	14-14.3
M14×1.5	2-6	10	20	17	14	14-14.3
M16×1.5	4-8	10	20	17	16	16-16.3
M16×1.5	2-6	10	20	17	16	16-16.3
M16×1.5	5-10	10	21	20	16	16-16.3
M16×1.5	3-7	10	21	20	16	16-16.3
M18×1.5	5-10	10	21	20	18	18-18.3
M18×1.5	3-7	10	21	20	18	18-18.3
M20×1.5	6-12	10	22	22	20	20-20.3
M20×1.5	5-9	10	22	22	20	20-20.3
M20×1.5	10-14	10	23	24	20	20-20.3
M20×1.5	7-12	10	23	24	20	20-20.3
M22×1.5	10-14	10	23	24	22	22-22.3
M22×1.5	7-12	10	23	24	22	22-22.3
M24×1.5	10-14	10	23	24/27	24	24-24.3
M24×1.5	7-12	10	23	24/27	24	24-24.3
M25×1.5	11-16	12	25	27	25	25-25.3
M25×1.5	9-14	12	25	27	25	25-25.3
M25×1.5	13-18	12	25	30	25	25-25.3
M25×1.5	9-16	12	25	30	25	25-25.3
M27×1.5	13-18	12	25	30	27	27-27.3
M27×1.5	9-16	12	25	30	27	27-27.3
M28×1.5	13-18	12	25	30	28	28-28.3
M28×1.5	9-16	12	25	30	28	28-28.3
M30×1.5	13-18	12	25	30/32	30	30-30.3
M30×1.5	9-16	12	25	30/32	30	30-30.3
M30×1.5	12-21	12	26	30/32	30	30-30.3
M30×1.5	7-15	12	26	30/32	30	30-30.3
M32×1.5	13-18	12	25	34	32	32-32.3
M32×1.5	9-16	12	25	34	32	32-32.3
M32×1.5	12-21	12	26	34	32	32-32.3
M32×1.5	7-15	12	26	34	32	32-32.3

Brass Cable Gland Long Thread M Series




规格 Thread	电缆范围 Øk mm	螺纹长度 GL mm	本体高度 H mm	扳手直径 mm	螺纹外径 AG mm	开孔尺寸 Panel MountingHole mm
M32×1.5	18-25	12	30	40	32	32-32.3
M32×1.5	13-20	12	30	40	32	32-32.3
M33×1.5	18-25	12	30	40	33	33-33.3
M33×1.5	13-20	12	30	40	33	33-33.3
M36×1.5	18-25	12	30	40	36	36-36.3
M36×1.5	13-20	12	30	40	36	36-36.3
M37×1.5	18-25	12	30	40	37	37-37.3
M37×1.5	13-20	12	30	40	37	37-37.3
M40×1.5	19-28	15	31	44	40	40-40.3
M40×1.5	15-23	15	31	44	40	40-40.3
M40×1.5	22-32	15	35	50	40	40-40.3
M40×1.5	20-26	15	35	50	40	40-40.3
M42×1.5	22-32	15	35	50	42	42-42.3
M42×1.5	20-26	15	35	50	42	42-42.3
M47×1.5	22-32	15	35	50	47	47-47.3
M47×1.5	20-26	15	35	50	47	47-47.3
M48×1.5	22-32	15	35	50/52	48	48-48.3
M48×1.5	20-26	15	35	50/52	48	48-48.3
M50×1.5	27-35	15	37	55	50	50-50.3
M50×1.5	22-29	15	37	55	50	50-50.3
M50×1.5	32-38	15	38	57	50	50-50.3
M50×1.5	25-31	15	38	57	50	50-50.3
M54×1.5	32-38	15	38	57	54	54-54.3
M54×1.5	25-31	15	38	57	54	54-54.3
M56×1.5	32-38	15	38	57/59	56	56-56.3
M56×1.5	25-31	15	38	57/59	56	56-56.3
M60×1.5	37-44	15	40	64	60	60-60.3
M60×1.5	29-35	15	40	64	60	60-60.3
M63×1.5	37-44	15	40	64/68	63	63-63.3
M63×1.5	29-35	15	40	64/68	63	63-63.3
M64×1.5	37-44	15	40	64/68	64	64-64.3
M64×1.5	29-35	15	40	64/68	64	64-64.3

Brass Cable Gland Mini Type M/PG/M L-thread Series



Specification

- Material: Brass with Nickel Plated
- Clamping Jaw: Nylon PA
- Sealing: NBR
- Working Temperature: -40°C to 100°C
120°C at short time.
- Protection Rating: IP68
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make some changes on materials



规格 Thread	电缆范围 Øk mm	螺纹长度 GL mm	本体高度 H mm	扳手直径 mm	螺纹外径 AG mm	开孔尺寸 Panel MountingHole mm
M6x1	2-3.2	6	10	8	6	6-6.2
M8x0.75	2-4.5	3.5	13	11	8	8-8.2
M8x1.25	3-5	6	13	11	8	8-8.2
M10x1.5	4-6	6	14	12	10	10-10.2
PG7	2-4.5	3.5	14	11/15	12.5	12.5-12.8
M8x1.25	3-5	10	13	11	8	8-8.2
M10x1.5	4-6	10	14	12	10	10-10.2




Brass Cable Gland Large Type M Series



Specification


- Material: Brass with Nickel Plated
- Clamping Jaw: Nylon PA
- Sealing: NBR
- Working Temperature: -40°C to 100°C
120°C at short time.
- Protection Rating: IP68
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make some changes on materials



规格 Thread	电缆范围 Øk mm	螺纹长度 GL mm	本体高度 H mm	扳手直径 mm	螺纹外径 AG mm	开孔尺寸 Panel MountingHole mm
M63×1.5	48-55	10	42	75	63	63-63.3
M72×2	48-55	15	45	80	72	72-72.3
M75×2	48-55	15	45	80	75	75-75.3
M75×2	53-60	15	45	85	75	75-75.3
M76×2	54-62	15	45	85	76	76-76.3
M80×2	58-65	15	47	90	80	80-80.3
M88×2	63-70	15	47	100	88	88-88.3
M90×2	63-70	15	47	100	90	90-90.3
M90×2	68-75	20	47	100	90	90-90.3
M100×2	73-80	20	55	110	100	100-100.3
M100×2	78-85	20	55	110	100	100-100.3
M110×2	83-90	20	55	120	110	110-110.3
M114×2	86-93	22	55	125	114	114-114.3
M120×2	88-95	22	60	130	120	120-120.3
M120×2	93-100	22	60	130	120	120-120.3
M125×2	95-102	22	60	138	125	125-125.3
M150×2	100-108	25	65	160	150	150-150.3
M150×2	106-115	25	65	160	150	150-150.3
M150×2	110-120	25	65	160	150	150-150.3



Brass Cable Gland Large Type NPT Series




Specification

- Material: Brass with Nickel Plated
- Clamping Jaw: Nylon PA
- Sealing: NBR
- Working Temperature: -40°C to 100°C
120°C at short time.
- Protection Rating: IP68
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make some changes on materials

规格 Thread	电缆范围 Øk mm	螺纹长度 GL mm	本体高度 H mm	扳手直径 mm	螺纹外径 AG mm	开孔尺寸 Panel MountingHole mm
NPT2½	48-55	23	45	80	72.699	72.7-73
NPT2½	53-60	23	45	85	72.699	72.7-73
NTP3	58-65	26	46	90/95	88.608	88.7-89
NTP3	63-70	26	46	100	88.608	88.7-89
NTP4	68-75	28	55	100/120	113.973	114-115
NTP4	73-80	28	55	100/120	113.973	114-115
NTP4	78-85	28	55	100/120	113.973	114-115
NTP4	83-90	28	55	120	113.973	114-115



Brass Cable Gland Large Type G Series



Specification

- Material: Brass with Nickel Plated
- Clamping Jaw: Nylon PA
- Sealing: NBR
- Working Temperature: -40°C to 100°C
120°C at short time.
- Protection Rating: IP68
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make some changes on materials

规格 Thread	电缆范围 Øk mm	螺纹长度 GL mm	本体高度 H mm	扳手直径 mm	螺纹外径 AG mm	开孔尺寸 Panel MountingHole mm
G2½	48-55	18	45	80	75.184	75.2-75.7
G2½	53-60	18	45	85	75.184	75.2-75.7
G3	58-65	18	45	90/95	87.884	87.9-88.5
G3	63-70	18	45	100	87.884	87.9-88.5
G4	68-75	22	55	100/120	113.030	113.1-114
G4	73-80	22	55	100/120	113.030	113.1-114
G4	78-85	22	55	100/120	113.030	113.1-114
G4	83-90	22	55	120	113.030	113.1-114
G4½	95-102	25	60	138	125.730	125.8-127




Brass Spiral Cable Gland PG Series



Specification

- Material: Brass with Nickel Plated
- Clamping Jaw: Nylon PA
- Sealing: NBR
- Working Temperature: -40°C to 100°C
120°C at short time.
- Protection Rating: IP68
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make some changes on materials

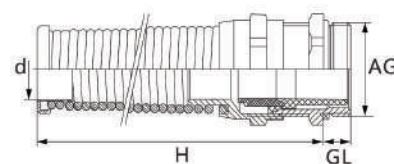

规格 Thread	电缆范围 mm	螺纹长度 GL mm	本体高度 H mm	扳手直径 mm	螺纹外径 AG mm	开孔尺寸 Panel MountingHole mm
PG7	3-6.5	5	53	14	12.5	12.5-12.8
PG7	2-5	5	53	14	12.5	12.5-12.8
PG9	4-8	6	66	17	15.2	15.2-15.5
PG9	2-6	6	66	17	15.2	15.2-15.5
PG11	5-10	6	77	20	18.6	18.6-18.9
PG11	3-7	6	77	20	18.6	18.6-18.9
PG13.5	6-12	6.5	88	22	20.4	20.4-20.7
PG13.5	5-9	6.5	88	22	20.4	20.4-20.7
PG16	10-14	6.5	98	24	22.5	22.5-22.8
PG16	7-12	6.5	98	24	22.5	22.5-22.8
PG21	13-18	7	111	30	28.3	28.3-28.6
PG21	9-16	7	111	30	28.3	28.3-28.6




Brass Spiral Cable Gland M Series



Specification

- Material: Brass with Nickel Plated
- Clamping Jaw: Nylon PA
- Sealing: NBR
- Working Temperature: -40°C to 100°C
120°C at short time.
- Protection Rating: IP68
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make some changes on materials

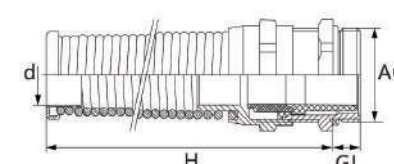


规格 Thread	电缆范围 mm	螺纹长度 GL mm	本体高度 H mm	扳手直径 mm	螺纹外径 AG mm	开孔尺寸 Panel MountingHole mm
M12×1.5	3-6.5	5	53	14	12	12-12.3
M12×1.5	2-5	5	53	14	12	12-12.3
M12×1.5	4-8	6	66	17	12	12-12.3
M12×1.5	2-6	6	66	17	12	12-12.3
M14×1.5	4-8	6	66	17	14	14-14.3
M14×1.5	2-6	6	66	17	14	14-14.3
M16×1.5	4-8	6	66	17	16	16-16.3
M16×1.5	2-6	6	66	17	16	16-16.3
M16×1.5	5-10	6	77	20	16	16-16.3
M16×1.5	3-7	6	77	20	16	16-16.3
M18×1.5	5-10	6	77	20	18	18-18.3
M18×1.5	3-7	6	77	20	18	18-18.3
M20×1.5	6-12	6.5	88	22	20	20-20.3
M20×1.5	5-9	6.5	88	22	20	20-20.3
M20×1.5	10-14	6.5	98	24	20	20-20.3
M20×1.5	7-12	6.5	98	24	20	20-20.3
M22×1.5	10-14	6.5	98	24	22	22-22.3
M22×1.5	7-12	6.5	98	24	22	22-22.3
M24×1.5	12-14	6.5	98	24/27	24	24-24.3
M24×1.5	7-12	6.5	98	24/27	24	24-24.3
M25×1.5	13-18	7	111	30	25	25-25.3
M25×1.5	9-16	7	111	30	25	25-25.3
M27×1.5	13-18	7	111	30	27	27-27.3
M27×1.5	9-16	7	111	30	27	27-27.3
M28×1.5	13-18	7	111	30	28	28-28.3
M28×1.5	9-16	7	111	30	28	28-28.3
M30×1.5	13-18	8	111	30/32	30	30-30.3
M30×1.5	9-16	8	111	30/32	30	30-30.3

Brass Spiral Cable Gland NPT Series



Specification

- Material: Brass with Nickel Plated
- Clamping Jaw: Nylon PA
- Sealing: NBR
- Working Temperature: -40°C to 100°C
120°C at short time.
- Protection Rating: IP68
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make some changes on materials

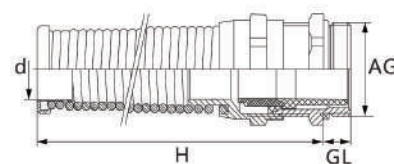

规格 Thread	电缆范围 Øk mm	螺纹长度 GL mm	本体高度 H mm	扳手直径 mm	螺纹外径 AG mm	开孔尺寸 Panel MountingHole mm
NPT1/4	3-6.5	8	53	14/15	13.7	13.7-14
NPT1/4	2-5	8	53	14/15	13.7	13.7-14
NPT1/4	4-8	8	66	17	13.7	13.7-14
NPT1/4	2-6	8	66	17	13.7	13.7-14
NPT3/8	4-8	15	66	17/18	17	17-17.3
NPT3/8	2-6	15	66	17/18	17	17-17.3
NPT3/8	5-10	15	77	20	17	17-17.3
NPT3/8	3-7	15	77	20	17	17-17.3
NPT1/2	6-12	13	88	22	21.2	21.2-21.5
NPT1/2	5-9	13	88	22	21.2	21.2-21.5
NPT1/2	10-14	13	98	24	21.2	21.2-21.5
NPT1/2	7-12	13	98	24	21.2	21.2-21.5
NPT3/4	13-18	15	111	30	26.6	26.6-26.9
NPT3/4	9-16	15	111	30	26.6	26.6-26.9




Brass Spiral Cable Gland G Series



Specification

- Material: Brass with Nickel Plated
- Clamping Jaw: Nylon PA
- Sealing: NBR
- Working Temperature: -40°C to 100°C
120°C at short time.
- Protection Rating: IP68
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make some changes on materials

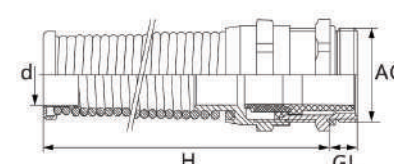

规格 Thread	电缆范围 Øk mm	螺纹长度 GL mm	本体高度 H mm	扳手直径 mm	螺纹外径 AG mm	开孔尺寸 Panel MountingHole mm
G1/4	3-6.5	7	53	14/15	13.1	13.1-13.4
G1/4	2-5	7	53	14/15	13.1	13.1-13.4
G1/4	4-8	7	66	17	13.1	13.1-13.4
G1/4	2-6	7	66	17	13.1	13.1-13.4
G3/8	4-8	8	66	17/18	16.6	16.6-16.9
G3/8	2-6	8	66	17/18	16.6	16.6-16.9
G3/8	5-10	8	77	20	16.6	16.6-16.9
G3/8	3-7	8	77	20	16.6	16.6-16.9
G1/2	6-12	8	88	22	20.9	20.9-21.2
G1/2	5-9	8	88	22	20.9	20.9-21.2
G1/2	10-14	8	98	24	20.9	20.9-20.2
G1/2	7-12	8	98	24	20.9	20.9-20.2
G3/4	13-18	8	111	30	26.4	26.4-26.7
G3/4	9-16	8	111	30	26.4	26.4-26.7




Brass Spiral Cable Gland Long Thread PG Series



Specification

- Material: Brass with Nickel Plated
- Clamping Jaw: Nylon PA
- Sealing: NBR
- Working Temperature: -40°C to 100°C
120°C at short time.
- Protection Rating: IP68
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make some changes on materials

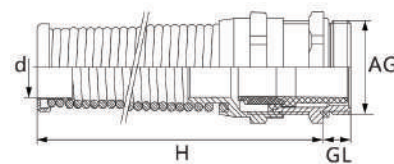

规格 Thread	电缆范围 mm	螺纹长度 GL mm	本体高度 H mm	扳手直径 mm	螺纹外径 AG mm	开孔尺寸 Panel MountingHole mm
PG7	3-6.5	10	53	14	12.5	12.5-12.8
PG7	2-5	10	53	14	12.5	12.5-12.8
PG9	4-8	10	66	17	15.2	15.2-15.5
PG9	2-6	10	66	17	15.2	15.2-15.5
PG11	5-10	10	77	20	18.6	18.6-18.9
PG11	3-7	10	77	20	18.6	18.6-18.9
PG13.5	6-12	10	88	22	20.4	20.4-20.7
PG13.5	5-9	10	88	22	20.4	20.4-20.7
PG16	10-14	10	98	24	22.5	22.5-22.8
PG16	7-12	10	98	24	22.5	22.5-22.8
PG21	13-18	12	111	30	28.3	28.3-28.6
PG21	9-16	12	111	30	28.3	28.3-28.6




Brass Spiral Cable Gland Long Thread M Series




Specification

- Material: Brass with Nickel Plated
- Clamping Jaw: Nylon PA
- Sealing: NBR
- Working Temperature: -40°C to 100°C
120°C at short time.
- Protection Rating: IP68
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make some changes on materials

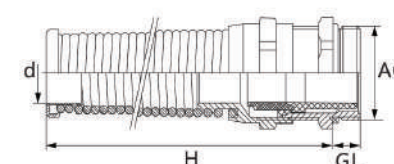

规格 Thread	电缆范围 mm	螺纹长度 GL mm	本体高度 H mm	扳手直径 mm	螺纹外径 AG mm	开孔尺寸 Panel MountingHole mm
M12×1.5	3-6.5	10	53	14	12	12-12.3
M12×1.5	2-5	10	53	14	12	12-12.3
M12×1.5	4-8	10	66	17	12	12-12.3
M12×1.5	2-6	10	66	17	12	12-12.3
M14×1.5	4-8	10	66	17	14	14-14.3
M14×1.5	2-6	10	66	17	14	14-14.3
M16×1.5	4-8	10	66	17	16	16-16.3
M16×1.5	2-6	10	66	17	16	16-16.3
M16×1.5	5-10	10	77	20	16	16-16.3
M16×1.5	3-7	10	77	20	16	16-16.3
M18×1.5	5-10	10	77	20	18	18-18.3
M18×1.5	3-7	10	77	20	18	18-18.3
M20×1.5	6-12	10	88	22	20	20-20.3
M20×1.5	5-9	10	88	22	20	20-20.3
M20×1.5	10-14	10	98	24	20	20-20.3
M20×1.5	7-12	10	98	24	20	20-20.3
M22×1.5	10-14	10	98	24	22	22-22.3
M22×1.5	7-12	10	98	24	22	22-22.3
M24×1.5	12-14	10	98	24/27	24	24-24.3
M24×1.5	7-12	10	98	24/27	24	24-24.3
M25×1.5	13-18	12	111	30	25	25-25.3
M25×1.5	9-16	12	111	30	25	25-25.3
M27×1.5	13-18	12	111	30	27	27-27.3
M27×1.5	9-16	12	111	30	27	27-27.3
M28×1.5	13-18	12	111	30	28	28-28.3
M28×1.5	9-16	12	111	30	28	28-28.3
M30×1.5	13-18	12	111	30/32	30	30-30.3
M30×1.5	9-16	12	111	30/32	30	30-30.3

Metal Round Screw Plug PG Series




Specification

- Material: Brass with Nickel Plated
Sealing: NBR
- Working Temperature: -40°C to 100°C
120°C at short time.
- Protection Rating: IP68
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make
some changes on materials

规格 Thread	螺纹长度 GL mm	本体高度 H mm	平面直径 D mm	螺纹外径 AG mm	开孔尺寸 Panel MountingHole mm
PG7	5	8	14	12.5	12.5-12.8
PG9	6	9	17	15.2	15.2-15.5
PG11	6	9	20	18.6	18.6-18.9
PG13.5	6.5	9.5	22	20.4	20.4-20.7
PG16	6.5	9.5	24	22.5	22.5-22.8
PG21	7	11	30	28.3	28.3-28.6
PG29	8	12	39	37	37-37.3
PG36	9	15	50	47	47-47.3
PG42	10	16	57	54	54-54.3
PG48	10	16	64	59.3	59.3-59.6



Metal Round Screw Plug M Series




Specification

- Material: Brass with Nickel Plated
Sealing: NBR
- Working Temperature: -40°C to 100°C
120°C at short time.
- Protection Rating: IP68
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make
some changes on materials

规格 Thread	螺纹长度 GL mm	本体高度 H mm	平面直径 D mm	螺纹外径 AG mm	开孔尺寸 Panel MountingHole mm
M12×1.5	5	8	14	12	12-12.3
M14×1.5	6	9	16	14	14-14.3
M16×1.5	6	9	18	16	16-16.3
M18×1.5	6	9	20	18	18-18.3
M20×1.5	6.5	9.5	22	20	20-20.3
M22×1.5	6.5	9.5	24	22	22-22.3
M24×1.5	6.5	11	26	24	24-24.3
M25×1.5	7	11	28	25	25-25.3
M27×1.5	7	11	30	27	27-27.3
M30×1.5	7	11	33	30	30-30.3
M32×1.5	8	12	35	32	32-32.3
M33×1.5	8	12	36	33	33-33.3
M36×1.5	8	12	40	36	36-36.3
M40×1.5	9	13	44	40	40-40.3
M42×1.5	9	13	46	42	42-42.3
M44×1.5	9	13	48	44	44-44.3
M48×1.5	9	14	52	48	48-48.3
M50×1.5	9	15	54	50	50-50.3
M56×1.5	9	15	60	56	56-56.3
M63×1.5	10	16	67	63	63-63.3
M64×1.5	10	16	68	64	64-64.3
M72×2	12	19	77	72	72-72.3
M75×2	12	19	80	75	75-75.3
M76×2	12	19	81	76	76-76.3
M80×2	14	22	88	80	80-80.3
M90×2	15	23	100	90	90-90.3
M100×2	16	24	110	100	100-100.3
M110×2	18	26.5	120	110	110-110.3

Metal Round Screw Plug NPT/G Series




Specification

- Material: Brass with Nickel Plated
Sealing: NBR
- Working Temperature: -40°C to 100°C
120°C at short time.
- Protection Rating: IP68
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make
some changes on materials

规格 Thread	螺纹长度 GL mm	本体高度 H mm	平面直径 D mm	螺纹外径 AG mm	开孔尺寸 Panel MountingHole mm
NPT1/4	8	11	16	13.616	13.7-14
NPT3/8	8	11	20	17.055	17-17.3
NPT1/2	10	13	24	21.224	21.2-21.5
NPT3/4	11	15	30	26.569	26.5-26.8
NPT1	14	18	36	33.228	33.3-33.6
NPT1 1/4	14	18	45	41.985	42-42.3
NPT1 1/2	15	20	52	48.054	48-48.3
NPT2	15	21	65	60.092	60-60.3
NPT2 1/2	20	27	79	72.699	72.7-73
NPT3	20	28	96	88.608	88.6-88.9
G1/4	7	10	16	13.157	13.2-13.5
G3/8	8	11	20	16.662	16.7-17
G1/2	8	11	24	20.995	21-21.3
G3/4	8	12	30	26.441	26.5-26.8
G1	8	12	36	33.249	33.3-33.6
G1 1/4	8	12	45	41.910	42-42.3
G1 1/2	10	13	52	47.803	47.8-48.1
G2	12	18	65	59.614	59.7-60
G2 1/2	15	22	80	75.184	75.2-76
G3	18	26	95	87.884	87.9-88.5
G3 1/2	20	28	110	100.330	100.5-101
G4	20	28.5	130	113.030	113-114

Metal Hexagonal Screw Plug PG Series




Specification

- Material: Brass with Nickel Plated
Sealing: NBR
- Working Temperature: -40°C to 100°C
120°C at short time.
- Protection Rating: IP68
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make
some changes on materials

规格 Thread	螺纹长度 GL mm	本体高度 H mm	扳手直径 mm	螺纹外径 AG mm	开孔尺寸 Panel MountingHole mm
PG7	5	8	14	12.5	12.5-12.8
PG9	6	9	17	15.2	15.2-15.5
PG11	6	9.5	20	18.6	18.6-18.9
PG13.5	6.5	10	22	20.4	20.4-20.7
PG16	6.5	10	24	22.5	22.5-22.8
PG21	7	10.5	30	28.3	28.3-28.6
PG29	8	12.5	41	37	37-37.3
PG36	8	13	50	47	47-47.3
PG42	9	15	58	54	54-54.3
PG48	10	16.5	65	59.3	59.3-59.6



Metal Hexagonal Screw Plug M Series




Specification

- Material: Brass with Nickel Plated
Sealing: NBR
- Working Temperature: -40°C to 100°C
120°C at short time.
- Protection Rating: IP68
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make
some changes on materials

规格 Thread	螺纹长度 GL mm	本体高度 H mm	扳手直径 mm	螺纹外径 AG mm	开孔尺寸 Panel MountingHole mm
M12×1.5	6.5	9.5	14	12	12-12.3
M14×1.5	6.5	9.5	17	14	14-14.3
M16×1.5	6.5	9.5	19	16	16-16.3
M18×1.5	6.5	9.5	20	18	18-18.3
M20×1.5	6.5	10	22	20	20-20.3
M22×1.5	6.5	10	24	22	22-22.3
M24×1.5	6.5	10	27	24	24-24.3
M25×1.5	7	10.5	30	25	25-25.3
M27×1.5	7	10.5	30	27	27-27.3
M30×1.5	7	11	32	30	30-30.3
M32×1.5	8	12.5	41	32	32-32.3
M33×1.5	8	12.5	36	33	33-33.3
M36×1.5	8	12.5	40	36	36-36.3
M40×1.5	8	13	46	40	40-40.3
M42×1.5	8	13	45	42	42-42.3
M44×1.5	9	14	50	44	44-44.3
M48×1.5	9	14	50	48	48-48.3
M50×1.5	9	15	55	50	50-50.3
M56×1.5	9	15	60	56	56-56.3
M60×1.5	10	15	65	60	60-60.3
M63×1.5	10	16.5	70	63	63-63.3
M64×1.5	10	15.5	67	64	64-64.3
M72×2	10	17	75	72	72-72.3
M80×2	15	23	90	80	80-80.3
M90×2	15	23	100	90	90-90.3
M100×2	15	24	110	100	100-100.3
M110×2	15	25	120	110	110-110.3
M120×2	15	25	130	120	120-120.3
M150×2	15	25	160	150	150-150.3

Metal Hexagonal Screw Plug NPT/G Series




Specification

- Material: Brass with Nickel Plated
Sealing: NBR
- Working Temperature: -40°C to 100°C
120°C at short time.
- Protection Rating: IP68
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make
some changes on materials

规格 Thread	螺纹长度 GL mm	本体高度 H mm	扳手直径 mm	螺纹外径 AG mm	开孔尺寸 Panel MountingHole mm
NPT1/4	8	11.5	17	13.616	13.7-14
NPT3/8	15	18.5	20	17.055	17.1-17.4
NPT1/2	13	17	24	21.224	21.3-21.6
NPT3/4	13	17	30	26.569	26.6-26.9
NPT1	16	20.5	41	33.228	33.3-33.6
NPT1 1/4	18	23	46	41.985	42-42.3
NPT1 1/2	18	23	55	48.054	48.1-48.4
NPT2	18	24	65	60.092	60.1-60.4
NPT2 1/2	23	30	75	72.699	72.7-73
NPT3	26	34	100	88.608	88.6-88.9
NPT4	28	38	120	113.973	114-114.5
G1/4	7	10	17	13.157	13.2-13.5
G3/8	8	11.5	20	16.662	16.7-17
G1/2	8	11.5	24	20.995	21-21.3
G3/4	8	11.5	30	26.441	26.5-26.8
G1	10	14.5	41	32.249	33.3-33.6
G1 1/4	10	15	46	41.910	42-42.3
G1 1/2	10	16	55	47.803	47.8-48.1
G2	12	18	65	59.614	59.7-60
G3	18	26	100	87.884	87.9-88.5
G4	22	32	120	113.030	113.1-114

Nylon Cable Gland PG Series




Specification

- Material: Nylon PA
Sealing: NBR
- Working Temperature: -40°C to 100°C
120°C at short time.
- Protection Rating: IP68/IP69K
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make some changes on materials
- Color: Gray, Black and customized

规格 Thread	电缆范围 Cable Range mm	螺纹长度 Thread Length mm	本体高度 Body Height mm	扳手直径 Wrench Diameter mm	螺纹外径 Thread Outer Diameter mm	开孔尺寸 Panel Mounting Hole mm
PG7	3-6.5	8	22	16	12	12-12.3
PG7	2-5	8	22	16	12	12-12.3
PG9	4-8	8	26	19	16	16-16.3
PG9	2-6	8	26	19	16	16-6.3
PG11	5-10	8	27	22	18	18-18.3
PG11	3-7	8	27	22	18	18-18.3
PG13.5	6-12	9	28	24	20	20-20.3
PG13.5	5-9	9	28	24	20	20-20.3
PG16	10-14	10	30	27	22	22-22.3
PG16	7-12	10	30	27	22	22-22.3
PG19	12-15	10	30	27/28	24	24-24.3
PG19	10-12	10	30	27/28	24	24-24.3
PG21	13-18	10	35	33	28	28-28.3
PG21	9-16	10	35	33	28	28-28.3
PG25	16-21	11	34	35/36	30	30-30.3
PG25	13-18	11	34	35/36	30	30-30.3
PG29	18-25	12	40	41/42	37	37-37.3
PG29	13-20	12	40	41/42	37	37-37.3
PG36	22-32	14	48	52/53	47	47-47.3
PG36	20-26	14	48	52/53	47	47-47.3
PG42	32-38	14	49	60/61	54	54-54.3
PG42	25-31	14	49	60/61	54	54-54.3
PG48	37-44	14	50	64/65	59	59-59.3
PG48	29-35	14	50	64/65	59	59-59.3
PG63	42-50	27	60	72	70	70-70.3

Nylon Cable Gland M Series




Specification

- Material: Nylon PA
Sealing: NBR
- Working Temperature: -40°C to 100°C
120°C at short time.
- Protection Rating: IP68/IP69K
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make some changes on materials
- Color: Gray, Black and customized

规格 Thread	电缆范围 Cable Range mm	螺纹长度 Thread Length mm	本体高度 Body Height mm	扳手直径 Wrench Diameter mm	螺纹外径 Thread Outer Diameter mm	开孔尺寸 Panel Mounting Hole mm
M10×1	3-6.5	8	22	15	10	10-10.3
M12×1.5	3-6.5	8	22	16	12	12-12.3
M12×1.5	2-5	8	22	16	12	12-12.3
M14×1.5	4-8	8	26	19	14	14-14.3
M14×1.5	2-6	8	26	19	14	14-14.3
M16×1.5	4-8	8	26	19	16	16-16.3
M16×1.5	2-6	8	26	19	16	16-16.3
M16×1.5	5-10	8	27	22	16	16-16.3
M16×1.5	3-7	8	27	22	16	16-16.3
M18×1.5	5-10	8	27	22	18	18-18.3
M18×1.5	3-7	8	27	22	18	18-18.3
M20×1.5	6-12	9	28	24	20	20-20.3
M20×1.5	5-9	9	28	24	20	20-20.3
M20×1.5	10-14	10	30	27	20	20-20.3
M20×1.5	7-12	10	30	27	20	20-20.3
M22×1.5	10-14	10	30	27	22	22-22.3
M22×1.5	7-12	10	30	27	22	22-22.3
M24×1.5	12-15	10	30	27	24	24-24.3
M24×1.5	10-12	10	30	27	24	24-24.3
M25×1.5	13-18	10	35	33	25	25-25.3
M25×1.5	9-16	10	35	33	25	25-25.3
M27×1.5	13-18	10	35	33	27	27-27.3
M27×1.5	9-16	10	35	33	27	27-27.3
M30×1.5	12-21	11	34	35/36	30	30-30.3
M30×1.5	7-15	11	34	35/36	30	30-30.3
M32×1.5	12-21	11	34	36/37	32	32-32.3
M32×1.5	7-15	11	34	36/37	32	32-32.3
M32×1.5	18-25	12	40	41/42	32	32-32.3
M32×1.5	13-20	12	40	41/42	32	32-32.3
M36×1.5	18-25	12	40	41/42	36	36-36.3
M36×1.5	13-20	12	40	41/42	36	36-36.3
M40×1.5	22-32	14	48	52/53	40	40-40.3
M40×1.5	20-26	14	48	52/53	40	40-40.3
M50×1.5	32-38	14	49	60/61	50	50-50.3
M50×1.5	25-31	14	49	60/61	50	50-50.3
M63×1.5	37-44	14	50	67	63	63-63.3
M63×1.5	29-35	14	50	67	63	63-63.3
M75×2	53-60	25	63	82	75	75-75.3
M75×2	48-55	25	63	82	75	75-75.3

Nylon Cable Gland NPT Series




Specification

- Material: Nylon PA
Sealing: NBR
- Working Temperature: -40°C to 100°C
120°C at short time.
- Protection Rating: IP68/IP69K
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make some changes on materials
- Color: Gray, Black and customized

规格 Thread	电缆范围 Cable Range mm	螺纹长度 Thread Length mm	本体高度 Body Height mm	扳手直径 Wrench Diameter mm	螺纹外径 Thread OD mm	开孔尺寸 Panel Mounting Hole mm
NPT1/4	3-6.5	8	22	15/16	13.7	13.7-14
NPT1/4	2-5	8	22	15/16	13.7	13.7-14
NPT3/8	4-8	15	26	19	17	17-17.3
NPT3/8	2-6	15	26	19	17	17-17.3
NPT1/2	6-12	13	30	24	21.2	21.2-21.5
NPT1/2	5-9	13	30	24	21.2	21.2-21.5
NPT1/2	10-14	13	30	27	21.2	21.2-21.5
NPT1/2	7-12	13	30	27	21.2	21.2-21.5
NPT3/4	13-18	15	35	33	26.2	26.2-26.5
NPT3/4	9-16	15	35	33	26.2	26.2-26.5
NPT1	18-25	16	40	41	33.3	33.3-33.6
NPT1	13-20	16	40	41	33.3	33.3-33.6
NPT1 1/4	18-25	18	40	42/46	42	42-42.3
NPT1 1/4	13-20	18	40	42/46	42	42-42.3
NPT1 1/2	22-32	15	48	52/53	48	48-48.3
NPT1 1/2	20-26	15	48	52/53	48	48-48.3



Nylon Cable Gland G Series




Specification

- Material: Nylon PA
Sealing: NBR
- Working Temperature: -40°C to 100°C
120°C at short time.
- Protection Rating: IP68/IP69K
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make some changes on materials
- Color: Gray, Black and customized

规格 Thread	电缆范围 Cable Range mm	螺纹长度 Thread Length mm	本体高度 Body Height mm	扳手直径 Wrench Diameter mm	螺纹外径 Thread OD mm	开孔尺寸 Panel Mounting Hole mm
G1/4"	3-6.5	8	22	15/16	13.1	13.1-13.4
G1/4"	2-5	8	22	15/16	13.1	13.1-13.4
G3/8"	4-8	15	26	19	16.6	16.6-16.9
G3/8"	2-6	15	26	19	16.6	16.6-16.9
G1/2"	6-12	13	30	24	20.9	20.9-21.2
G1/2"	5-9	13	30	24	20.9	20.9-21.2
G1/2"	10-14	13	30	27	20.9	20.9-20.2
G1/2"	7-12	13	30	27	20.9	20.9-20.2
G3/4"	13-18	15	35	33	26.4	26.4-26.7
G3/4"	9-16	15	35	33	26.4	26.4-26.7
G1"	18-25	16	40	41	33.2	33.2-33.5
G1"	13-20	16	40	41	33.2	33.2-33.5
G1 1/4"	18-25	18	40	42/46	41.9	41.9-42.2
G1 1/4"	13-20	18	40	42/46	41.9	41.9-42.2
G1 1/2"	22-32	15	48	52/53	47.8	47.8-48.1
G1 1/2"	20-26	15	48	52/53	47.8	47.8-48.1
G2"	37-44	15	50	64	59.6	59.6-59.9
G2"	29-35	15	50	64	59.6	59.6-59.9


Nylon Cable Gland Long Thread PG Series



Specification

- Material: Nylon PA
Sealing: NBR
- Working Temperature: -40°C to 100°C
120°C at short time.
- Protection Rating: IP68/IP69K
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make some changes on materials
- Color: Gray, Black and customized

Nylon Cable Gland Long Thread M Series




Specification

- Material: Nylon PA
Sealing: NBR
- Working Temperature: -40°C to 100°C
120°C at short time.
- Protection Rating: IP68/IP69K
- Certificates: CE, RoHS, REACH and so on
- Plz let us know if you wanna make some changes on materials
- Color: Gray, Black and customized

规格 Thread	电缆范围 mm	螺纹长度 GL mm	本体高度 H mm	扳手直径 mm	螺纹外径 AG mm	开孔尺寸 Panel Mounting Hole mm
PG7	3-6.5	15	22	15/16	12.5	12.5-12.8
PG7	2-5	15	22	15/16	12.5	12.5-12.8
PG9	4-8	15	26	19	15.2	15.2-15.5
PG9	2-6	15	26	19	15.2	15.2-15.5
PG11	5-10	15	27	22	18.6	18.6-18.9
PG11	3-7	15	27	22	18.6	18.6-18.9
PG13.5	6-12	15	28	24	20.4	20.4-20.7
PG13.5	5-9	15	28	24	20.4	20.4-20.7
PG16	10-14	15	30	27	22.5	22.5-22.8
PG16	7-12	15	30	27	22.5	22.5-22.8
PG21	13-18	15	35	33	28.3	28.3-28.6
PG21	9-16	15	35	33	28.3	28.3-28.6
PG29	18-25	18	40	41/42	37	37-37.3
PG29	13-20	18	40	41/42	37	37-37.3
PG36	22-32	18	48	52/53	47	47-47.3
PG36	20-26	18	48	52/53	47	47-47.3
PG42	32-38	18	49	60/61	54	54-54.3
PG42	25-31	18	49	60/61	54	54-54.3
PG48	37-44	18	50	64	59.3	59.3-59.6
PG48	29-35	18	50	64	59.3	59.3-59.6

规格 Thread	电缆范围 mm	螺纹长度 GL mm	本体高度 H mm	扳手直径 mm	螺纹外径 AG mm	开孔尺寸 Panel Mounting Hole mm
M12×1.5	3-6.5	15	22	15/16	12	12-12.3
M12×1.5	2-5	15	22	15/16	12	12-12.3
M16×1.5	4-8	15	26	19	16	16-16.3
M16×1.5	2-6	15	26	19	16	16-16.3
M16×1.5	5-10	15	27	22	16	16-16.3
M16×1.5	3-7	15	27	22	16	16-16.3
M18×1.5	5-10	15	27	22	18	18-18.3
M18×1.5	3-70	15	27	22	18	18-18.3
M20×1.5	6-12	15	28	24	20	20-20.3
M20×1.5	5-9	15	28	24	20	20-20.3
M20×1.5	10-14	15	30	27	20	20-20.3
M20×1.5	7-12	15	30	27	20	20-20.3
M22×1.5	10-14	15	30	27	22	22-22.3
M22×1.5	7-12	15	30	27	22	22-22.3
M25×1.5	13-18	15	35	33	25	25-22.3
M25×1.5	9-16	15	35	33	25	25-25.3
M32×1.5	18-25	15	40	41/42	32	32-32.3
M32×1.5	13-20	15	40	41/42	32	32-32.3
M40×1.5	19-28	18	43	45/46	40	40-40.3
M40×1.5	15-23	18	43	45/46	40	40-40.3
M40×1.5	22-32	18	48	52/53	40	40-40.3
M40×1.5	20-26	18	48	52/53	40	40-40.3
M50×1.5	27-35	18	48	55/56	50	50-50.3
M50×1.5	22-29	18	48	55/56	50	50-50.3
M50×1.5	32-38	18	49	60/61	50	50-50.3
M50×1.5	25-31	18	49	60/61	50	50-50.3
M63×1.5	37-44	18	50	64	63	63-63.3
M63×1.5	29-35	18	50	64	63	63-63.3
M63×1.5	34-45	19	57	67/68	63	63-63.3
M63×1.5	28-39	19	57	67/68	63	63-63.3

Snap Bushing SB Series

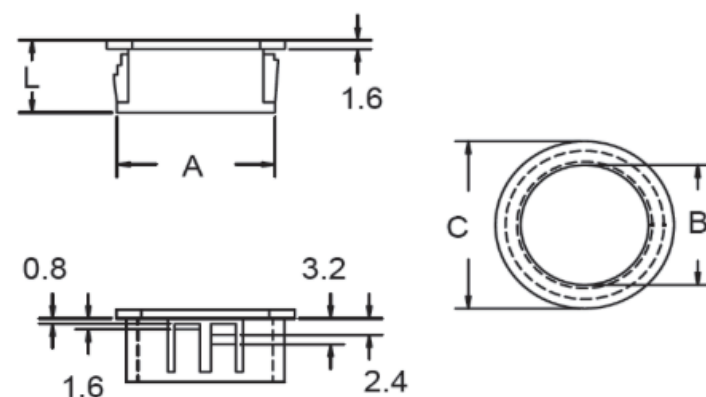


Specification

- Material: Nylon 66
- Flammability Rating: 94UL-V2
- Certificates: UL, CE, RoHS
- Color: Black, White and customized



Item No.	Mounting Hole A(mm)	Max. cable range B(mm)	Covering C(mm)	Height L(mm)	Packing
SB-8	7.8	5.8	10.5	8	100pcs
SB-10	9.5	6.4	12	10.3	
SB-13	12.7	8	15	10.3	
SB-16	15.9	12.7	18.6	10.3	
SB-19	19	14.3	21.7	10.3	
SB-22	22.2	17.5	24.2	11.5	
SB-26	25.5	19.1	28.5	11.5	
SB-28	28	23	30.7	11.5	
SB-30	30	24.1	33.3	11.5	
SB-35	34.2	29.3	37.5	11.3	
SB-38	38.1	29	42.1	11.4	
SB-45	44.5	35.4	47.8	11.6	
SB-50	50.1	41.6	54.6	11.8	

Snap Bushing OSB Series

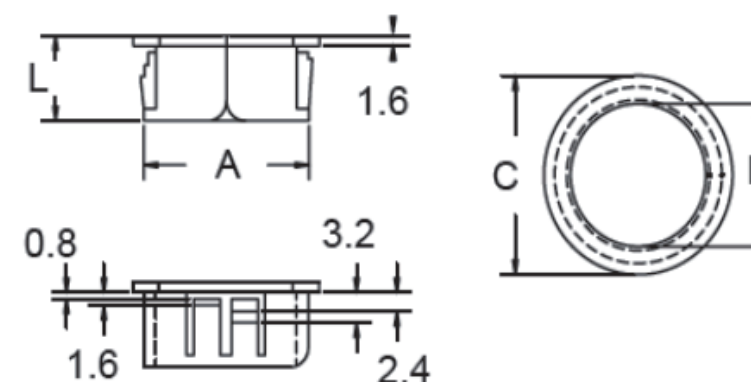


Specification

- Material: Nylon 66
- Flammability Rating: 94UL-V2
- Certificates: UL, CE, RoHS
- Color: Black, White and customized



Item No.	Mounting Hole A(mm)	Max. cable range B(mm)	Covering C(mm)	Height L(mm)	Packing
OSB-10	9	6	11.8	9.8	100pcs
OSB-13	12.5	7.5	15.1	10.3	
OSB-16	15.5	11.2	18.5	10.3	
OSB-19	18.4	12.5	21	10.3	
OSB-22	22	17	24.6	10.3	
OSB-26	25.5	20	28.4	10.6	

Snap Bushing RSB Series

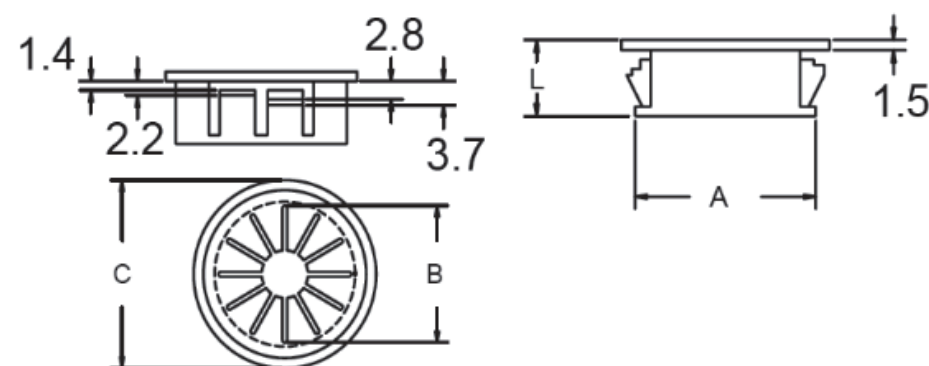


Specification

- Material: Nylon 66
- Flammability Rating: 94UL-V2
- Certificates: UL, CE, RoHS
- Color: Black, White and customized



Item No.	Mounting Hole A(mm)	Max. cable rangeB(mm)	Covering C(mm)	Height L(mm)	Packing
RSB-16	15.9	11.1	18.3	10	100pcs
RSB-19	18.8	12.7	21.8	10	
RSB-22	22.2	14.3	23.8	11.5	
RSB-25	25.3	20.4	28.5	11.3	
RSB-28	27.6	22.4	30.8	11.3	
RSB-30	27.6	22.4	30.8	11.3	
RSB-35	34.2	29.3	37.5	11.3	
RSB-38	38	31	31	11.2	
RSB-45	44.5	40	49.7	11.8	
RSB-50	50.1	45	54.6	11.8	

Hole Plug HP Series

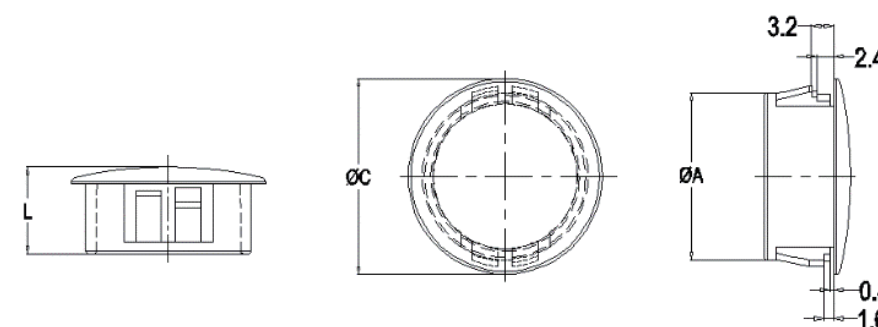


Specification

- Material: Nylon 66
- Flammability Rating: 94UL-V2
- Certificates: UL, CE, RoHS
- Color: Black, White and customized
- Features: Oil and tor resistant



Item No.	Mounting Hole A	Covering C	Height L	Packing
HP-8	7.9	10.3	8.1	100pcs
HP-10	9.5	13	10.5	
HP-13	12.7	16.5	10.9	
HP-16	15.9	19.8	10	
HP-19	19	22.9	10	
HP-22	22.2	25.8	11.3	
HP-25	25.3	29	11.6	
HP-28	27.6	30.8	11.3	
HP-30	30	34.2	12	
HP-35	34.2	37.5	11.3	
HP-38	38.1	42.1	11.2	
HP-45	44.5	49.7	11.8	
HP-50	50.1	54.6	11.8	

Relief Bushing HPM Series

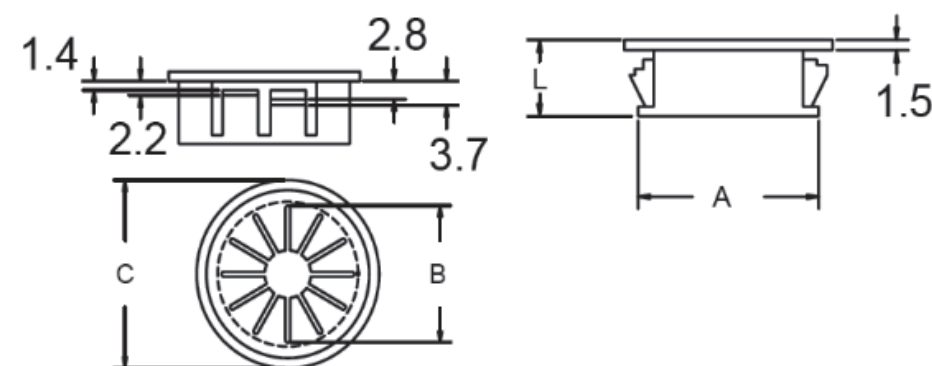


Specification

- Material: Nylon 66
- Flammability Rating: 94UL-V2
- Certificates: UL, CE, RoHS
- Color: Black, White and customized



Item No.	Apply to Screw cap	W	W1	T	Packing
HPM-6	M6	9.5	5.8	7.5	100PCS
HPM-8	M8	14.2	7.6	8	
HPM-12	M12	17	10	11	

Screw Plug SP Series

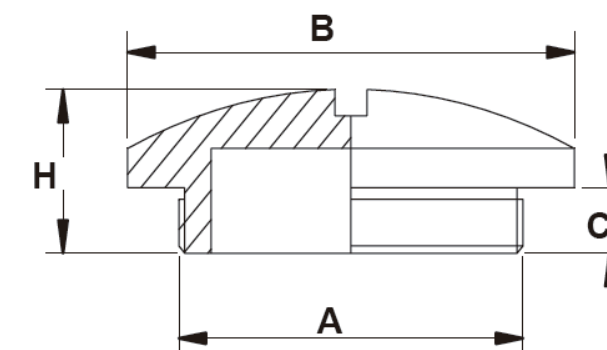


Specification

- Material: Nylon 66
- Flammability Rating: 94UL-V2
- Certificates: UL, CE, RoHS
- Color: Black, White and customized



Item No.	Thread	Thread O.D. A	Panel Mounting Hole	Thread Length C	Thread Length H	size B	Std.Pkg. pcs
Metric thread SP-M							
SP-M12	M12*1.5	12	12-12.3	9	12.5	15	100PCS
SP-M16	M16*1.5	16	16-16.3	9	13	19	
SP-M18	M18*1.5	18	18-18.3	9	13	22	
SP-M20	M20*1.5	20	20-20.3	9	13	25	
SP-M22	M22*1.5	22	22-22.3	10.5	15	27	
SP-M25	M25*1.5	25	25-25.3	10.5	15.5	30	50PCS
SP-M27	M27*1.5	27	27-27.3	10.5	15.5	33	
SP-M32	M32*1.5	32	32-32.3	10.5	16	38	
SP-M40	M40*1.5	40	40-40.3	11.5	16	46	30PCS
SP-M50	M50*1.5	50	50-50.3	13.5	18	56	
SP-M63	M63*1.5	63	63-63.3	14	19	68	
Germany thread NSP-PG							
SP-PG7	PG 7	12.5	12.5-12.8	9	12.2	15	100PCS
SP-PG9	PG 9	15.2	15.2-15.8	9	13	19	
SP-PG11	PG 11	18.6	18.6-18.9	9	13	22	
SP-PG13.5	PG 13.5	20.4	20.4-20.7	9	13	25	
SP-PG16	PG 16	22.5	22.5-22.8	10.5	15	27	
SP-PG21	PG 21	28.3	28.3-28.7	10.5	15	33	30PCS
SP-PG29	PG 29	37	37.0-37.4	11.5	16	44	
SP-PG36	PG 36	47	47.0-47.4	13.5	18	55	
SP-PG42	PG 42	54	54.0-54.4	13.5	18.5	62	
SP-PG48	PG 48	59.3	59.3-59.7	14.5	19.5	68	

Loom Tube LT Series

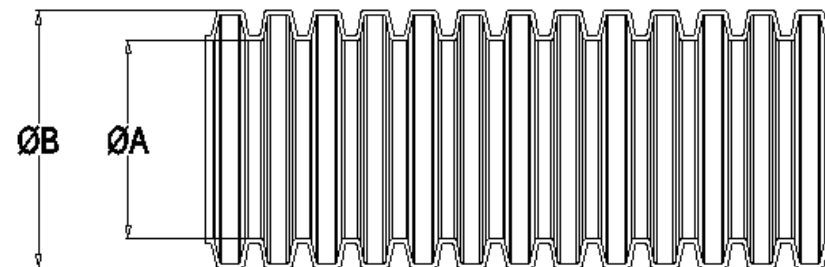



Specification

- Material: PA (Polyamide)
- Flammability Rating: 94UL-V2
- Certificates: UL, CE, RoHS
- Color: Black, White and G
- Work Temperature: -40 °C to 125 °C, 150 °C in short time



Item No .	Sizes	I.D. A	O.D. B	Packing M
LT-07	1/4"	6.5	10	100M
LT-08	9/32"	8	11.5	100M
LT-10	5/16"	10	13	100M
LT-12	-	12	15.8	100M
LT-15	3/8"	14.3	18.5	100M
LT-17	1/2"	17	21.2	100M
LT-20	-	20	25	50M
LT-23	3/4"	23	28.5	50M
LT-29	1"	29	34.5	50M
LT-36	1 1/4"	36	42.5	50M
LT-48	2"	48	54.5	25M
LT-63	2 1/2"	63	74	20M

Loom Tube LT-C Series

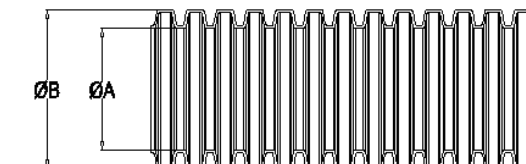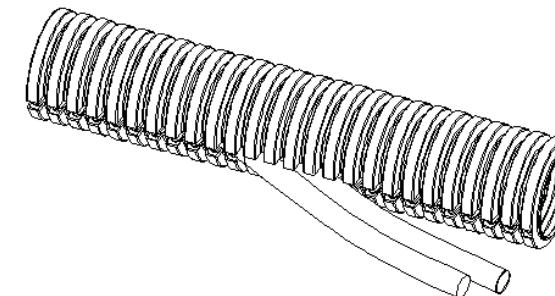


Specification

- Material: PA (Polyamide)
- Flammability Rating: 94UL-V2
- Certificates: UL, CE, RoHS
- Color: Black, White and G
- Work Temperature: -40 °C to 125 °C, 150 °C in short time



Item No .	Sizes	I.D. A	O.D. B	Packing M
LT-07C	1/4"	6.5	10	100M
LT-08C	9/32"	8	11.5	100M
LT-10C	5/16"	10	13	100M
LT-12C	-	12	15.8	100M
LT-15C	3/8"	14.3	18.5	100M
LT-17C	1/2"	17	21.2	100M
LT-20C	-	20	25	50M
LT-23C	3/4"	23	28.5	50M
LT-29C	1"	29	34.5	50M
LT-36C	1 1/4"	36	42.5	50M
LT-48C	2"	48	54.5	25M
LT-63C	2 1/2"	63	74	20M

Spiral Wrapping Bands SWBS Series

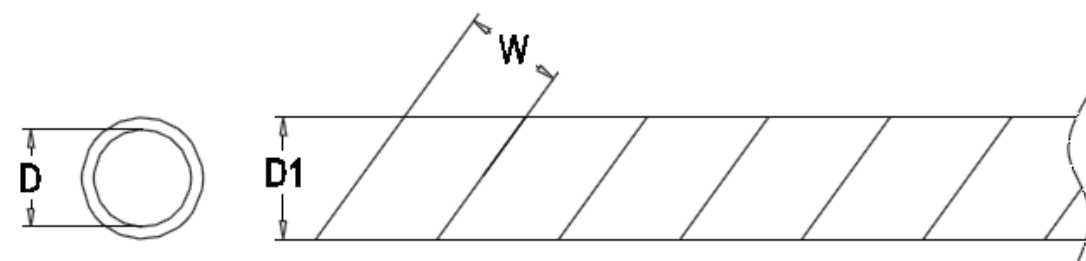


Specification

- Material: PE
- Certificates: RoHS
- Color: Black, White



Item No.	Inner dia.D	Outer dia.D1	Screw W	Wrapping range	Packing
SWBS-4	3.5	4.5	5	3-10	50M
SWBS-6	4.8	6	6-7	4-25	10M
SWBS-8	6.5	8	8-10	6-30	10M
SWBS-10	8.5	10	11-12	7.5-30	10M
SWBS-12	10.5	12	12-13	9-32	10M
SWBS-16	13	15	16-17	12-35	10M
SWBS-20	16.5	19	19-20	15-50	10M
SWBS-24	21.5	24	29-31	20-100	10M
SWBS-30	27	30	30.0-32	26-130	10M

Spiral Wrapping Bands SWB Series

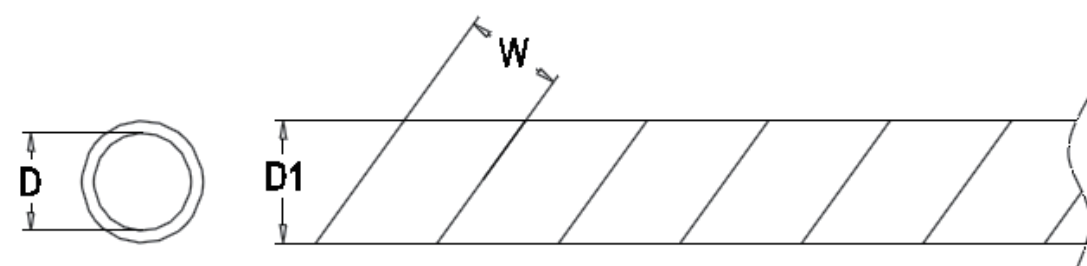


Specification

- Material: PE
- Certificates: RoHS
- Color: Black, White



Item No.	Inner dia.D	Outer dia.D1	Screw W	Wrapping range	Packing
SWB-6	4	6	7	4-50	10M
SWB-8	6	8	10.8	6-60	10M
SWB-10	7.5	10	11.4	7.5-60	10M
SWB-12	9	12	13.9	9-65	10M
SWB-16	13	16	15	12-70	10M
SWB-20	16	20	18.2	15-100	10M
SWB-24	21	25	19.6	20-130	10M

Braided Sleeving PET Series

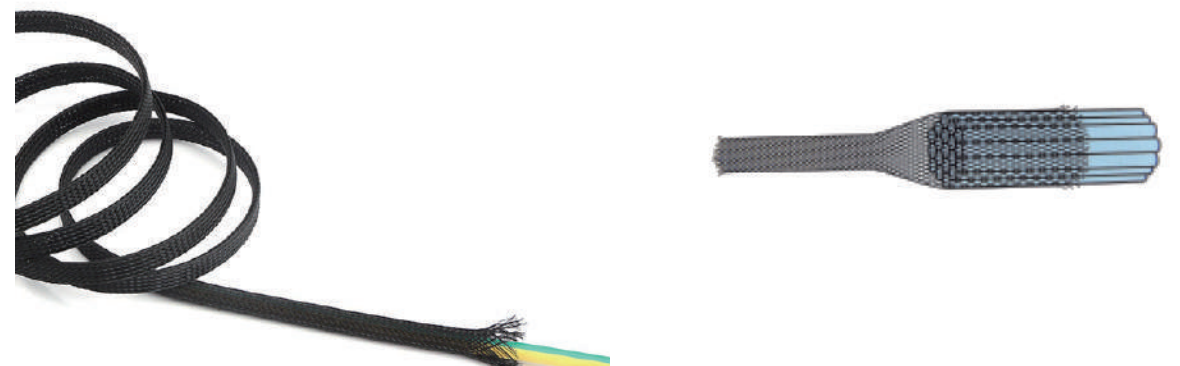


Specification

- Material: PET
- Work Temperature: -75 C -125 C
- Color: Black
- Fireproof: 94V-2
- Certificates: RoHS



Item No.	SIZE	Width dia.	Wrapping range	Packing
PET-2	2	0.2	1.5-2.4	600M
PET-3	3	0.2	2.4-6.4	500M
PET-6	6	0.25	3.2-11.1	500M
PET-8	8	0.2	6.4-12.7	500M
PET-10	10	0.2	4.8-15.9	400M
PET-12	12	0.2	6.4-19.1	400M
PET-16	16	0.2	9.5-25.4	400M
PET-20	20	0.2	12.7-31.8	300M
PET-25	25	0.25	15.9-38.1	200M
PET-32	32	0.25	19.1-44.5	100M
PET-38	38	0.25	25.4-63	100M
PET-45	45	0.25	32-70	50M
PET-51	51	0.25	40-90	50M
PET-64	64	0.25	44.5-114	30M
PET-76	76	0.25	63.5-120	30M

Braided Sleeving BS Series

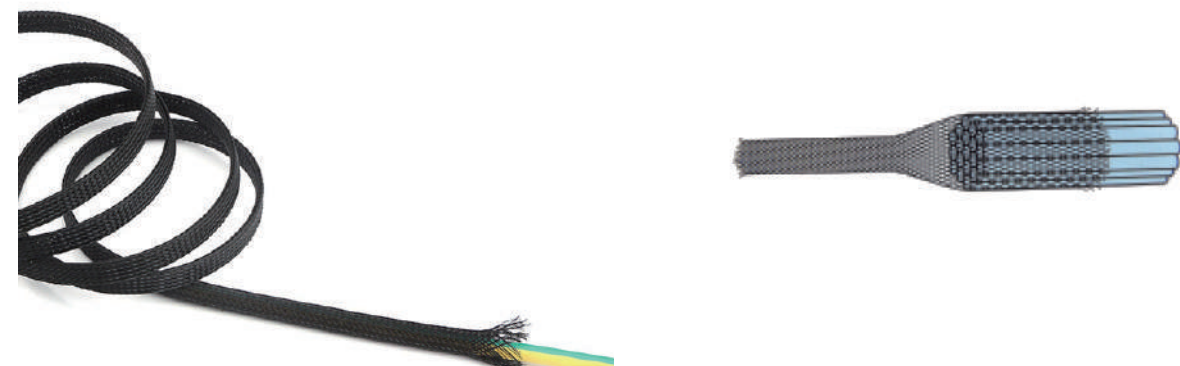


Specification

- Material: PET
- Certificates: RoHS
- Color: Black
- Fireproof: VW-1
- Work Temperature: -50 C -150 C



Item No.	SIZE	Width dia.	Wrapping range	Packing
PET-2	2	0.2	1-5	500M
PET-3	3	0.2	1-6	500M
PET-4	4	0.25	2-8	500M
PET-5	5	0.2	3-10	500M
PET-6	6	0.2	4-12	500M
PET-7	7	0.2	5-14	500M
PET-8	8	0.2	6-15	500M
PET-10	10	0.2	7-20	500M
PET-12	12	0.25	8-24	250M
PET-14	14	0.25	10-28	250M
PET-16	16	0.25	11-26	250M
PET-18	18	0.25	11-32	250M
PET-20	20	0.25	12-38	250M
PET-25	25	0.25	14-39	250M
PET-28	28	0.25	15-42	150M
PET-32	32	0.25	16-46	150M
PET-35	35	0.25	18-50	150M
PET-38	38	0.25	20-57	100M
PET-40	40	0.25	22-60	100M
PET-45	45	0.25	25-70	100M
PET-50	50	0.38	30-85	50M
PET-60	60	0.38	35-95	50M
PET-70	70	0.38	40-110	50M

Heat-shrink Tube HST Series



Specification

- Material: PE
- Work Temperature: -55 C - 125 C
- Color: Black,White, Red, Blue, Yellow, Green, Brown, Gray
- Fireproof: VW-1
- Ratio: 2:1




Item No.	Size	As Supplied (mm)		After Shrinkage (mm)		Std.Pkg. M	Suitable scope
		Inside Diameter(min.)	Wall Thickness(nominal)	Inside Diameter (max.)	Wall Thickness (nominal)		
HST-0.6	Φ0.6	0.9±0.2	0.10±0.05	≤0.40	0.33±0.10	200	0.5-0.7
HST-0.8	Φ0.8	1.0±0.2	0.15±0.05	≤0.50	0.33±0.10	200	0.6-0.8
HST-1	Φ1.0	1.5±0.2	0.15±0.05	≤0.65	0.33±0.10	200	0.75-0.9
HST-1.5	Φ1.5	2.0±0.2	0.15±0.05	≤0.65	0.33±0.10	200	0.95-1.4
HST-2	Φ2.0	2.5±0.2	0.18±0.05	≤1.00	0.45±0.10	200	1.1-1.8
HST-2.5	Φ2.5	3.0±0.2	0.18±0.05	≤1.30	0.45±0.10	200	1.4-2.3
HST-3	Φ3.0	3.5±0.2	0.18±0.05	≤1.50	0.45±0.10	200	1.6-2.7
HST-3.5	Φ3.5	4.0±0.2	0.22±0.05	≤1.80	0.45±0.10	200	1.9-3.2
HST-4	Φ4.0	4.5±0.2	0.25±0.05	≤2.00	0.45±0.10	200	2.1-3.6
HST-4.5	Φ4.5	5.0±0.2	0.25±0.05	≤2.30	0.50±0.10	100	2.4-4.0
HST-5	Φ5.0	5.5±0.2	0.25±0.05	≤2.50	0.55±0.10	100	2.6-4.5
HST-5.5	Φ5.5	6.0±0.2	0.25±0.05	≤2.75	0.55±0.10	100	2.8-5.0
HST-6	Φ6.0	6.5±0.2	0.28±0.05	≤3.00	0.55±0.10	100	3.1-5.4
HST-7	Φ7.0	7.5±0.3	0.28±0.05	≤3.50	0.55±0.10	100	3.7-6.3
HST-8	Φ8.0	8.5±0.3	0.28±0.05	≤4.00	0.60±0.10	100	4.2-7.2
HST-9	Φ9.0	9.5±0.3	0.30±0.08	≤4.50	0.60±0.10	100	4.7-8.0
HST-10	Φ10	10.8±0.3	0.30±0.08	≤5.00	0.60±0.10	100	5.2-9.0
HST-11	Φ11	11.5±0.3	0.30±0.08	≤5.50	0.60±0.10	100	5.7-10
HST-12	Φ12	12.5±0.3	0.30±0.08	≤6.00	0.65±0.10	100	6.2-11
HST-13	Φ13	13.5±0.3	0.35±0.10	≤6.50	0.65±0.10	100	6.7-12



HST-14	Φ14	14.5±0.3	0.35±0.10	≤7.00	0.70±0.10	100	7.3-13
HST-15	Φ15	15.5±0.4	0.40±0.12	≤7.50	0.75±0.10	100	7.8-14
HST-16	Φ16	16.5±0.4	0.40±0.12	≤8.00	0.75±0.10	100	8.3-15
HST-17	Φ17	17.5±0.4	0.40±0.12	≤8.50	0.75±0.10	100	8.8-16
HST-18	Φ18	19.0±0.5	0.40±0.15	≤9.00	0.80±0.15	100	9.3-17
HST-20	Φ20	22.0±0.5	0.40±0.15	≤10.00	0.82±0.15	100	10.4-19
HST-22	Φ22	24.0±0.5	0.40±0.15	≤11.00	0.82±0.15	100	11.4-21
HST-25	Φ25	26.0±0.5	0.55±0.15	≤12.50	1.00±0.15	50	12.8-24
HST-28	Φ28	29.0±0.5	0.55±0.15	≤14.00	1.00±0.15	50	14.4-29
HST-30	Φ30	31.5±1.0	0.55±0.15	≤15.00	1.05±0.15	50	16-29
HST-35	Φ35	36.5±1.0	0.55±0.1	≤17.50	1.15±0.15	50	18-34
HST-40	Φ40	41.5±1.0	0.55±0.15	≤20.00	1.20±0.15	50	21-39
HST-50	Φ50	51.0±1.0	0.55±0.15	≤25.00	1.20±0.15	25	26-49
HST-60	Φ60	60.0±1.0	0.60±0.15	≤31.00	1.30±0.20	25	35-55
HST-70	Φ70	70.0±1.0	0.65±0.15	≤36.00	1.47±0.20	25	40-65
HST-80	Φ80	80.0±1.0	0.65±0.15	≤41.00	1.47±0.20	25	45-75
HST-90	Φ90	90.5±1.0	0.65±0.15	≤46.00	1.47±0.20	25	50-88
HST-100	Φ100	100.5±1.0	0.65±0.20	≤51.00	1.47±0.20	25	55-95
HST-120	Φ120	120.5±1.0	0.65±0.20	≤61.00	1.56±0.20	25	65-115
HST-150	Φ150	150.5±1.0	0.65±0.20	≤76.00	1.56±0.20	25	80-145
HST-180	Φ180	180.5±1.0	0.65±0.30	≤91.00	1.56±0.20	25	95-175

Heat-shrink Tube HST Series



Specification

- Material: PE
- Work Temperature: -55°C - 125°C
- Color: Black, White, Red, Blue, Yellow, Green, Brown, Gray
- Fireproof: VW-1
- Ratio: 2:1



Item No.	Size	As Supplied (mm)		Wall Thickness Dual-Wall	After Shrinkage (mm)		Std.Pkg. M	Suitable scope
		Inside Diameter(min.)	Lay Flat		Inside Diameter (max.)	Wall Thickness (nominal)		
HST1-2X-1.6	Φ1.6	2.00±0.20	3.70±0.30	0.48±0.10	≤0.79	0.45±0.06	200	0.5-0.7
HST1-2X-2.4	Φ2.4	2.79±0.20	5.00±0.30	0.48±0.10	≤1.18	0.49±0.06	200	0.6-0.8
HST1-2X-3.2	Φ3.2	3.64±0.23	6.30±0.40	0.48±0.10	≤1.59	0.51±0.06	200	0.75-0.9
HST1-2X-4.8	Φ4.8	5.26±0.25	8.90±0.40	0.49±0.10	≤2.36	0.54±0.06	200	0.95-1.4
HST1-2X-6.4	Φ6.4	6.92±0.28	11.5±0.40	0.5±0.10	≤3.18	0.56±0.06	200	1.1-1.8
HST1-2X-9.5	Φ9.5	10.2±0.32	16.7±0.50	0.51±0.11	≤4.75	0.59±0.06	200	1.4-2.3
HST1-2X-12.7	Φ12.7	13.5±0.36	21.8±0.60	0.52±0.11	≤6.35	0.60±0.07	200	1.6-2.7
HST1-2X-19	Φ19.1	20.1±0.40	32.2±0.60	0.53±0.11	≤9.53	0.62±0.07	200	1.9-3.2
HST1-2X-25	Φ25.4	26.7±0.45	42.5±0.70	0.55±0.12	≤12.7	0.63±0.07	200	2.1-3.6
HST1-2X-38	Φ38.1	39.8±0.51	63.2±0.80	0.57±0.12	≤19.1	0.64±0.07	100	2.4-4.0
HST1-2X-51	Φ50.8	53.0±0.56	83.9±0.90	0.58±0.13	≤25.4	0.64±0.08	100	2.6-4.5
HST1-2X-76	Φ76	79.4±0.56	125.3±1.0	0.59±0.13	≤38.1	0.64±0.09	100	2.8-5.0

Heat-shrink Tube Ultra Thin Wall HST-CB Series



Specification

- Material: PE
- Certificates: RoHS
- Color: Black, White, Red, Blue, Yellow, Green, Brown, Gray
- Work Temperature: -50°C - 150°C
- Fireproof: VW-1
- Ratio: 2:1

Item No.	Size mm	Pro-shrinking		After shrinking		Std.Pkg. M	Suitable scope
		Inner D	Thickness W	Inner D	Thickness W		
HST-CB-1	Φ1.0	1.4±0.2	0.13±0.05	≤0.65	0.20±0.10	200	0.7-1.0
HST-CB-1.5	Φ1.5	1.9±0.2	0.13±0.05	≤0.85	0.20±0.10	200	0.9-1.4
HST-CB-2.0	Φ2.0	2.4±0.2	0.13±0.05	≤1.00	0.22±0.10	200	1.1-1.8
HST-CB-2.5	Φ2.5	2.9±0.2	0.13±0.05	≤1.30	0.25±0.10	200	1.4-2.3
HST-CB-3.0	Φ3.0	3.4±0.2	0.13±0.05	≤1.50	0.28±0.10	200	1.6-2.7
HST-CB-3.5	Φ3.5	3.9±0.2	0.13±0.05	≤1.80	0.28±0.10	200	1.9-3.2
HST-CB-4.0	Φ4.0	4.4±0.2	0.15±0.05	≤2.00	0.30±0.10	200	2.1-3.6
HST-CB-4.5	Φ4.5	4.9±0.2	0.15±0.05	≤2.30	0.30±0.10	100	2.4-4.0
HST-CB-5.0	Φ5.0	5.5±0.2	0.15±0.05	≤2.50	0.32±0.10	100	2.6-4.5
HST-CB-6.0	Φ6.0	6.5±0.2	0.15±0.05	≤3.00	0.32±0.10	100	3.1-5.4
HST-CB-7.0	Φ7.0	7.5±0.3	0.15±0.05	≤3.50	0.32±0.10	200	3.7-6.3
HST-CB-8.0	Φ8.0	8.5±0.3	0.15±0.05	≤4.00	0.32±0.10	200	4.2-7.2
HST-CB-9.0	Φ9.0	9.5±0.3	0.15±0.05	≤4.50	0.35±0.10	200	4.7-8.0
HST-CB-10	Φ10	10.5±0.3	0.15±0.05	≤5.00	0.35±0.10	200	5.2-9.0
HST-CB-11	Φ11	11.5±0.3	0.18±0.05	≤5.50	0.40±0.10	200	5.7-10.0
HST-CB-12	Φ12	12.5±0.3	0.20±0.05	≤6.00	0.40±0.10	200	6.2-11
HST-CB-13	Φ13	13.5±0.3	0.20±0.05	≤6.50	0.40±0.10	200	6.7-12
HST-CB-14	Φ14	14.5±0.3	0.20±0.05	≤7.00	0.60±0.10	200	7.3-13
HST-CB-15	Φ15	15.5±0.4	0.20±0.05	≤7.50	0.40±0.10	200	7.8-14
HST-CB-16	Φ16	16.5±0.4	0.22±0.05	≤8.00	0.40±0.10	200	8.3-15
HST-CB-17	Φ17	17.5±0.4	0.22±0.05	≤8.50	0.40±0.10	200	8.8-16
HST-CB-18	Φ18	18.5±0.4	0.22±0.05	≤9.00	0.42±0.10	200	9.3-17
HST-CB-20	Φ20	20.5±0.5	0.25±0.05	≤10.0	0.45±0.10	200	10.5-19
HST-CB-22	Φ22	22.5±0.5	0.25±0.05	≤11.0	0.45±0.10	200	11.5-20.5
HST-CB-25	Φ25	25.0±0.5	0.25±0.05	≤12.5	0.45±0.15	100	13-24

Heat-shrink Tube Dual-Wall Inner Glue HSTD-3X Series



Specification

- Material: PE
- Work Temperature: -80℃-120℃
- Color: Black,White, Red, Blue, Yellow, Green, Brown, Gray
- Fireproof: VW-1
- Ratio: 3:1



Metric inner dia.		Pro-shrinking		After shrinking		Std.Pkg.	Suitable scope
		Inner D	Thickness W	Inner D1	Thickness W		
HSTD--01	1/8	3.2±0.6	0.30±0.08	≤1.0	0.95±0.08	200	1.0~3.1
HSTD--02	3/16	4.8±0.6	0.46±0.08	≤1.6	1.10±0.08	100	1.8~4.6
HSTD--03S	1/4	6.4±0.6	0.50±0.08	≤2.2	1.20±0.08	100	2.4~6.4
HSTD--03L	5/16	7.9±0.6	0.52±0.08	≤2.7	1.30±0.08	100	2.9~7.7
HSTD--04	3/8	9.5±0.6	0.55±0.08	≤3.2	1.40±0.08	50	3.4~9.4
HSTD--05	1/2	12.7±0.6	0.68±0.08	≤4.2	1.50±1.0	1.22M/Branch	4.4~12.5
HSTD--06	5/8	15.0±0.6	0.71±0.10	≤5.2	1.80±1.0	1.22M/Branch	5.4~14.8
HSTD--07	3/4	19.0±0.8	0.76±0.10	≤6.3	2.00±1.0	1.22M/Branch	6.5~18.8
HSTD--11	1	25.4±0.8	0.78±0.10	≤8.5	2.10±1.0	1.22M/Branch	8.8~25
HSTD--13	1 1/4	30.0±0.8	0.80±0.10	≤10.2	2.20±1.0	1.22M/Branch	11~30
HSTD--15	1 1/2	≥39	0.85±0.10	≤13.5	2.40±1.0	1.22M/Branch	14~40
HSTD--17	2	≥50	0.95±0.10	≤17.0	2.80±1.0	1.22M/Branch	14~44
HSTD--20	2	≥52	0.95±0.10	≤17.0	3.00±1.0	1.22M/Branch	18~49
HSTD--23	2 1/2	≥64	0.95±0.10	≤21.0	3.00±0.15	1.22M/Branch	22~62
HSTD--27	3	≥76	1.00±0.15	≤25.0	3.20±0.15	1.22M/Branch	26~75
HSTD--35	3 1/2	≥90	1.00±0.15	≤30.0	3.30±0.15	1.22M/Branch	32~88
HSTD--40	4	≥100	1.20±0.1	≤34.0	3.50±0.15	1.22M/Branch	36~99
HSTD--50	5	≥125	1.20±0.15	≤42.0	3.50±0.15	1.22M/Branch	44~125

Heat-shrink Tube Yellow/Green HST-YG Series




Specification

- Material: PE
- Certificates: RoHS
- Color: Yellow/Green
- Fireproof: VW-1
- Ratio: 3:1, 2:1
- Work Temperature: -55℃-125℃



Item No.	Size(mm)	As supplied		After Shrinkage(mm)		Standard length (m/spool)
		Inside diameter(min.)	Wall Thickness (nominal)	Inside diameter(min.)	Wall Thickness (nominal)	
HST-1.6YG2	1/16	1.6	0.2	0.8	0.36	200
HST-2.4YG2	3/32	2.4	0.25	1.2	0.44	200
HST-3.2YG2	1/8	3.2	0.25	1.6	0.44	200
HST-4.8YG2	3/16	4.8	0.25	2.4	0.44	200
HST-6.4YG2	1/4	6.4	0.3	3.2	0.56	100
HST-8YG2	5/16	8	0.3	4	0.56	100
HST-9.5YG2	3/8	9.5	0.3	4.8	0.56	100
HST-12.7YG2	1/2	12.7	0.35	6.4	0.56	100
HST-15.9YG2	3/4	15.9	0.38	8	0.68	100
HST-19.1YG2	1	19.1	0.4	9.5	0.77	50
HST-25.4YG2	1 1/4	25.4	0.45	12.7	0.87	50
HST-38.1YG2	1 1/2	38.1	0.5	19	0.97	50
HST-50.8YG2	2	50.8	0.55	25.4	0.97	50

Heat-shrink Tube Yellow/Green HST-Y/G Series



Specification

- Material: PE
- Work Temperature: -55°C - 125°C
- Color: Yellow/Green
- Fireproof: VW-1
- Ratio: 2:1



Item No.	Metric inner dia.	As Supplied(mm)		After Shrinkage (mm)		Std.Pkg. M	Suitable scope
		Inside Diameter (min.)	Wall Thickness (nominal)	Inside Diameter (max.)	Wall Thickness (nominal)		
HST-1YG	Φ1.0	1.5±0.3	0.15±0.08	≤0.70	0.28±0.10	200	0.75-0.9
HST-1.5YG	Φ1.5	2.0±0.3	0.15±0.08	≤0.90	0.28±0.10	200	0.75-0.9
HST-2YG	Φ2.0	2.5±0.3	0.18±0.08	≤1.00	0.40±0.10	200	1.1-1.8
HST-2.5YG	Φ2.5	3.0±0.3	0.18±0.08	≤1.30	0.40±0.10	200	1.35-2.3
HST-3YG	Φ3.0	3.5±0.4	0.18±0.08	≤1.50	0.40±0.10	200	1.6-2.7
HST-3.5 YG	Φ3.5	4.0±0.4	0.22±0.08	≤1.80	0.42±0.10	200	1.85-3.2
HST-4YG	Φ4.0	4.5±0.4	0.25±0.08	≤2.00	0.45±0.10	200	2.1-3.6
HST-4.5YG	Φ4.5	5.0±0.4	0.25±0.08	≤2.30	0.50±0.10	100	2.35-4.0
HST-5YG	Φ5.0	5.5±0.4	0.25±0.08	≤2.50	0.55±0.10	100	2.6-4.5
HST-6YG	Φ6.0	6.5±0.4	0.28±0.08	≤3.00	0.55±0.10	100	3.1-5.4
HST-7YG	Φ7.0	7.5±0.4	0.28±0.08	≤3.50	0.55±0.10	100	3.7-6.3
HST-8YG	Φ8.0	8.5±0.5	0.28±0.08	≤4.00	0.60±0.10	100	4.2-7.2
HST-9YG	Φ9.0	9.5±0.5	0.30±0.10	≤4.50	0.60±0.10	100	4.7-8.0
HST-10YG	Φ10	10.8±0.5	0.30±0.10	≤5.00	0.60±0.10	100	5.2-9.0
HST-11YG	Φ11	11.5±0.5	0.30±0.10	≤5.50	0.60±0.10	100	5.7-10
HST-12YG	Φ12	12.5±0.5	0.30±0.10	≤6.00	0.65±0.10	100	6.2-11



HST-13YG	Φ13	13.5±0.5	0.35±0.12	≤6.50	0.65±0.10	100	6.7-12
HST-14YG	Φ14	14.5±0.5	0.35±0.12	≤7.00	0.70±0.10	100	7.3-13
HST-15YG	Φ15	15.5±0.6	0.40±0.12	≤7.50	0.75±0.10	100	7.8-14
HST-16YG	Φ16	16.5±0.6	0.40±0.12	≤8.00	0.75±0.10	100	8.3-15
HST-17YG	Φ17	17.5±0.6	0.40±0.12	≤8.50	0.75±0.10	100	8.8-16
HST-18YG	Φ18	19.0±0.7	0.40±0.15	≤9.00	0.80±0.15	100	9.3-17
HST-20YG	Φ20	22.0±0.7 0	0.40±0.15	≤10.00	0.82±0.15	100	10.4-19
HST-22YG	Φ22	24.0±0.7	0.40±0.15	≤11.00	0.82±0.15	100	11.4-21
HST-25YG	Φ25	26.0±0.7	0.55±0.15	≤12.50	1.00±0.15	50	12.8-24
HST-28YG	Φ28	29.0±0.7	0.55±0.15	≤14.00	1.00±0.15	50	14.4-29
HST-30YG	Φ30	31.5±0.7	0.55±0.15	≤15.00	1.05±0.15	50	16-29
HST-35YG	Φ35	36.5±0.7	0.55±0.1	≤17.50	1.15±0.15	50	18-34
HST-40YG	Φ40	41.5±0.7	0.55±0.15	≤20.00	1.20±0.15	50	21-39
HST-50YG	Φ50	51.0±0.7	0.55±0.15	≤25.00	1.20±0.15	25	26-49
HST-60YG	Φ60	60.0±0.8	0.60±0.15	≤31.00	1.50±0.20	25	35-55
HST-70YG	Φ70	70.0±0.8	0.65±0.15	≤36.00	1.60±0.20	25	40-65
HST-80YG	Φ80	80.0±0.8	0.70±0.15	≤41.00	1.70±0.20	25	45-75
HST-90YG	Φ90	90.5±0.8	0.70±0.15	≤46.00	1.90±0.20	25	50-88
HST-100YG	Φ100	100.5±0.8	0.70±0.20	≤51.00	2.10±0.20	25	55-95
HST-120YG	Φ120	120.5±0.8	0.70±0.20	≤61.00	2.30±0.20	15	65-115
HST-150YG	Φ150	150.5±0.8	0.70±0.20	≤76.00	2.30±0.20	15	80-145
HST-180YG	Φ180	180.5±0.8	0.70±0.20	≤91.00	2.30±0.20	15	95-175